


Configured the Nagios Server side


- Nagios Core Server
- Linux Monitoring Clients

Step 1:-

- Check the Approval status pending or approved.
[In my case there status is approved so i will go forward for configured the server]
- Raise the ticket to netbackup for full OS backup.
- Take a snapshot of your Server VM.

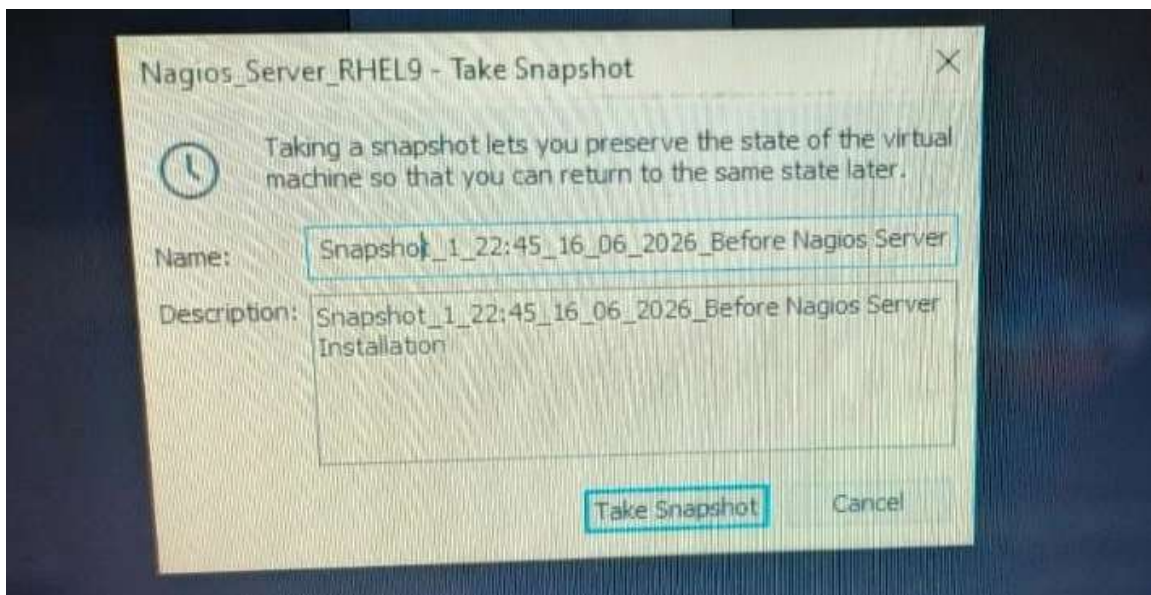

- Make sure your network adaptor is on Bridge Manually [Static IP]

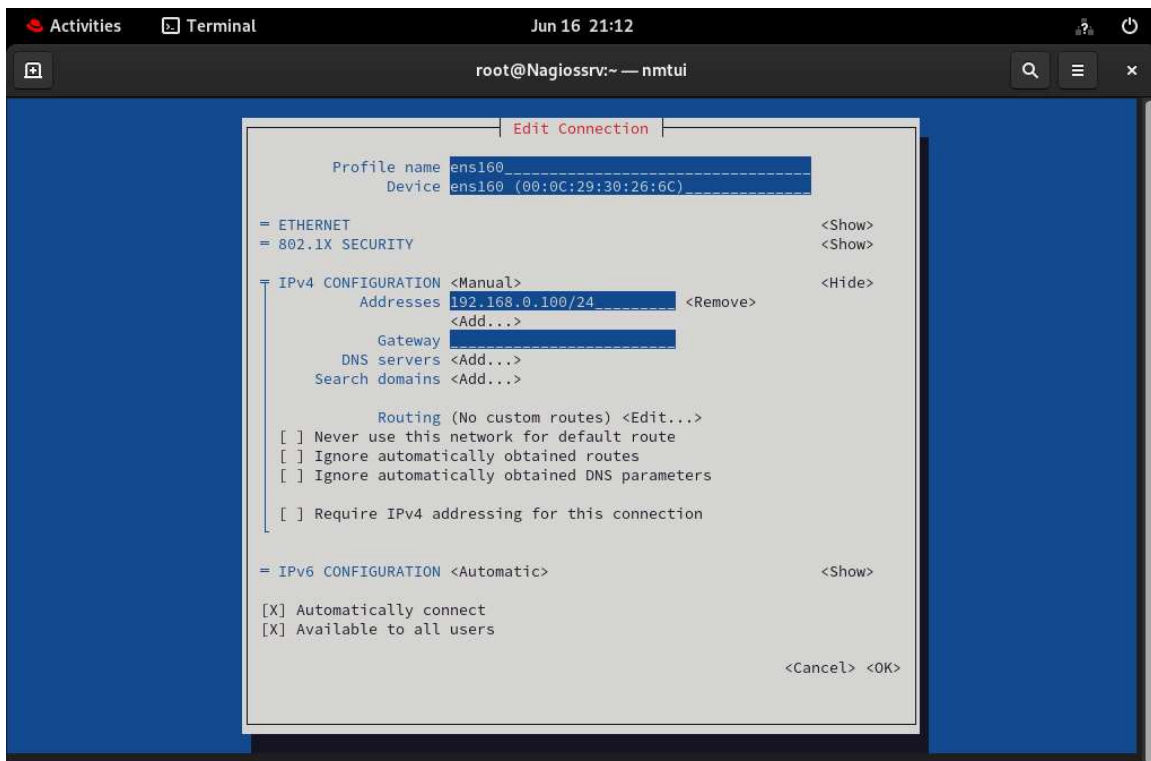

Step 2:-

- Set the hostname below command
 - ping the hostname
- # hostnamectl set-hostname Nagiossrv.avadhut.com

```

Activities Terminal Jun 15 23:49
root@localhost:~

[root@localhost ~]# hostnamectl set-hostname Nagiossrv.avadhut.com
[root@localhost ~]# hostname
Nagiossrv.avadhut.com
[root@localhost ~]# bash
[root@Nagiossrv ~]#

```

Step-:3

- Verify the IP:-
- # ifconfig or ip a s or ip a s

```
Activities Terminal Jun 16 22:46
root@Nagiossrv:~

[root@Nagiossrv ~]# ifconfig
ens160: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.0.100 netmask 255.255.255.0 broadcast 192.168.0.255
    inet6 2401:4900:ac91:bf76:20c:29ff:fe30:266c prefixlen 64 scopeid 0x0<global>
    inet6 2401:4900:ad57:c039:20c:29ff:fe30:266c prefixlen 64 scopeid 0x0<global>
    inet6 fe80::20c:29ff:fe30:266c prefixlen 64 scopeid 0x20<link>
    ether 00:0c:29:30:26:6c txqueuelen 1000 (Ethernet)
    RX packets 500590 bytes 656081684 (625.6 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 188404 bytes 18837602 (17.9 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 2283 bytes 435049 (424.8 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 2283 bytes 435049 (424.8 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

[root@Nagiossrv ~]#
```

- check the the ip & Hostname is pingig or not

```
Activities Terminal Jun 16 21:18
root@Nagiossrv:~


[root@Nagiossrv ~]# ping 192.168.0.100
PING 192.168.0.100 (192.168.0.100) 56(84) bytes of data.
64 bytes from 192.168.0.100: icmp_seq=1 ttl=64 time=0.120 ms
64 bytes from 192.168.0.100: icmp_seq=2 ttl=64 time=0.468 ms
64 bytes from 192.168.0.100: icmp_seq=3 ttl=64 time=0.133 ms
64 bytes from 192.168.0.100: icmp_seq=4 ttl=64 time=0.118 ms
64 bytes from 192.168.0.100: icmp_seq=5 ttl=64 time=0.767 ms
64 bytes from 192.168.0.100: icmp_seq=6 ttl=64 time=1.86 ms
64 bytes from 192.168.0.100: icmp_seq=7 ttl=64 time=0.111 ms
^C
--- 192.168.0.100 ping statistics ---
7 packets transmitted, 7 received, 0% packet loss, time 6132ms
rtt min/avg/max/mdev = 0.111/0.510/1.857/0.596 ms
[root@Nagiossrv ~]# ping nagiossrv
PING Nagiossrv.avadhut.com (192.168.0.100) 56(84) bytes of data.
64 bytes from Nagiossrv.avadhut.com (192.168.0.100): icmp_seq=1 ttl=64 time=0.084 ms
64 bytes from Nagiossrv.avadhut.com (192.168.0.100): icmp_seq=2 ttl=64 time=0.450 ms
64 bytes from Nagiossrv.avadhut.com (192.168.0.100): icmp_seq=3 ttl=64 time=0.861 ms
64 bytes from Nagiossrv.avadhut.com (192.168.0.100): icmp_seq=4 ttl=64 time=0.803 ms
64 bytes from Nagiossrv.avadhut.com (192.168.0.100): icmp_seq=5 ttl=64 time=0.126 ms
^C
--- Nagiossrv.avadhut.com ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4051ms
rtt min/avg/max/mdev = 0.084/0.464/0.861/0.325 ms
[root@Nagiossrv ~]#
```

```
[root@Nagiossrv ~]# ping nagios
^C
[root@Nagiossrv ~]# ping nagiossrv
PING Nagiossrv.avadhut.com (192.168.141.134) 56(84) bytes of data.
64 bytes from Nagiossrv.avadhut.com (192.168.141.134): icmp_seq=1 ttl=64 time=0.113 ms
64 bytes from Nagiossrv.avadhut.com (192.168.141.134): icmp_seq=2 ttl=64 time=0.372 ms
64 bytes from Nagiossrv.avadhut.com (192.168.141.134): icmp_seq=3 ttl=64 time=0.179 ms
64 bytes from Nagiossrv.avadhut.com (192.168.141.134): icmp_seq=4 ttl=64 time=0.181 ms
^C
--- Nagiossrv.avadhut.com ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3085ms
rtt min/avg/max/mdev = 0.113/0.211/0.372/0.096 ms
[root@Nagiossrv ~]#
```

Step:-4

Before configure the repo we will mount the /cdrom /mnt

```
# mount /dev/cdrom /mnt
```

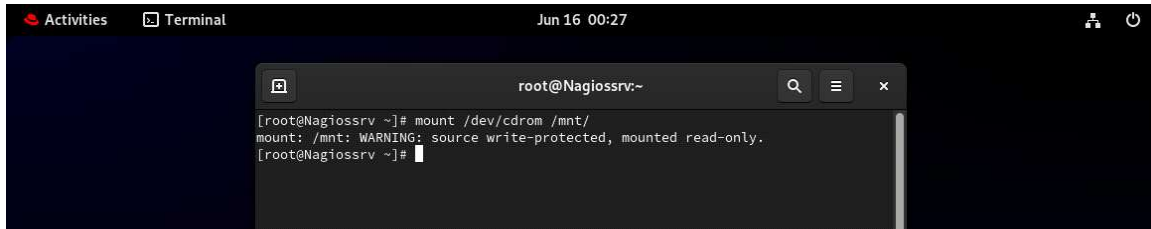


```
root@Nagiossrv:~  
[root@Nagiossrv ~]# mount /dev/cdrom /mnt/  
mount: /mnt: WARNING: source write-protected, mounted read-only.  
[root@Nagiossrv ~]#
```

Step-:5

- Check the repository for nagios server of epel-release repo.
- We required the repository epel-release if it is not there then we will configured epel-release repo.

```
# cd /etc/yum.repos.d/
```

```
# ll or ls
```

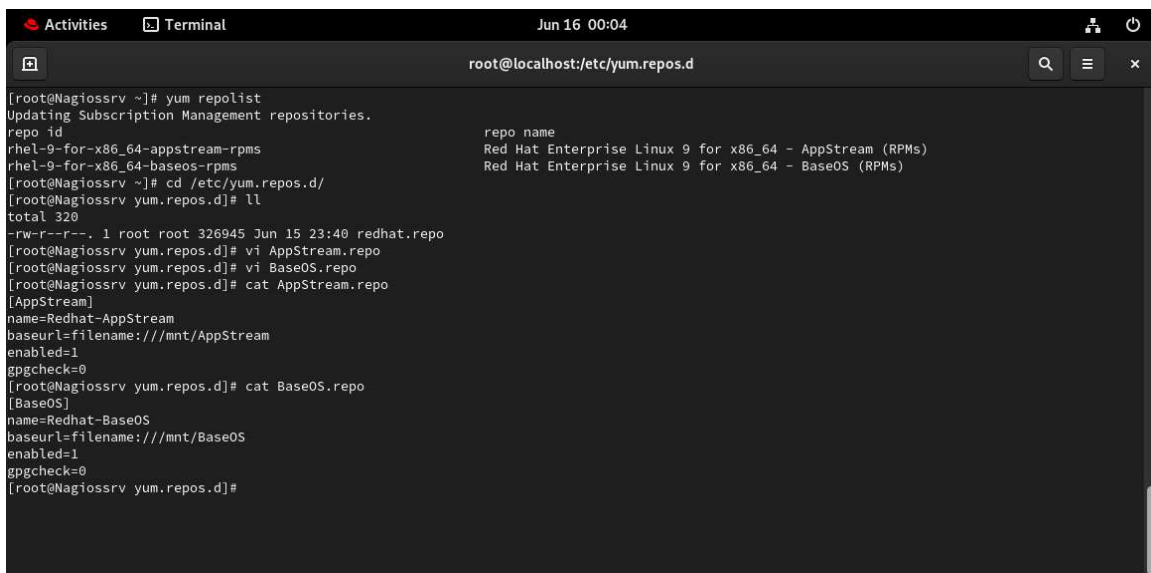

```
root@localhost:/etc/yum.repos.d  
[root@Nagiossrv ~]# yum repolist  
Updating Subscription Management repositories.  
repo id                                repo name  
rhel-9-for-x86_64-appstream-rpms       Red Hat Enterprise Linux 9 for x86_64 - AppStream (RPMs)  
rhel-9-for-x86_64-baseos-rpms          Red Hat Enterprise Linux 9 for x86_64 - BaseOS (RPMs)  
[root@Nagiossrv ~]# cd /etc/yum.repos.d/  
[root@Nagiossrv yum.repos.d]# ll  
total 320  
-rw-r--r--. 1 root root 326945 Jun 15 23:40 redhat.repo  
[root@Nagiossrv yum.repos.d]# vi AppStream.repo  
[root@Nagiossrv yum.repos.d]# vi BaseOS.repo  
[root@Nagiossrv yum.repos.d]# cat AppStream.repo  
[AppStream]  
name=Redhat-AppStream  
baseurl=filename:///mnt/AppStream  
enabled=1  
gpgcheck=0  
[root@Nagiossrv yum.repos.d]# cat BaseOS.repo  
[BaseOS]  
name=Redhat-BaseOS  
baseurl=filename:///mnt/BaseOS  
enabled=1  
gpgcheck=0  
[root@Nagiossrv yum.repos.d]#
```

Step-:6

- As we see there is not available the epel-release repo then we need Configured the epel repository using of below command

```
#dnf install -y https://dl.fedoraproject.org/pub/epel/epel-release-latest-9.noarch.rpm
```

```
Activities Terminal Jun 16 01:00
root@Nagiossrv:/etc/yum.repos.d

[root@Nagiossrv yum.repos.d]# dnf install -y https://dl.fedoraproject.org/pub/epel/epel-release-latest-9.noarch.rpm
Updating Subscription Management repositories.

This system is registered with an entitlement server, but is not receiving updates. You can use subscription-manager to assign subscriptions.

Last metadata expiration check: 0:04:26 ago on Tue 16 Jun 2026 12:55:21 AM IST.
epel-release-latest-9.noarch.rpm 1.3 kB/s | 19 kB 00:14
Dependencies resolved.
=====
Package Architecture Version Repository Size
=====
Installing:
epel-release noarch 9-10.el9 @commandline 19 k
=====
Transaction Summary
=====
Install 1 Package

Total size: 19 k
Installed size: 26 k
Downloading Packages:
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing : epel-release-9-10.el9.noarch 1/1
  Installing : epel-release-9-10.el9.noarch 1/1
  Running scriptlet: epel-release-9-10.el9.noarch 1/1
Many EPEL packages require the CodeReady Builder (CRB) repository.
It is recommended that you run /usr/bin/crb enable to enable the CRB repository.

  Verifying : epel-release-9-10.el9.noarch 1/1
Installed products updated.

Installed:
epel-release-9-10.el9.noarch

Complete!
[root@Nagiossrv yum.repos.d]#
```

Step:-7

- Verify the repository created or not at /etc/yum.repo.d.

ll or ls

```
Activities Terminal Jun 16 01:01
root@Nagiossrv:/etc/yum.repos.d

[root@Nagiossrv yum.repos.d]# ll
total 340
-rw-r--r--. 1 root root 85 Jun 16 00:51 AppStream.repo
-rw-r--r--. 1 root root 76 Jun 16 00:51 BaseOS.repo
-rw-r--r--. 1 root root 1052 Apr 22 2025 epel-cisco-openh264.repo
-rw-r--r--. 1 root root 1333 Apr 22 2025 epel.repo
-rw-r--r--. 1 root root 1432 Apr 22 2025 epel-testing.repo
-rw-r--r--. 1 root root 326945 Jun 16 00:52 redhat.repo
[root@Nagiossrv yum.repos.d]# ls
AppStream.repo BaseOS.repo epel-cisco-openh264.repo epel.repo epel-testing.repo redhat.repo
[root@Nagiossrv yum.repos.d]#
```

Step:-8

- Install the Nagios package through using the below command

dnf install -y nagios nagios-plugins-all httpd


```
Activities Terminal Jun 16 01:31
root@Nagiossrv:/etc/yum.repos.d

[root@Nagiossrv yum.repos.d]# dnf install -y nagios nagios-plugins-all httpd
Updating Subscription Management repositories.

This system is registered with an entitlement server, but is not receiving updates. You can use subscription-manager to assign subscriptions.

Last metadata expiration check: 0:02:04 ago on Tue 16 Jun 2026 01:25:14 AM IST.
Dependencies resolved.
=====
Package                                Architecture Version      Repository      Size
=====
Installing:
httpd                                  x86_64      2.4.62-13.el9_8.1  rhel-9-for-x86_64-appstream-rpms 54 k
nagios                                 x86_64      4.4.14-4.el9      epel              1.9 M
nagios-plugins-all                    x86_64      2.4.12-4.el9      epel              8.4 k
Upgrading:
selinux-policy                        noarch      38.1.75-2.el9_8   rhel-9-for-x86_64-baseos-rpms 46 k
selinux-policy-targeted               noarch      38.1.75-2.el9_8   rhel-9-for-x86_64-baseos-rpms 6.9 M
Installing dependencies:
apr                                    x86_64      1.7.0-12.el9_3    rhel-9-for-x86_64-appstream-rpms 126 k
apr-util                              x86_64      1.6.1-23.el9      rhel-9-for-x86_64-appstream-rpms 97 k
apr-util-bdb                          x86_64      1.6.1-23.el9      rhel-9-for-x86_64-appstream-rpms 14 k
esmtplib                              x86_64      1.2-19.el9        epel              52 k
fping                                 x86_64      5.0-4.el9         epel              38 k
httpd-core                            x86_64      2.4.62-13.el9_8.1 rhel-9-for-x86_64-appstream-rpms 1.5 M
httpd-filesystem                      noarch      2.4.62-13.el9_8.1 rhel-9-for-x86_64-appstream-rpms 19 k
httpd-tools                           x86_64      2.4.62-13.el9_8.1 rhel-9-for-x86_64-appstream-rpms 88 k
libesmtplib                           x86_64      1.0.6-24.el9      epel              66 k
liblockfile                           x86_64      1.14-10.el9       BaseOS            31 k
libnghttp2                            x86_64      1.2.2-1.el9_7     rhel-9-for-x86_64-appstream-rpms 260 k
```

```
Activities Terminal Jun 16 01:30
root@Nagiossrv:/etc/yum.repos.d

nagios-plugins-nwstat-2.4.12-4.el9.x86_64 nagios-plugins-oracle-2.4.12-4.el9.x86_64 nagios-plugins-overcr-2.4.12-4.el9.x86_64
nagios-plugins-perl-2.4.12-4.el9.x86_64 nagios-plugins-pgsql-2.4.12-4.el9.x86_64 nagios-plugins-ping-2.4.12-4.el9.x86_64
nagios-plugins-procs-2.4.12-4.el9.x86_64 nagios-plugins-real-2.4.12-4.el9.x86_64 nagios-plugins-rpc-2.4.12-4.el9.x86_64
nagios-plugins-sensors-2.4.12-4.el9.x86_64 nagios-plugins-smtp-2.4.12-4.el9.x86_64 nagios-plugins-snmp-2.4.12-4.el9.x86_64
nagios-plugins-ssh-2.4.12-4.el9.x86_64 nagios-plugins-ssl_validity-2.4.12-4.el9.x86_64 nagios-plugins-swap-2.4.12-4.el9.x86_64
nagios-plugins-tcp-2.4.12-4.el9.x86_64 nagios-plugins-time-2.4.12-4.el9.x86_64 nagios-plugins-uptime-2.4.12-4.el9.x86_64
nagios-plugins-users-2.4.12-4.el9.x86_64 nagios-plugins-wave-2.4.12-4.el9.x86_64 nagios-selinux-4.4.14-4.el9.noarch
net-snmp-utils-1:5.9.1-9.el9.x86_64 nginx-filesystem-2:1.20.1-28.el9_8.2.noarch perl-Clone-0.45-6.el9.x86_64
perl-Compress-Raw-Bzip2-2.101-5.el9.x86_64 perl-Compress-Raw-Zlib-2.101-5.el9.x86_64 perl-Convert-ASN1-0.27-24.el9.noarch
perl-Crypt-X509-0.54-3.el9.noarch perl-Data-Dump-1.23-18.el9.noarch perl-Digest-HMAC-1.03-29.el9.noarch
perl-Digest-SHA-1:6.02-461.el9.x86_64 perl-Encode-Locale-1.05-21.el9.noarch perl-English-1.11-481.1.el9_6.noarch
perl-File-Listing-6.14-4.el9.noarch perl-Filter-2:1.60-4.el9.x86_64 perl-FindBin-1.51-481.1.el9_6.noarch
perl-HTML-Parser-3.76-3.el9.x86_64 perl-HTML-Tagset-3.20-47.el9.noarch perl-HTTP-Cookies-6.10-4.el9.noarch
perl-HTTP-Date-6.05-7.el9.noarch perl-HTTP-Message-6.29-3.el9.noarch perl-HTTP-Negotiate-6.01-30.el9.noarch
perl-I18N-Langinfo-0.19-481.1.el9_6.x86_64 perl-IO-Compress-2.102-4.el9.noarch perl-IO-HTML-1.004-4.el9.noarch
perl-Import-Into-1.002005-19.el9.noarch perl-LWP-MediaTypes-6.04-9.el9.noarch perl-Module-Runtime-0.016-13.el9.noarch
perl-NTLM-1.09-30.el9.noarch perl-Net-HTTP-6.21-3.el9.noarch perl-PerlIO-utf8_strict-0.008-4.el9.x86_64
perl-Text-Glob-0.11-15.el9.noarch perl-TimeDate-1:2.33-6.el9.noarch perl-Try-Tiny-0.30-13.el9.noarch
perl-WWW-RobotRules-6.02-30.el9.noarch perl-encoding-4:3.00-462.el9.x86_64 perl-lib-0.65-481.1.el9_6.x86_64
perl-libwww-perl-6.53-4.el9.noarch perl-open-1.12-481.1.el9_6.noarch perl-utf8-all-0.024-14.el9.noarch
php-8.0.30-5.el9_7.x86_64 php-cli-8.0.30-5.el9_7.x86_64 php-common-8.0.30-5.el9_7.x86_64
php-fpm-8.0.30-5.el9_7.x86_64 php-mbstring-8.0.30-5.el9_7.x86_64 php-opcache-8.0.30-5.el9_7.x86_64
php-pdo-8.0.30-5.el9_7.x86_64 php-xml-8.0.30-5.el9_7.x86_64 php-xmlrpc-8.0.30-5.el9_7.x86_64
redhat-logos-httpd-90.6-1.el9.noarch rpcbind-1.2.6-7.el9.x86_64 s-nail-14.9.22-9.el9_7.x86_64
samba-client-4.17.5-102.el9.x86_64

Complete!
[root@Nagiossrv yum.repos.d]#
```

Step-9

- Enable the httpd service of using below command.

systemctl enable --now httpd


```
Activities Terminal Jun 16 01:31
root@Nagiossrv:/etc/yum.repos.d

[root@Nagiossrv yum.repos.d]# systemctl enable --now httpd
Created symlink /etc/systemd/system/multi-user.target.wants/httpd.service → /usr/lib/systemd/system/httpd.service.
[root@Nagiossrv yum.repos.d]#
```

Step-:10

- Enable the Nagios through using below command.

#systemctl enable --now nagios

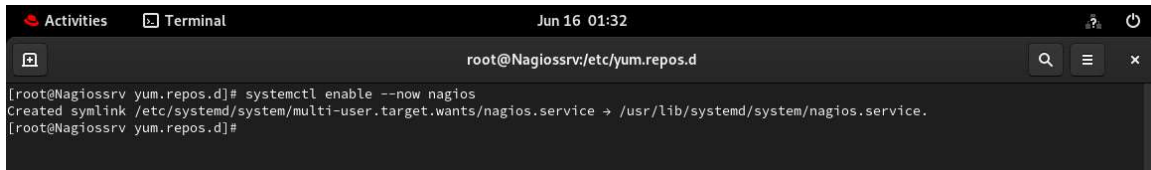


```
root@Nagiossrv:/etc/yum.repos.d
[root@Nagiossrv yum.repos.d]# systemctl enable --now nagios
Created symlink /etc/systemd/system/multi-user.target.wants/nagios.service → /usr/lib/systemd/system/nagios.service.
[root@Nagiossrv yum.repos.d]#
```

Step-:11

- Create Nagios Web Login through using the below command.

htpasswd -c /etc/nagios/passwd nagiosadmin

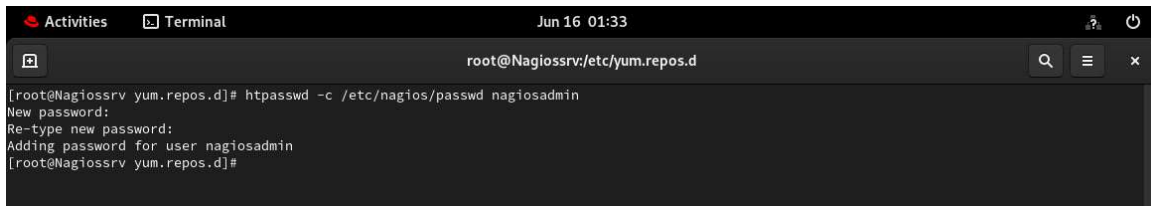

```
root@Nagiossrv:/etc/yum.repos.d
[root@Nagiossrv yum.repos.d]# htpasswd -c /etc/nagios/passwd nagiosadmin
New password:
Re-type new password:
Adding password for user nagiosadmin
[root@Nagiossrv yum.repos.d]#
```

- Restart the httpd nagios services through the below command.

systemctl restart httpd nagios


Step-:12

- Open the Firewall service through using the below command.

firewall-cmd --permanent --add-service=http

firewall-cmd --permanent --add-service=https

firewall-cmd --reload

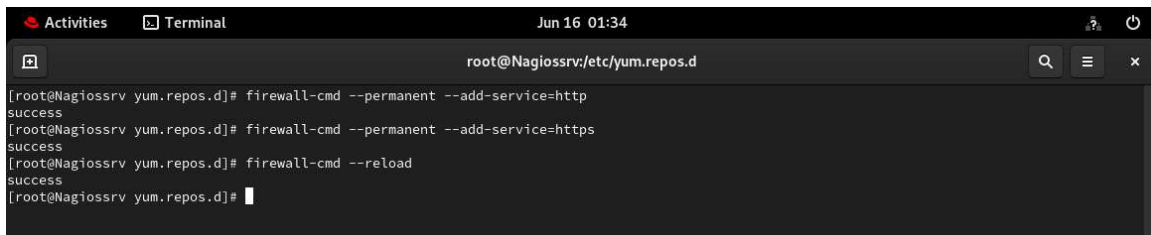


```
root@Nagiossrv:/etc/yum.repos.d
[root@Nagiossrv yum.repos.d]# firewall-cmd --permanent --add-service=http
success
[root@Nagiossrv yum.repos.d]# firewall-cmd --permanent --add-service=https
success
[root@Nagiossrv yum.repos.d]# firewall-cmd --reload
success
[root@Nagiossrv yum.repos.d]#
```

Step-13

- Check the status of Nagios service using the below command.

systemctl status nagios

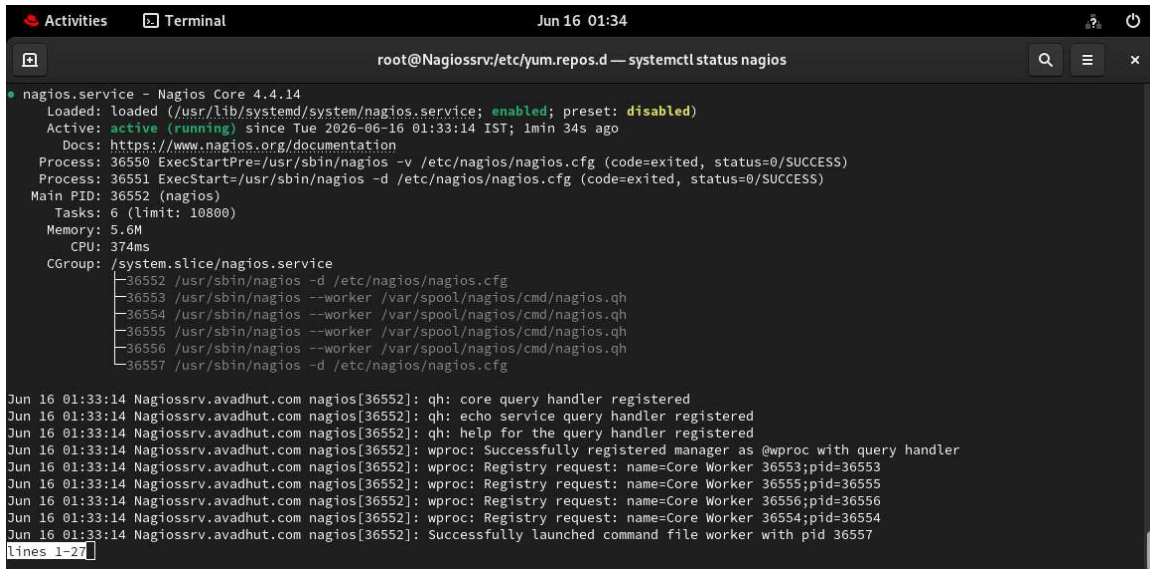

```
root@Nagiossrv:/etc/yum.repos.d — systemctl status nagios


● nagios.service - Nagios Core 4.4.14
   Loaded: loaded (/usr/lib/systemd/system/nagios.service; enabled; preset: disabled)
   Active: active (running) since Tue 2026-06-16 01:33:14 IST; 1min 34s ago
     Docs: https://www.nagios.org/documentation
   Process: 36550 ExecStartPre=/usr/sbin/nagios -v /etc/nagios/nagios.cfg (code=exited, status=0/SUCCESS)
   Process: 36551 ExecStart=/usr/sbin/nagios -d /etc/nagios/nagios.cfg (code=exited, status=0/SUCCESS)
   Main PID: 36552 (nagios)
      Tasks: 6 (limit: 10800)
     Memory: 5.6M
        CPU: 374ms
    CGroup: /system.slice/nagios.service
            └─36552 /usr/sbin/nagios -d /etc/nagios/nagios.cfg
              └─36553 /usr/sbin/nagios --worker /var/spool/nagios/cmd/nagios.qh
                └─36554 /usr/sbin/nagios --worker /var/spool/nagios/cmd/nagios.qh
                  └─36555 /usr/sbin/nagios --worker /var/spool/nagios/cmd/nagios.qh
                    └─36556 /usr/sbin/nagios --worker /var/spool/nagios/cmd/nagios.qh
                      └─36557 /usr/sbin/nagios -d /etc/nagios/nagios.cfg

Jun 16 01:33:14 Nagiossrv.avadhut.com nagios[36552]: qh: core query handler registered
Jun 16 01:33:14 Nagiossrv.avadhut.com nagios[36552]: qh: echo service query handler registered
Jun 16 01:33:14 Nagiossrv.avadhut.com nagios[36552]: qh: help for the query handler registered
Jun 16 01:33:14 Nagiossrv.avadhut.com nagios[36552]: wproc: Successfully registered manager as @wproc with query handler
Jun 16 01:33:14 Nagiossrv.avadhut.com nagios[36552]: wproc: Registry request: name=Core Worker 36553;pid=36553
Jun 16 01:33:14 Nagiossrv.avadhut.com nagios[36552]: wproc: Registry request: name=Core Worker 36555;pid=36555
Jun 16 01:33:14 Nagiossrv.avadhut.com nagios[36552]: wproc: Registry request: name=Core Worker 36556;pid=36556
Jun 16 01:33:14 Nagiossrv.avadhut.com nagios[36552]: wproc: Registry request: name=Core Worker 36554;pid=36554
Jun 16 01:33:14 Nagiossrv.avadhut.com nagios[36552]: Successfully launched command file worker with pid 36557
lines 1-27
```

Step-14

- Check the status of Httpd service using the below command.

systemctl status httpd

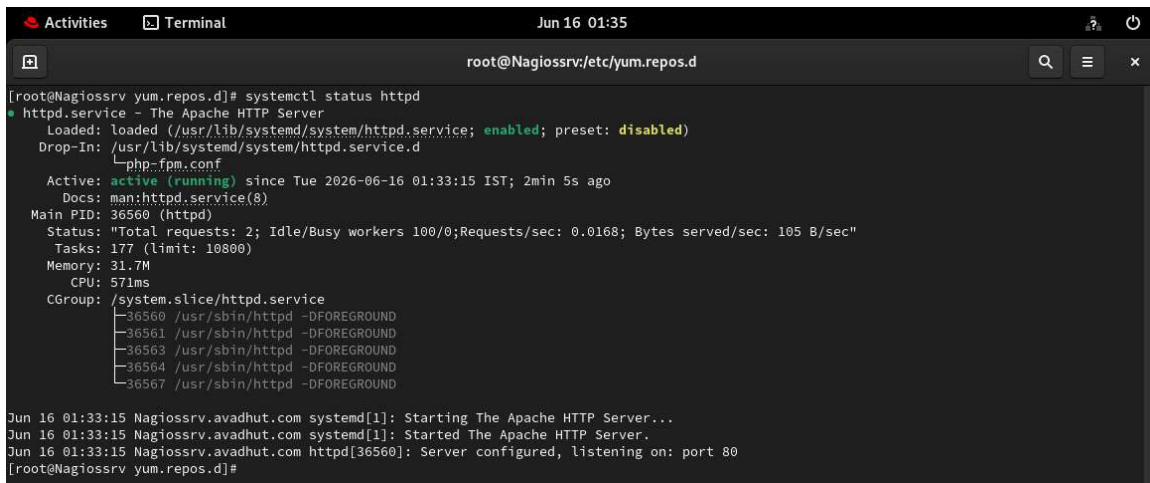

```
root@Nagiossrv:/etc/yum.repos.d


[root@Nagiossrv yum.repos.d]# systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; enabled; preset: disabled)
   Drop-In: /usr/lib/systemd/system/httpd.service.d
            └─php-fpm.conf
   Active: active (running) since Tue 2026-06-16 01:33:15 IST; 2min 5s ago
     Docs: man:httpd.service(8)
   Main PID: 36560 (httpd)
   Status: "Total requests: 2; Idle/Busy workers 100/0;Requests/sec: 0.0168; Bytes served/sec: 105 B/sec"
      Tasks: 177 (limit: 10800)
     Memory: 31.7M
        CPU: 571ms
    CGroup: /system.slice/httpd.service
            └─36560 /usr/sbin/httpd -DFOREGROUND
              └─36561 /usr/sbin/httpd -DFOREGROUND
                └─36563 /usr/sbin/httpd -DFOREGROUND
                  └─36564 /usr/sbin/httpd -DFOREGROUND
                    └─36567 /usr/sbin/httpd -DFOREGROUND

Jun 16 01:33:15 Nagiossrv.avadhut.com systemd[1]: Starting The Apache HTTP Server...
Jun 16 01:33:15 Nagiossrv.avadhut.com systemd[1]: Started The Apache HTTP Server.
Jun 16 01:33:15 Nagiossrv.avadhut.com httpd[36560]: Server configured, listening on: port 80
[root@Nagiossrv yum.repos.d]#
```


Step-15

- Now we need to create our web page at /var/www/html - using below command.

vi /var/www/html/index.html

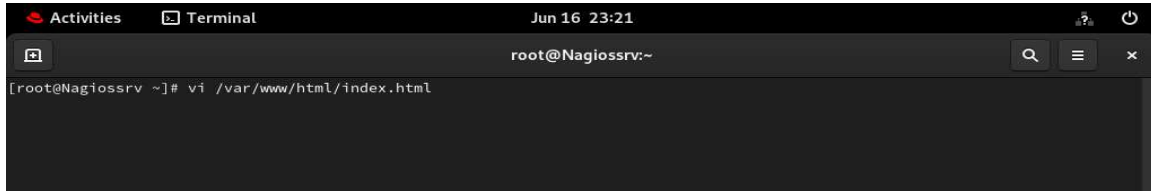


- Inside this file write below lines

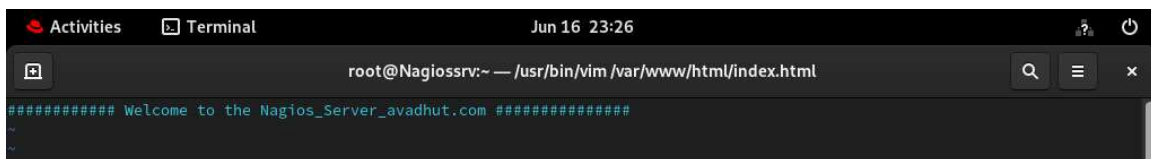

Step:16

- Go to the Browser and access the web login Page by using the IP-Address.

<http://192.168.0.100/nagios>

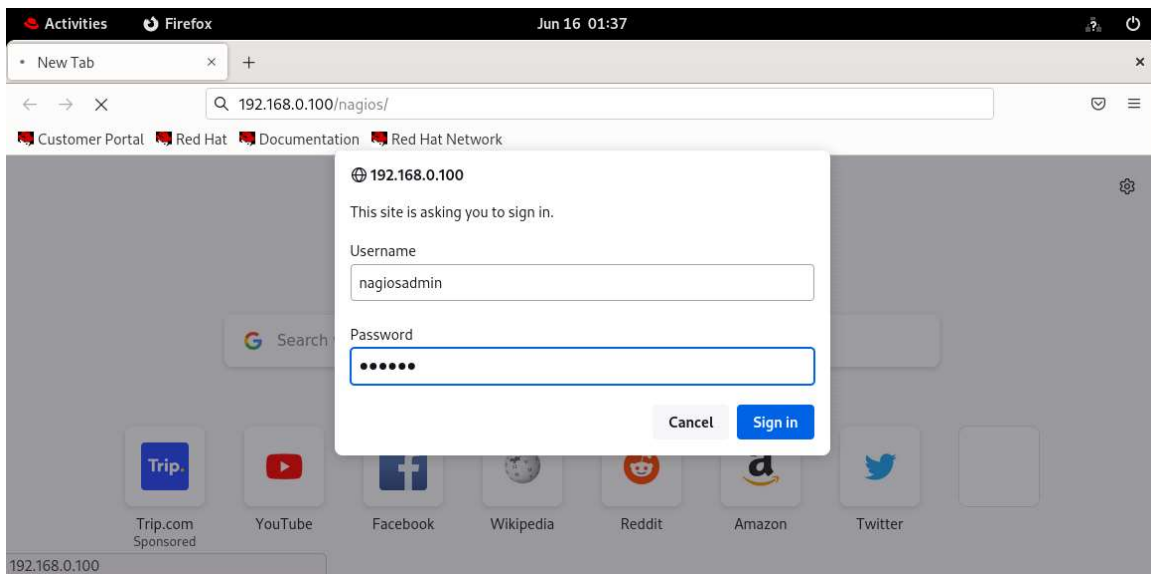

- Check the page.

<http://192.168.0.100/>




#####


Configuration of Nagios at Client side

Step 1:-

- Raise the ticket to netbackup for full OS backup.
- Take a snapshot of your Client VM.

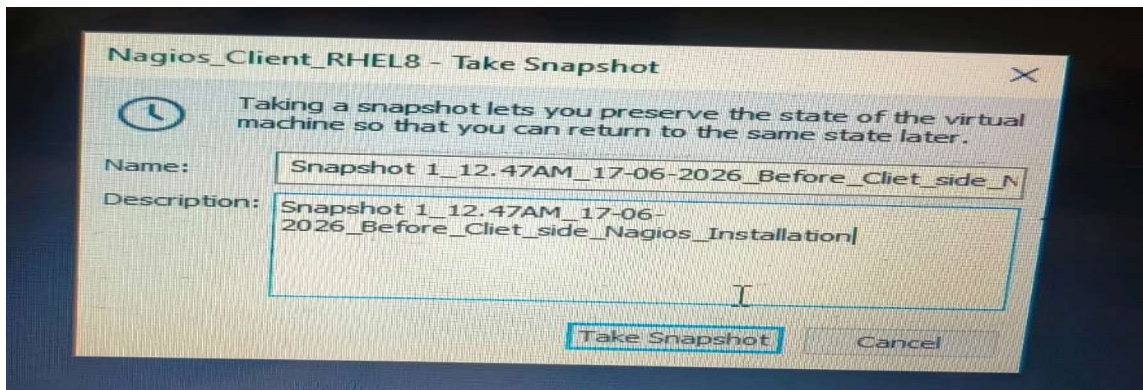

- Makesure your network adptor is on Bridge Mannually [Static IP]

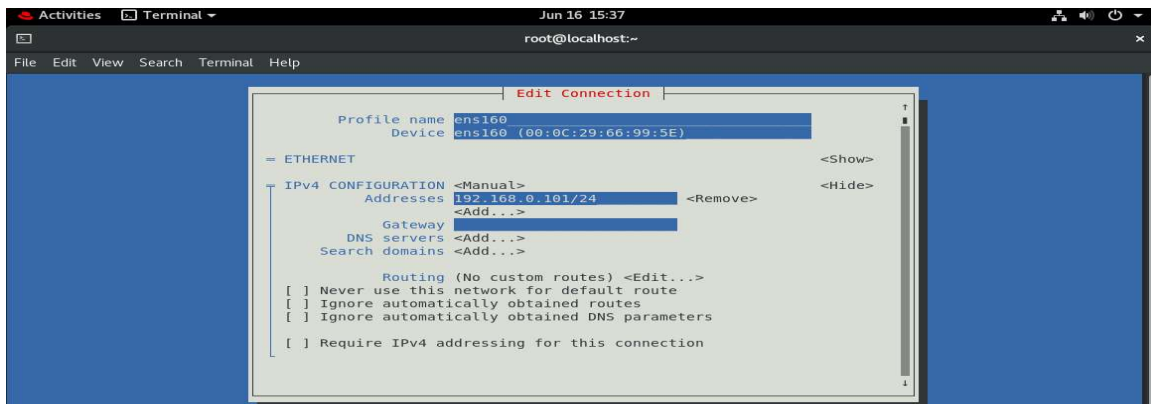


Step 2:-

- Set the hostname below command

- ping the hostname

hostnamectl set-hostname Nagiosclient.avadhut.com

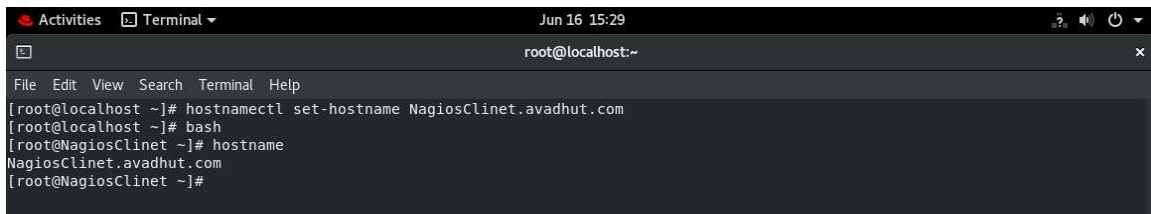

Step:3

- Verify the IP:-

ifconfig or ip a s or ip a s

```
Jun 16 15:14
root@localhost:~
File Edit View Search Terminal Help
[root@localhost ~]# ifconfig
ens160: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.0.101 netmask 255.255.255.0 broadcast 192.168.0.255
    inet6 2401:4900:ad57:c039:20c:29ff:fe66:995e prefixlen 64 scopeid 0x0<global>
    inet6 fe80::20c:29ff:fe66:995e prefixlen 64 scopeid 0x20<link>
    ether 00:0c:29:66:99:5e txqueuelen 1000 (Ethernet)
    RX packets 3311 bytes 227821 (222.4 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 61 bytes 7454 (7.2 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 548 bytes 47304 (46.1 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 548 bytes 47304 (46.1 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

virbr0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    inet 192.168.122.1 netmask 255.255.255.0 broadcast 192.168.122.255
    ether 52:54:00:13:f0:bf txqueuelen 1000 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

[root@localhost ~]#
```

- check the the ip & Hostname is pingig or not


```
Jun 16 15:32
root@localhost:~
File Edit View Search Terminal Help
[root@NagiosClnet ~]# ping 192.168.0.101
PING 192.168.0.101 (192.168.0.101) 56(84) bytes of data.
64 bytes from 192.168.0.101: icmp_seq=1 ttl=64 time=0.108 ms
64 bytes from 192.168.0.101: icmp_seq=2 ttl=64 time=0.171 ms
64 bytes from 192.168.0.101: icmp_seq=3 ttl=64 time=0.352 ms
^C
--- 192.168.0.101 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2043ms
rtt min/avg/max/mdev = 0.108/0.210/0.352/0.104 ms
[root@NagiosClnet ~]#
```

```
Jun 16 15:33
root@localhost:~
File Edit View Search Terminal Help
[root@NagiosClnet ~]# ping nagiosclient
PING NagiosClient.avadhut.com (192.168.0.101) 56(84) bytes of data.
64 bytes from NagiosClient.avadhut.com (192.168.0.101): icmp_seq=1 ttl=64 time=0.081 ms
64 bytes from NagiosClient.avadhut.com (192.168.0.101): icmp_seq=2 ttl=64 time=0.261 ms
64 bytes from NagiosClient.avadhut.com (192.168.0.101): icmp_seq=3 ttl=64 time=0.206 ms
64 bytes from NagiosClient.avadhut.com (192.168.0.101): icmp_seq=4 ttl=64 time=0.381 ms
^C
--- NagiosClient.avadhut.com ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3057ms
rtt min/avg/max/mdev = 0.081/0.232/0.381/0.108 ms
[root@NagiosClnet ~]#
```

Step-4

Before configure the repo we will mount the /cdrom /mnt

mount /dev/cdrom /mnt

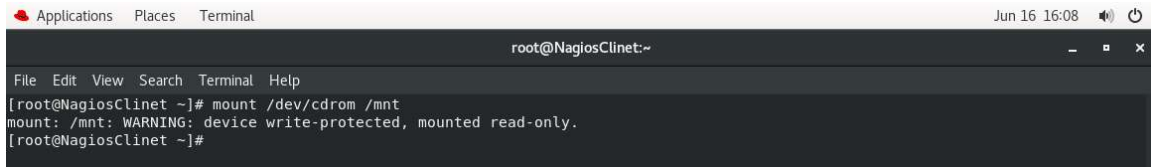


```
Applications Places Terminal Jun 16 16:08
root@NagiosClinet:~
File Edit View Search Terminal Help
[root@NagiosClinet ~]# mount /dev/cdrom /mnt
mount: /mnt: WARNING: device write-protected, mounted read-only.
[root@NagiosClinet ~]#
```

Step-:5

- Check the repository for nagios server of epel-release repo.
- We required the repository epel-release if it is not there then we will configured epel-release repo.

```
# cd /etc/yum.repos.d/
```

```
# ll or ls
```

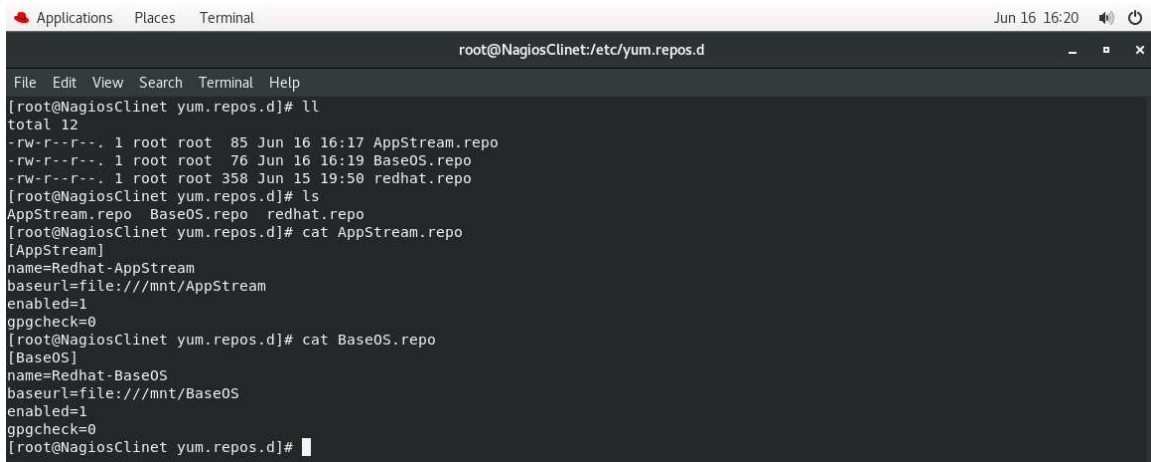

```
Applications Places Terminal Jun 16 16:20
root@NagiosClinet:/etc/yum.repos.d
File Edit View Search Terminal Help
[root@NagiosClinet yum.repos.d]# ll
total 12
-rw-r--r--. 1 root root 85 Jun 16 16:17 AppStream.repo
-rw-r--r--. 1 root root 76 Jun 16 16:19 BaseOS.repo
-rw-r--r--. 1 root root 358 Jun 15 19:50 redhat.repo
[root@NagiosClinet yum.repos.d]# ls
AppStream.repo BaseOS.repo redhat.repo
[root@NagiosClinet yum.repos.d]# cat AppStream.repo
[AppStream]
name=Redhat-AppStream
baseurl=file:///mnt/AppStream
enabled=1
gpgcheck=0
[root@NagiosClinet yum.repos.d]# cat BaseOS.repo
[BaseOS]
name=Redhat-BaseOS
baseurl=file:///mnt/BaseOS
enabled=1
gpgcheck=0
[root@NagiosClinet yum.repos.d]#
```

Step-:6

- As we see there is not available the epel-release repo then we need Configured or enable the epel repository using of below command

```
# dnf install -y epel-release
```

```
Applications Places Terminal Jun 16 16:31
root@NagiosClinet:/etc/yum.repos.d

File Edit View Search Terminal Help
[root@NagiosClinet yum.repos.d]# dnf install -y https://dl.fedoraproject.org/pub/epel/epel-release-latest-8.noarch.rpm
Updating Subscription Management repositories.
Unable to read consumer identity

This system is not registered with an entitlement server. You can use subscription-manager to register.

Last metadata expiration check: 0:02:38 ago on Tue 16 Jun 2026 04:27:50 PM EDT.
epel-release-latest-8.noarch.rpm 2.0 kB/s | 25 kB 00:12
Dependencies resolved.
=====
Package Architecture Version Repository Size
=====
Installing:
epel-release noarch 8-22.el8 @commandline 25 k
=====
Transaction Summary
=====
Install 1 Package

Total size: 25 k
Installed size: 34 k
Downloading Packages:
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
Preparing
Installing : epel-release-8-22.el8.noarch 1/1
Running scriptlet: epel-release-8-22.el8.noarch 1/1
Many EPEL packages require the CodeReady Builder (CRB) repository.
It is recommended that you run /usr/bin/crb enable to enable the CRB repository.
Verifying : epel-release-8-22.el8.noarch 1/1
Installed products updated.
```

Step:-7

- Verify the repository created or not at /etc/yum.repo.d.

ll or ls

```
Applications Places Terminal Jun 16 16:31
root@NagiosClinet:/etc/yum.repos.d

File Edit View Search Terminal Help
[root@NagiosClinet yum.repos.d]# ll
total 28
-rw-r--r-- 1 root root 85 Jun 16 16:17 AppStream.repo
-rw-r--r-- 1 root root 76 Jun 16 16:19 BaseOS.repo
-rw-r--r-- 1 root root 1680 Apr 22 2025 epel-modular.repo
-rw-r--r-- 1 root root 1332 Apr 22 2025 epel.repo
-rw-r--r-- 1 root root 1779 Apr 22 2025 epel-testing-modular.repo
-rw-r--r-- 1 root root 1431 Apr 22 2025 epel-testing.repo
-rw-r--r-- 1 root root 358 Jun 15 19:50 redhat.repo
[root@NagiosClinet yum.repos.d]#
```

Step:-8

- Install NRPE and Nagios plugins using the below command
- # dnf install -y nagios nagios-plugins-all


```
Activities Terminal Jun 17 15:40
root@Nagiossrv:~

[root@Nagiossrv ~]# dnf install -y nrpe nagios-plugins-all
Updating Subscription Management repositories.

This system is registered with an entitlement server, but is not receiving updates. You can use subscription-manager to assign subscriptions.

Extra Packages for Enterprise Linux 9 - x86_64 1.5 MB/s | 21 MB 00:13
Extra Packages for Enterprise Linux 9 openh264 (From Cisco) - x86_64 297 B/s | 2.5 kB 00:08
Red Hat Enterprise Linux 9 for x86_64 - BaseOS (RPMs) 3.3 MB/s | 121 MB 00:36
Red Hat Enterprise Linux 9 for x86_64 - AppStream (RPMs) 2.9 MB/s | 97 MB 00:33
Red Hat CodeReady Linux Builder for RHEL 9 x86_64 (RPMs) 2.9 MB/s | 19 MB 00:06
Last metadata expiration check: 0:00:02 ago on Wed 17 Jun 2026 02:32:28 PM IST.
Package nagios-plugins-all-2.4.12-4.el9.x86_64 is already installed.
Dependencies resolved.

=====
Package Architecture Version Repository Size
=====
Installing:
nrpe x86_64 4.1.2-2.el9 epel 255 k
=====

Transaction Summary
=====
Install 1 Package
=====

Total download size: 255 k
Installed size: 364 k
Downloading Packages:
nrpe-4.1.2-2.el9.x86_64.rpm 58 kB/s | 255 kB 00:04
Total 45 kB/s | 255 kB 00:05
Running transaction check
Transaction check succeeded.
```

Step 9 :

- Configure the file NRPE
- Before editing we will take a backup of this file using through this command.

```
# cp /etc/nagios/nrpe.cfg /tmp/nrpe.cfg.bkp1
```

```
Applications Places Terminal Jun 19 11:22
root@NagiosClient:~


File Edit View Search Terminal Help
[root@NagiosClient ~]# cp /etc/nagios/nrpe.cfg /tmp/nrpe.cfg.bkp1
```

- Now we configure the file by using this command.

```
Applications Places Terminal Jun 16 17:11
root@NagiosClient:/etc/yum.repos.d

File Edit View Search Terminal Help
[root@NagiosClient yum.repos.d]# vi /etc/nagios/nrpe.cfg
```

- Make changes here Locate: - allowed_hosts=127.0.0.1
- Change it too -: allowed_hosts=127.0.0.1,<NAGIOS_SERVER_IP>

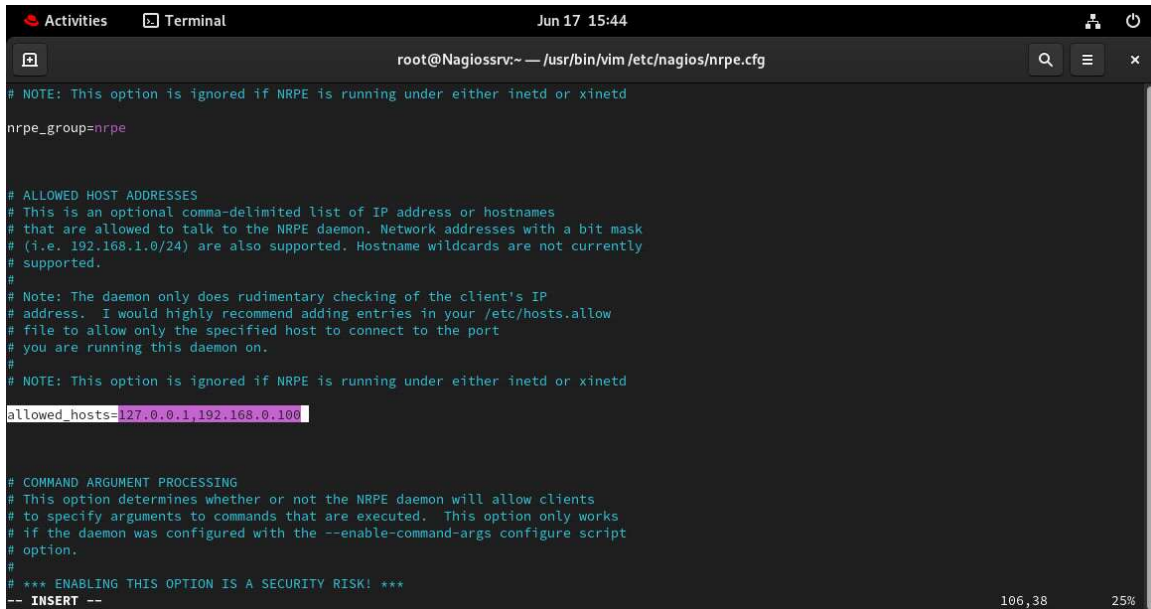

```
root@Nagiossrv:~ — /usr/bin/vim /etc/nagios/nrpe.cfg
# NOTE: This option is ignored if NRPE is running under either inetd or xinetd
nrpe_group=nrpe


# ALLOWED HOST ADDRESSES
# This is an optional comma-delimited list of IP address or hostnames
# that are allowed to talk to the NRPE daemon. Network addresses with a bit mask
# (i.e. 192.168.1.0/24) are also supported. Hostname wildcards are not currently
# supported.
#
# Note: The daemon only does rudimentary checking of the client's IP
# address. I would highly recommend adding entries in your /etc/hosts.allow
# file to allow only the specified host to connect to the port
# you are running this daemon on.
#
# NOTE: This option is ignored if NRPE is running under either inetd or xinetd
allowed_hosts=127.0.0.1,192.168.0.100

# COMMAND ARGUMENT PROCESSING
# This option determines whether or not the NRPE daemon will allow clients
# to specify arguments to commands that are executed. This option only works
# if the daemon was configured with the --enable-command-args configure script
# option.
#
# *** ENABLING THIS OPTION IS A SECURITY RISK! ***
-- INSERT --
```

Step:-10

- Configure NRPE Commands
- Create a File -

vi /etc/nagios/nrpe.d/custom.cfg

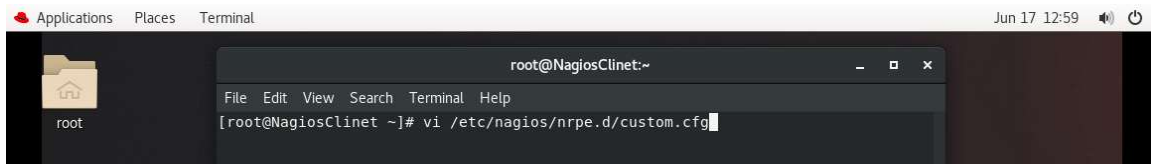

```
root@NagiosClient:~
File Edit View Search Terminal Help
[root@NagiosClient ~]# vi /etc/nagios/nrpe.d/custom.cfg
```

- Insert the Commands here in this file

A terminal window titled 'root@NagiosClnet:~' with a menu bar (File, Edit, View, Search, Terminal, Help). The terminal shows the following commands and their outputs:

```
command[check_load]=/usr/lib64/nagios/plugins/check_load -w 5,4,3 -c 10,6,4
command[check_disk]=/usr/lib64/nagios/plugins/check_disk -w 20% -c 10% -p /
command[check_mem]=/usr/lib64/nagios/plugins/check_mem.sh -w 80 -c 90
command[check_users]=/usr/lib64/nagios/plugins/check_users -w 5 -c 10
command[check_procs]=/usr/lib64/nagios/plugins/check_procs -w 250 -c 400
```


The terminal also shows some system information at the bottom, including 'at' and 'Enterprise Linux'.

Step :- 11

- Start and Enable NRPE Using through this command.


```
# systemctl enable nrpe
```

```
# systemctl restart nrpe
```

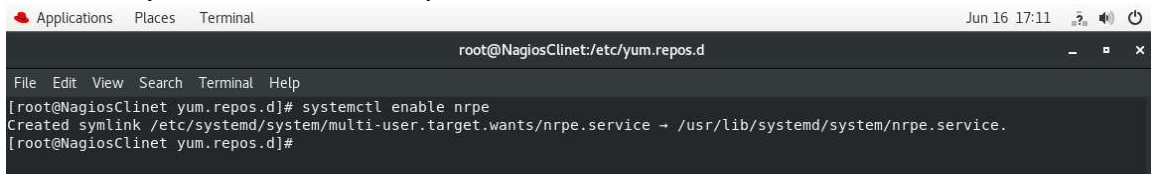A terminal window titled 'root@NagiosClnet:/etc/yum.repos.d' with a menu bar (File, Edit, View, Search, Terminal, Help). The terminal shows the command 'systemctl enable nrpe' and its output:

```
[root@NagiosClnet yum.repos.d]# systemctl enable nrpe
Created symlink /etc/systemd/system/multi-user.target.wants/nrpe.service → /usr/lib/systemd/system/nrpe.service.
[root@NagiosClnet yum.repos.d]#
```


```
# systemctl status nrpe
```

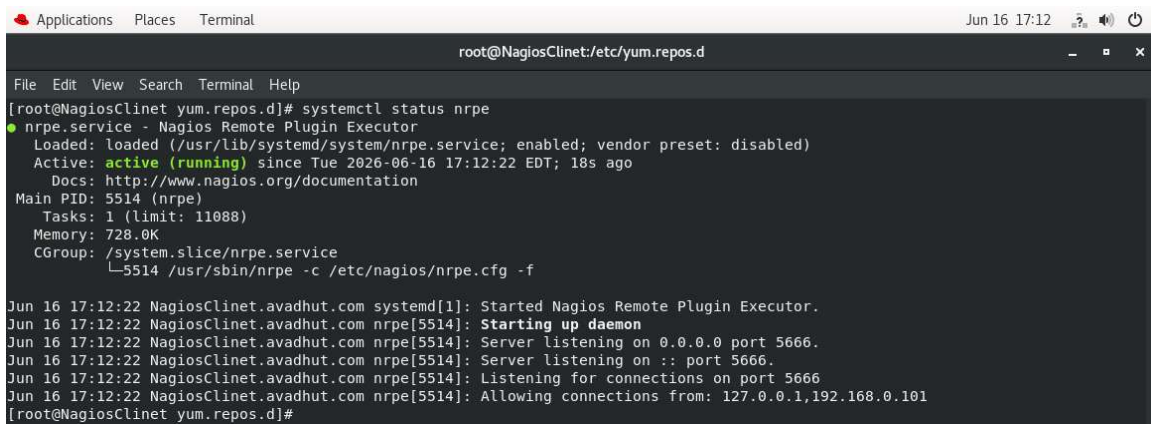A terminal window titled 'root@NagiosClnet:/etc/yum.repos.d' with a menu bar (File, Edit, View, Search, Terminal, Help). The terminal shows the command 'systemctl status nrpe' and its output:

```
[root@NagiosClnet yum.repos.d]# systemctl status nrpe
● nrpe.service - Nagios Remote Plugin Executor
   Loaded: loaded (/usr/lib/systemd/system/nrpe.service; enabled; vendor preset: disabled)
   Active: active (running) since Tue 2026-06-16 17:12:22 EDT; 18s ago
     Docs: http://www.nagios.org/documentation
   Main PID: 5514 (nrpe)
    Tasks: 1 (limit: 11088)
   Memory: 728.0K
   CGroup: /system.slice/nrpe.service
           └─5514 /usr/sbin/nrpe -c /etc/nagios/nrpe.cfg -f

Jun 16 17:12:22 NagiosClnet.avadhut.com systemd[1]: Started Nagios Remote Plugin Executor.
Jun 16 17:12:22 NagiosClnet.avadhut.com nrpe[5514]: Starting up daemon
Jun 16 17:12:22 NagiosClnet.avadhut.com nrpe[5514]: Server listening on 0.0.0.0 port 5666.
Jun 16 17:12:22 NagiosClnet.avadhut.com nrpe[5514]: Server listening on :: port 5666.
Jun 16 17:12:22 NagiosClnet.avadhut.com nrpe[5514]: Listening for connections on port 5666
Jun 16 17:12:22 NagiosClnet.avadhut.com nrpe[5514]: Allowing connections from: 127.0.0.1,192.168.0.101
[root@NagiosClnet yum.repos.d]#
```

- Check the TCP Port Listen or not

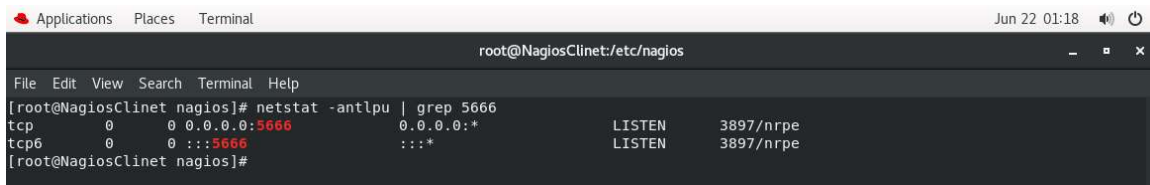

```

Applications  Places  Terminal
root@NagiosClinet:/etc/nagios

File Edit View Search Terminal Help
[root@NagiosClinet nagios]# netstat -antlpu | grep 5666
tcp        0      0 0.0.0.0:5666          0.0.0.0:*        LISTEN     3897/nrpe
tcp6       0      0 :::5666              :::*              LISTEN     3897/nrpe
[root@NagiosClinet nagios]#

```


Step:-12

- Configure Firewall using through this command.
- Allow NRPE from the Nagios server.

firewall-cmd --permanent --add-port=5666/tcp

firewall-cmd --reload

firewall-cmd --list-all

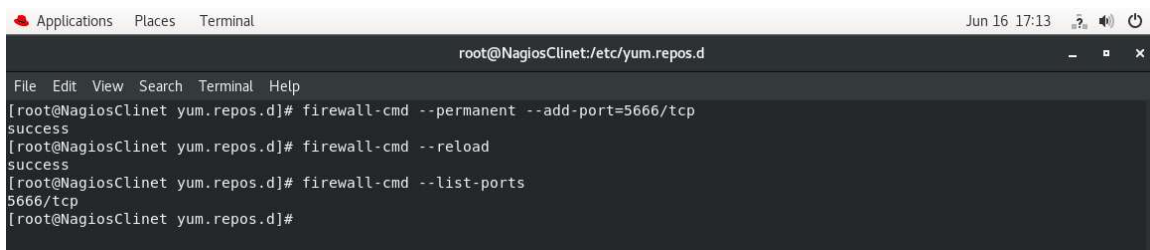

```

Applications  Places  Terminal
root@NagiosClinet:/etc/yum.repos.d


File Edit View Search Terminal Help
[root@NagiosClinet yum.repos.d]# firewall-cmd --permanent --add-port=5666/tcp
success
[root@NagiosClinet yum.repos.d]# firewall-cmd --reload
success
[root@NagiosClinet yum.repos.d]# firewall-cmd --list-ports
5666/tcp
[root@NagiosClinet yum.repos.d]#

```

- SELinux Configuration:-

getenforce

setenforce 0

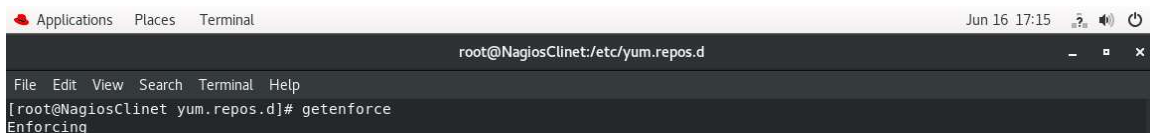

```

Applications  Places  Terminal
root@NagiosClinet:/etc/yum.repos.d


File Edit View Search Terminal Help
[root@NagiosClinet yum.repos.d]# getenforce
Enforcing

```

Step :-13

- Test Locally on Client check load average using through this command.


/usr/lib64/nagios/plugins/check_load -w 5,4,3 -c 10,8,6

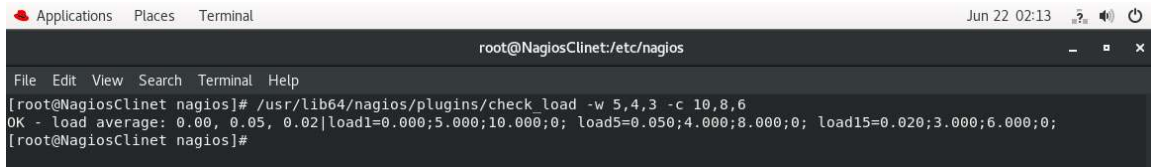

```
root@NagiosClient:/etc/nagios
File Edit View Search Terminal Help
[root@NagiosClient nagios]# /usr/lib64/nagios/plugins/check_load -w 5,4,3 -c 10,8,6
OK - load average: 0.00, 0.05, 0.02|load1=0.000;5.000;10.000;0; load5=0.050;4.000;8.000;0; load15=0.020;3.000;6.000;0;
[root@NagiosClient nagios]#
```

- Check the NRPE of using through this command.

/usr/lib64/nagios/plugins/check_nrpe -H 127.0.0.1

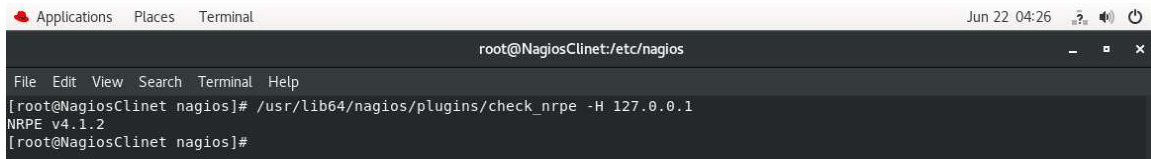


```
root@NagiosClient:/etc/nagios
File Edit View Search Terminal Help
[root@NagiosClient nagios]# /usr/lib64/nagios/plugins/check_nrpe -H 127.0.0.1
NRPE v4.1.2
[root@NagiosClient nagios]#
```

Step:-14


- Add Host Definition on Nagios Server

vi /etc/nagios/objects/rhel8-client.cfg

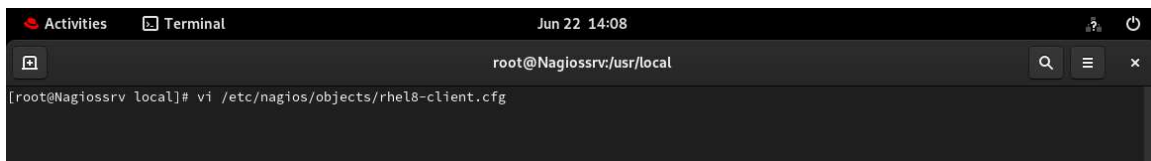

```
root@Nagiossrv:/usr/local
[ root@Nagiossrv local ]# vi /etc/nagios/objects/rhel8-client.cfg
```

- Insert the content in this file .

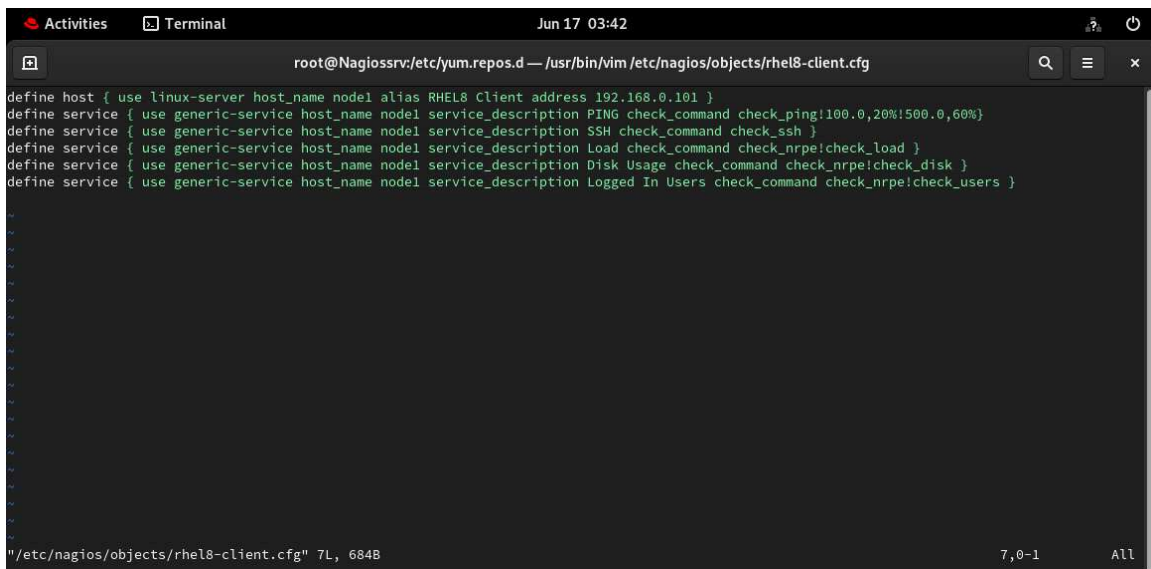


```
root@Nagiossrv:/etc/yum.repos.d — /usr/bin/vim /etc/nagios/objects/rhel8-client.cfg
define host { use linux-server host_name node1 alias RHEL8 Client address 192.168.0.101 }
define service { use generic-service host_name node1 service_description PING check_command check_ping!100.0,20%!500.0,60% }
define service { use generic-service host_name node1 service_description SSH check_command check_ssh }
define service { use generic-service host_name node1 service_description Load check_command check_nrpe!check_load }
define service { use generic-service host_name node1 service_description Disk Usage check_command check_nrpe!check_disk }
define service { use generic-service host_name node1 service_description Logged In Users check_command check_nrpe!check_users }

"/etc/nagios/objects/rhel8-client.cfg" 7L, 684B 7,0-1 All
```

Step :-15

- Verify Nagios Configuration using through this command.

/usr/sbin/nagios -v /etc/nagios/nagios.cfg

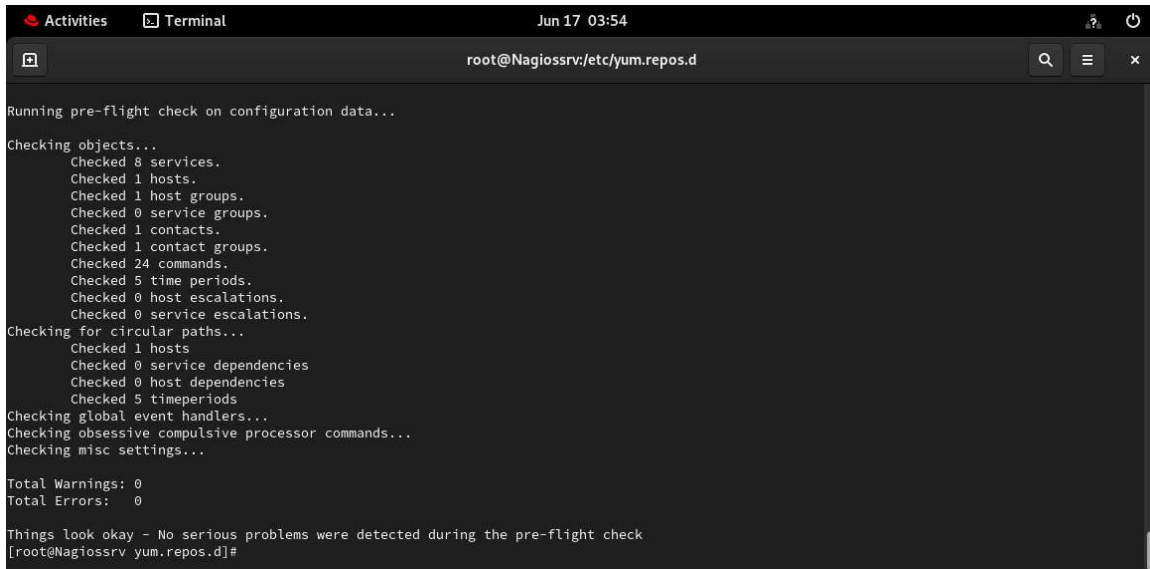A terminal window titled 'Terminal' with the date 'Jun 17 03:54' and the user 'root@Nagiossrv:/etc/yum.repos.d'. The terminal output shows the Nagios pre-flight check results. It starts with 'Running pre-flight check on configuration data...' followed by 'Checking objects...'. A list of checks follows: 'Checked 8 services.', 'Checked 1 hosts.', 'Checked 1 host groups.', 'Checked 0 service groups.', 'Checked 1 contacts.', 'Checked 1 contact groups.', 'Checked 24 commands.', 'Checked 5 time periods.', 'Checked 0 host escalations.', and 'Checked 0 service escalations.'. Then 'Checking for circular paths...' with 'Checked 1 hosts', 'Checked 0 service dependencies', 'Checked 0 host dependencies', and 'Checked 5 timeperiods'. Next is 'Checking global event handlers...', 'Checking obsessive compulsive processor commands...', and 'Checking misc settings...'. The summary shows 'Total Warnings: 0' and 'Total Errors: 0'. The final message is 'Things look okay - No serious problems were detected during the pre-flight check' followed by the prompt '[root@Nagiossrv yum.repos.d]#'.

```
Running pre-flight check on configuration data...

Checking objects...
  Checked 8 services.
  Checked 1 hosts.
  Checked 1 host groups.
  Checked 0 service groups.
  Checked 1 contacts.
  Checked 1 contact groups.
  Checked 24 commands.
  Checked 5 time periods.
  Checked 0 host escalations.
  Checked 0 service escalations.

Checking for circular paths...
  Checked 1 hosts
  Checked 0 service dependencies
  Checked 0 host dependencies
  Checked 5 timeperiods

Checking global event handlers...
Checking obsessive compulsive processor commands...
Checking misc settings...

Total Warnings: 0
Total Errors: 0

Things look okay - No serious problems were detected during the pre-flight check
[root@Nagiossrv yum.repos.d]#
```


- Things look okay - No serious problems were detect.
- Then Restart the Nagios through this command.

systemctl restart nagios

Step 16

- Test from Nagios Server

/usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101

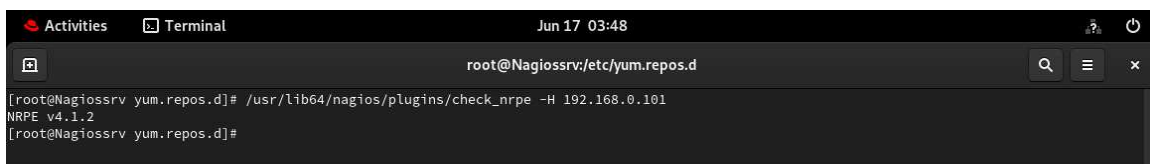A terminal window titled 'Terminal' with the date 'Jun 17 03:48' and the user 'root@Nagiossrv:/etc/yum.repos.d'. The terminal shows the command '/usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101' being executed. The output is 'NRPE v4.1.2' followed by the prompt '[root@Nagiossrv yum.repos.d]#'.

```
[root@Nagiossrv yum.repos.d]# /usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101
NRPE v4.1.2
[root@Nagiossrv yum.repos.d]#
```


- Check the Load average from Server to client using through this command.

/usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101 -c

check_load

```
# /usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101 -c  
check_disk
```

```
# /usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101 -c check_users
```

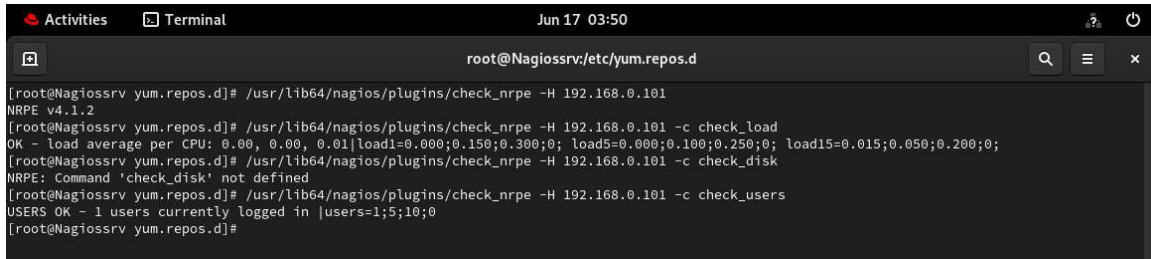A terminal window titled 'Terminal' with a timestamp of 'Jun 17 03:50'. The prompt is 'root@Nagiossrv:/etc/yum.repos.d'. The user enters the command '/usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101'. The output shows 'NRPE v4.1.2' and 'OK - load average per CPU: 0.00, 0.00, 0.01|load1=0.000;0.150;0.300;0; load5=0.000;0.100;0.250;0; load15=0.015;0.050;0.200;0;'. The user then enters '/usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101 -c check_disk'. The output is 'NRPE: Command 'check_disk' not defined'. The user then enters '/usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101 -c check_users'. The output is 'USERS OK - 1 users currently logged in |users=1;5;10;0'.

```
[root@Nagiossrv yum.repos.d]# /usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101  
NRPE v4.1.2  
[root@Nagiossrv yum.repos.d]# /usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101 -c check_load  
OK - load average per CPU: 0.00, 0.00, 0.01|load1=0.000;0.150;0.300;0; load5=0.000;0.100;0.250;0; load15=0.015;0.050;0.200;0;  
[root@Nagiossrv yum.repos.d]# /usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101 -c check_disk  
NRPE: Command 'check_disk' not defined  
[root@Nagiossrv yum.repos.d]# /usr/lib64/nagios/plugins/check_nrpe -H 192.168.0.101 -c check_users  
USERS OK - 1 users currently logged in |users=1;5;10;0  
[root@Nagiossrv yum.repos.d]#
```

- Successfully configured Nagios Server & Client.

Thank You !