



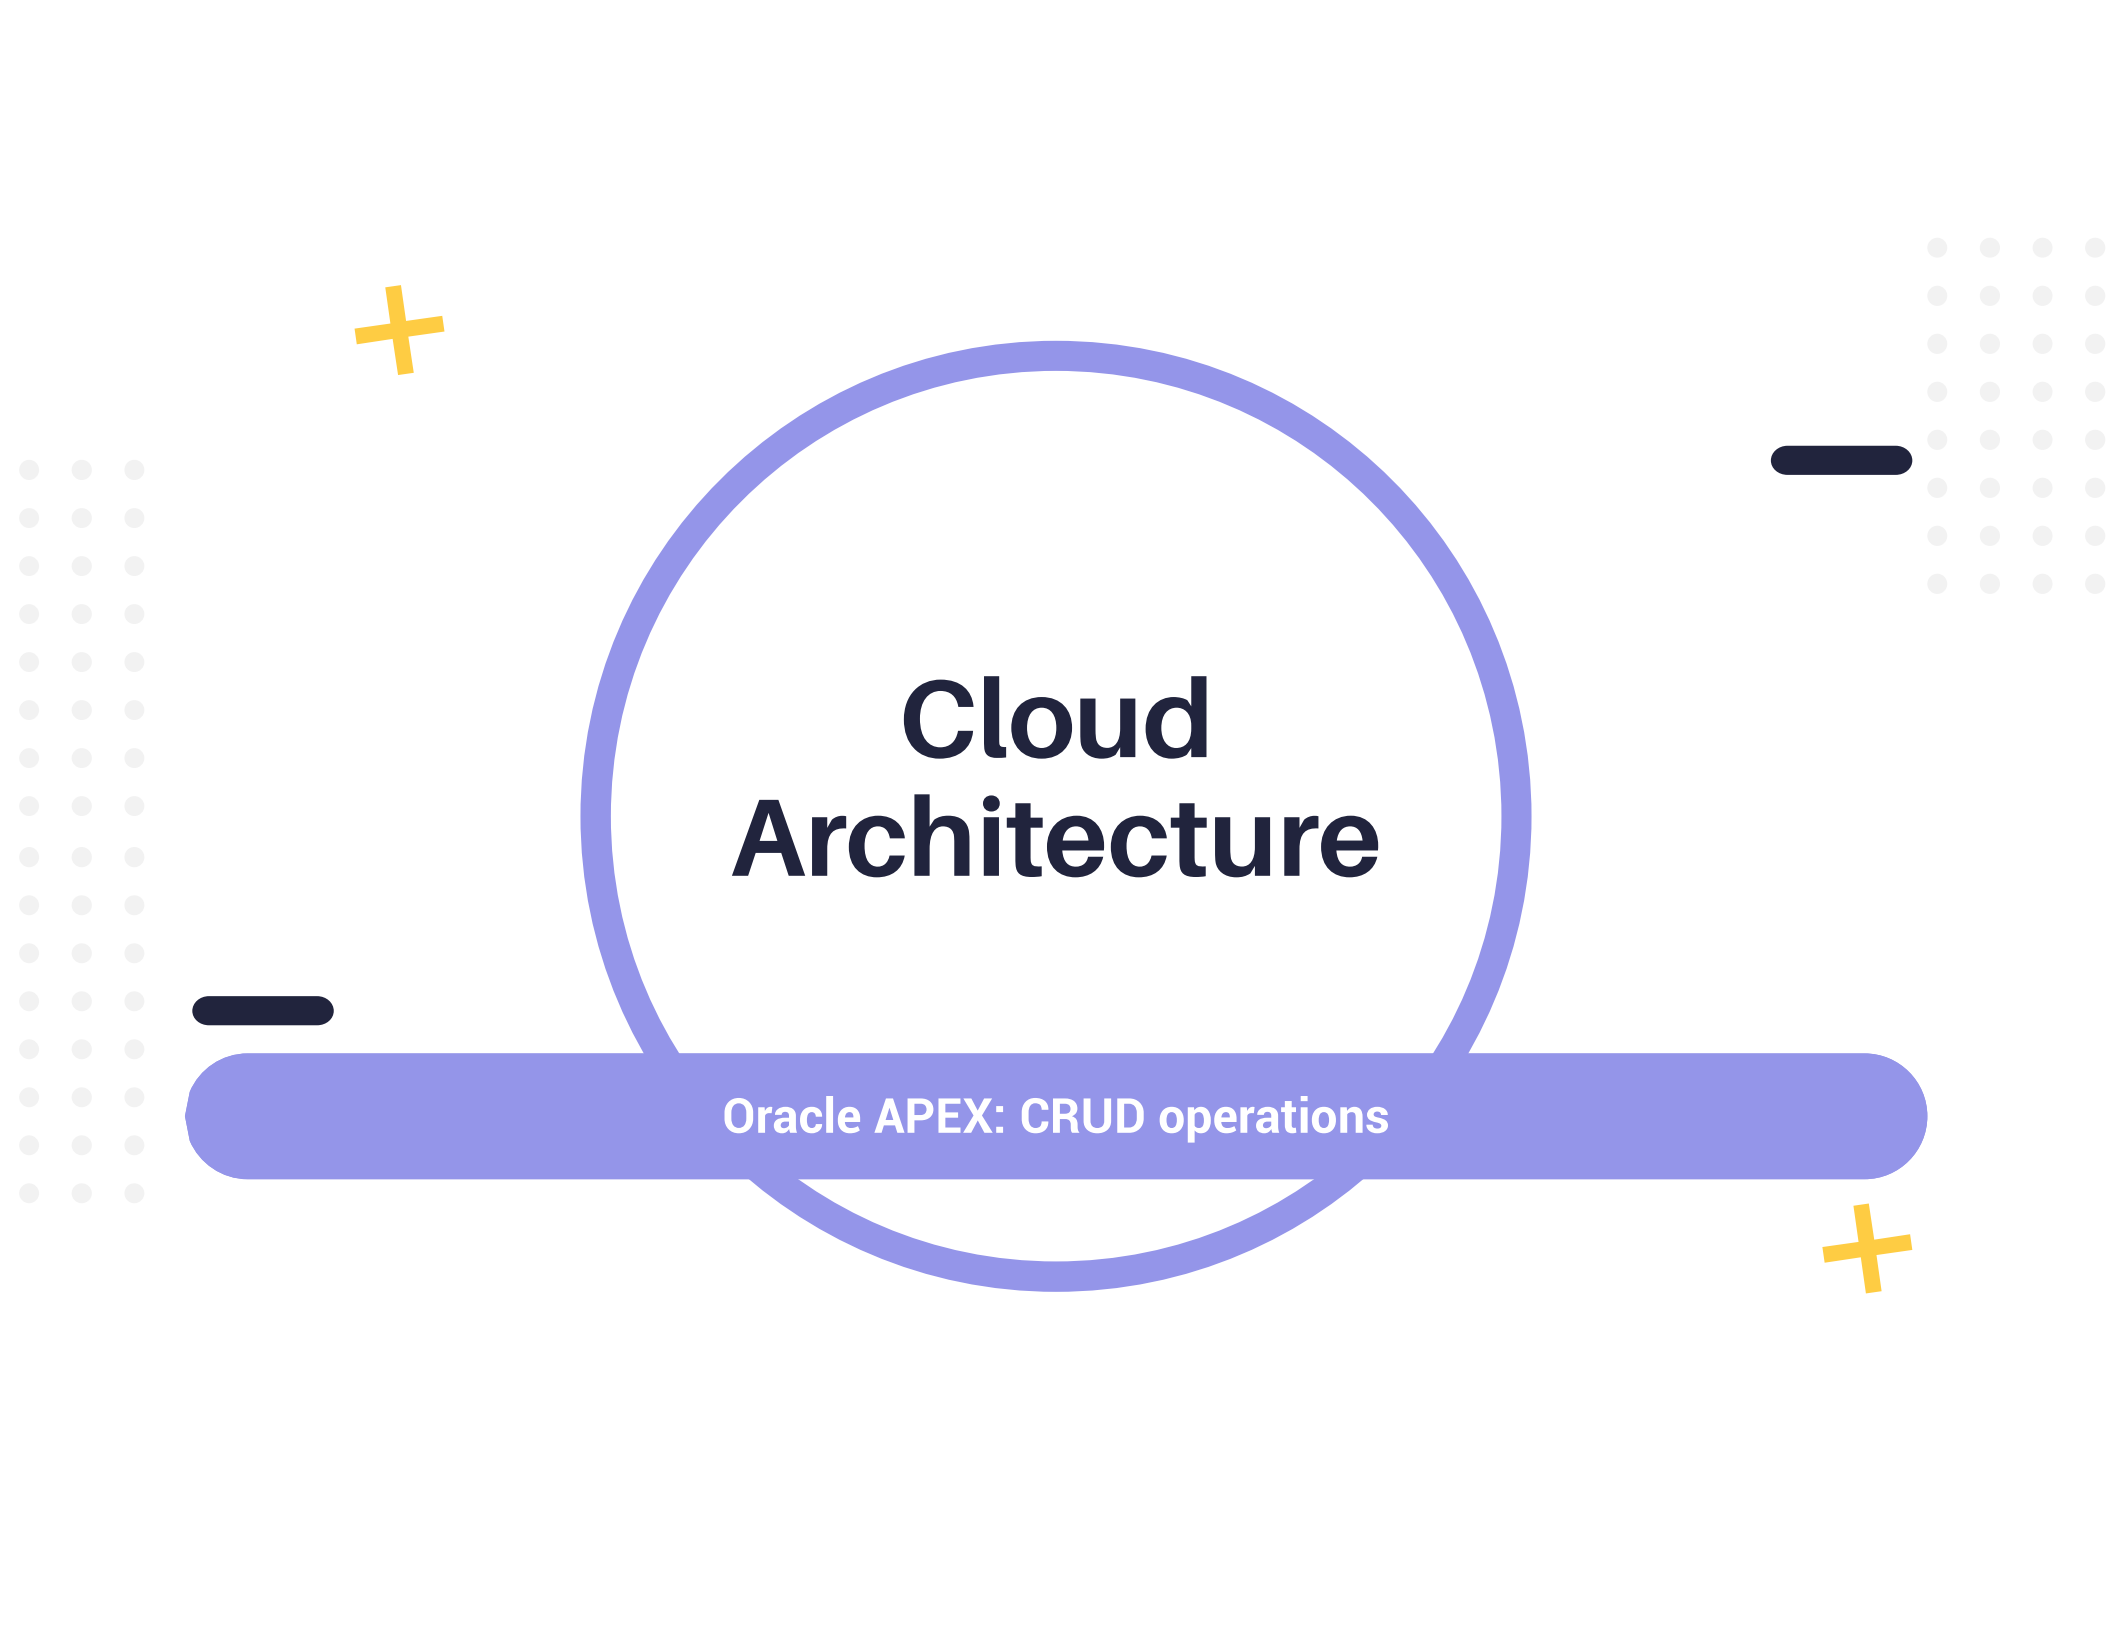

Cloud Architecture

Oracle APEX: CRUD operations




Objectives

Discuss Oracle APEX cloud architecture

Explore SQL commands in APEX

Perform SQL READ operations




Lesson prerequisites

Basic knowledge of CRUD operations

Familiar with DML statements

A screenshot of a code editor with a dark theme. It shows a React component with a state object containing 'products' and a 'render' method. The 'render' method returns a JSX element. The JSX structure includes a 'React.Fragment' containing a 'div' with 'className="py-5"', which contains another 'div' with 'className="container"'. Inside the 'container' div, there is a 'Title' component with 'name="our"' and 'title="Products"', followed by a 'div' with 'className="row"'. Inside the 'row' div, there is a 'ProductConsumer' component with a prop 'value' and a function 'console.log(value)' in its render method. The code is color-coded: keywords like 'return' and 'React.Fragment' are in pink, string literals are in green, and HTML tags are in yellow. Line numbers 10 through 25 are visible on the left margin.



```
10 state={
11   products: storeProducts
12 }
13 render() {
14   return (
15     <React.Fragment>
16       <div className="py-5">
17         <div className="container">
18           <Title name="our" title="Products">
19             <div className="row">
20               <ProductConsumer>
21                 {(value) => {
22                   console.log(value)
23                 }}
24               </ProductConsumer>
25             </div>
26           </div>
27         </div>
28       </React.Fragment>
29     )
30   }
31 }
```



Traditional architecture




Traditional architecture

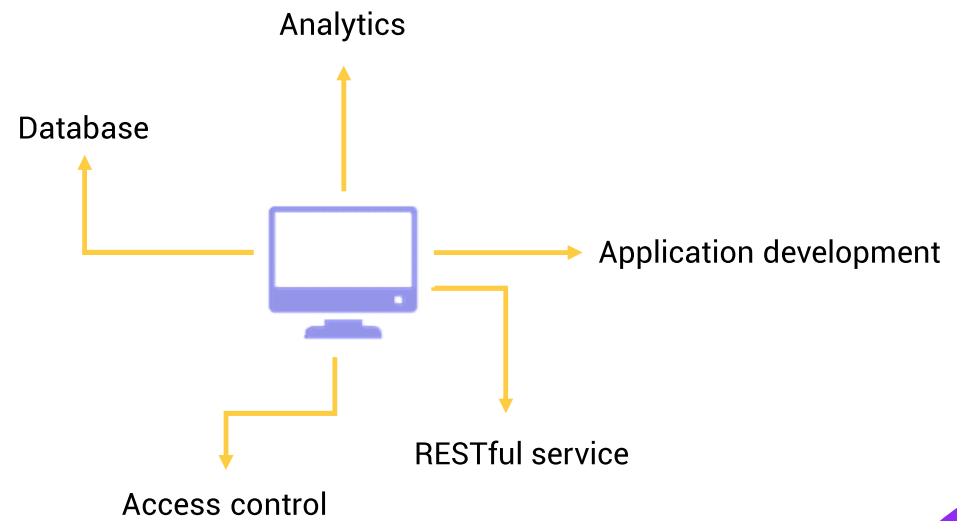



Oracle APEX architecture



Oracle APEX architecture




CRUD operations



Create



Read



Update




Delete





Practical demonstration



DEMO HERE