Week 4 APP DEV-2

2024 Aug04 Quiz-2

1. [Source Q12; MSQ]

Consider the below Vue class binding and select the most appropriate option(s).

```
<div v-bind:class="[isClassA ? classA : '', classB]"></div>
```

(a) The classes, namely “classA” and “classB” will always be applied to the divelement.

(b) The class, namely “classB” will always be applied to the div element.

(c) The class, namely “classA” will only be applied to the div element, if thevariable “isClassA” evaluates to true.

(d) The class, namely “classB” will only be applied to the div element, if no variablewith name “isClassA” exists.

[Source ans: b, c]

2. [Source Q16; MCQ]

Consider the following HTML document embedded with Vue CDN and the script file shown below.

Filename: index.html

```
<div id="app">
     <main-comp>
         <nest-comp></nest-comp>
     </main-comp>
</div>
```

Filename: script.js


```
let main_comp = {
    template: `<div style="border: 1px solid black; padding: 5px">This is
main Component</div>`
}

let nest_comp = {
    template: `<div style="border: 1px solid black; padding: 5px">This is
nested Component</div>`
}


const app = new Vue({
    components: {
        "main-comp": main_comp,
        "nest-comp": nest_comp,
    }
}).$mount('#app')
```

What will be rendered on the browser?

(a)

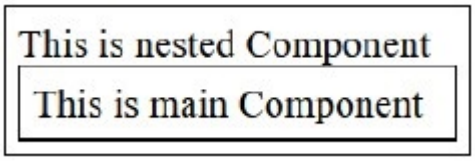


(b)

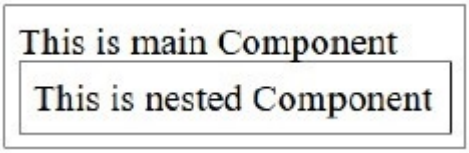

(c)



(d)



[Source ans: c]

2024 Oct27 Quiz-1

3. [Source Q2; MCQ]

Consider the following HTML, with the correct Vue 2 CDN links included.

```
<body>
  <div id="app" :class="['box', { active: isActive }]">
  Vue Component
  </div>
  <script>
    new Vue({
      el: '#app',
      data() {
        return {
          isActive: false,
        };
      },
    });
  </script>
</body>
```

What will be the final rendered class attribute of the ?

(a) box

(b) active

(c) box active

(d) box inactive

[Source ans: a]

4. [Source Q8; MCQ]

Consider the below Vue component.

```
<template>
  <div>
    <p>{{ computedMessage }}</p>
    <button @click="update">Update</button>
  </div>
</template>

<script>
export default {
  data() {
    return {
      message: 'Initial'
    };
  },
  computed: {
    computedMessage() {
      return this.message + ' - Computed';
    }
  },
  methods: {
    update() {
      this.message = 'Updated';
    }
  }
};
</script>
```

What will be displayed in the <p> element, after the button with text "Update" is clicked?

(a) "Initial - Computed"

(b) "Updated - Computed"

(c) "Initial - Computed Updated"

(d) "Updated"

[Source ans: b]

5. [Source Q9; MCQ]

Consider the following HTML, with the correct Vue 2 CDN links included.

```
<body>
    <div id="app">
        <p>pineapple 🍍</p>
        <button @click="addPineapple">Buy</button>
        <p>Amount : {{amount}}</p>
    </div>
    <script>
        new Vue({
            el: '#app',
            data() {
                return {
                    amount: '',
                    price: 40,
                }
            },
            methods: {
                addPineapple() {
                    this.amount += this.price;
                }
            }
        })
    </script>
</body>
```

What will be shown in the `amount` placeholder when the **Buy button** is clicked ***two*** times?

(a) 40

(b) 80

(c) 4040

(d) undefined

[Source ans: c]

6. [Source Q12; MCQ]

Consider the below Vue component.

```
<template>
  <div>
    <ul>
      <li v-for="item in filteredItems" :key="item.id">{{ item.name }}</li>
    </ul>
  </div>
</template>

<script>
export default {
  data() {
    return {
      items: [
        { id: 1, name: "Item 1" },
        { id: 2, name: "Item 2" },
        { id: 3, name: "Item 3" },
      ],
      filterActive: true,
    };
  },
  computed: {
    filteredItems() {
      return this.filterActive
        ? this.items.filter((item) => item.id !== 2)
        : this.items;
    },
  },
};
</script>
```

What will be displayed in the <ul> when filterActive is true?

(a) Item 1, Item 3

(b) Item 2

(c) Item 1, Item 2, Item 3

(d) The list will be empty.

[Source ans: a]

7. [Source Q17; MSQ]

What are the differences between Vue's computed properties and methods?

(a) Computed properties are cached based on their reactive dependencies,whereas methods are recalculated every time they are called.

(b) Methods can be used to perform operations that do not need to be cached.

(c) Computed properties can be used as methods if they require parameters.

(d) Methods are always reactive and update automatically when theirdependencies change.

[Source ans: a, b]

2024 Dec01 Quiz-2

8. [Source Q3; MCQ]

Consider the below Vue component.

```
<template>
  <div>
    <p>{{ message }}</p>
    <button @click="updateMessage">Change Message</button>
  </div>
</template>

<script>
export default {
  data() {
    return {
      message: 'Hello'
    };
  },
  methods: {
    updateMessage() {
      this.message = this.message === 'Hello' ? 'World' : 'Hello';
    }
  }
};
</script>
```

What will be displayed in the <p> element, after the button with text "Change Message" is clicked?

(a) Empty

(b) Error

(c) undefined

(d) World

(e) Hello

[Source ans: d]

9. [Source Q16; MSQ]

Which of the following statement(s) is/are true about Vue.js components?

(a) Components can be reused throughout the application to create modular andmaintainable code.

(b) Props are used to pass data from child components to parent components.

(c) Components can have their own lifecycle hooks independent of the parentcomponent.

(d) Data in components must be a function that returns an object to ensure eachinstance has its own copy.

[Source ans: a, c, d]

2024 Dec22 ET

10. [Source Q6; MCQ]

Consider the below Vue component.

```
<template>
  <div>
      <p v-if="isVisible">This paragraph is visible</p>
      <p v-else>This paragraph is hidden</p>
  </div>
</template>

<script>
export default {
  data() {
      return {
          isVisible: true
      };
  }
};
</script>
```

What will happen when "this.isVisible = false" is executed?

(a) The paragraph with the text "This paragraph is visible" will be displayed.

(b) The paragraph with the text "This paragraph is hidden" will be displayed.

(c) Both paragraphs will be displayed because of the v-if and v-else bindings.

(d) No change will happen since v-if and v-else do not update the DOM.

[Source ans: b]

11. [Source Q27; MCQ]

Consider the following HTML with appropriate Vue 2 CDN link attached.

```
<div id="app"></div>
    <script>
        new Vue({
            el: '#app',
            template: `
            <div>
                <p>Likes: {{ displayLikes }}</p>
                <button @click="handleLike">Like</button>
             </div>`,
            data() {
                return {
                    post: {
                        likes: 5,
                        metadata: { lastUpdated: null }
                    }
                }
            },
            computed: {
                displayLikes: {
                    get() {
                        return this.post.likes;
                    },
                    set(value) {
                        this.post.likes = value;
                    }
                }
            },
            methods: {
                handleLike() {
```

```
                Promise.resolve().then(() => {
                    this.displayLikes++;
                });
                this.displayLikes += 1;
                setTimeout(() => {
                    this.displayLikes = this.displayLikes + 1;
                }, 0);
            }
        }
    })
</script>
```

What will be rendered in the <p> tag after the `Like` button is pressed once?

(a) Likes: 5

(b) Likes: 8

(c) Likes: 6

(d) Likes: 9

[Source ans: b]

12. [Source Q32; MSQ]

Consider the following two HTML documents and the Vue app created in script.js file and select the correct option(s).

index1.html

```
<body>
    <div id="app">
        <h1 v-if="result">Hello am I visible?</h1>
    </div>
    <script src="./script.js"></script>
</body>
```

index2.html

```
<body>
    <div id="app">
        <h1 v-show="final">Hello am I visible?</h1>
    </div>
    <script src="./script.js"></script>
</body>
```

script.js

```
var app = new Vue({
    el: '#app',
    data: {
        result: false,
        final: false
    }
})
```

(a) When the directive **v-if** is falsy, it removes the entire element from the DOM.

(b) The raw HTML created with index1.html and index2.html will be exactly the same when the values of both "result" and "final" are set to true.

(c) The raw HTML created with index1.html and index2.html will be exactly the same for the current state of data.

(d) When the directive **v-show** is falsy, it removes the entire element from the DOM.

[Source ans: a, b]

2025 Feb23 Quiz-1

13. [Source Q2; MCQ]

Which of the following statements is true regarding "v-if" and "v-show" directives in VueJS?

(a) The "v-if" directive adds/removes elements from the DOM, while v-show onlytoggles visibility using CSS.

(b) The "v-show" directive adds/removes elements from the DOM, while v-if onlytoggles visibility using CSS.

(c) Both the "v-if" and "v-show" directives add/remove elements from the DOM.

(d) Both the "v-if" and "v-show" directives toggle visibility using CSS.

[Source ans: a]

14. [Source Q8; MCQ]

Consider the below VueJS application.

```
<div id="app">
  <p>{{ counter }}</p>
  <button @click="updateCounter">Click Me</button>
</div>

<script>
new Vue({
  el: '#app',
  data: {
    counter: 1,
  },
  methods: {
    updateCounter() {
      this.counter *= 2;
    },
  },
});
</script>
```

What will the "p" tag display when the button with the text "Click Me" is clicked three times?

(a) 1

(b) 4

(c) 8

(d) 16

[Source ans: c]

15. [Source Q12; MCQ]

Consider the following HTML with relevant Vue CDN link attached.

```
<div id="app">
    <div :class="{ active: isActive, 'text-danger': hasError }">
      {{ message }}
    </div>
  </div>

  <script>
    new Vue({
      el: '#app',
      data: {
        message: 'Hello!',
        isActive: true,
        hasError: false
      }
    })
  </script>
```

Given the Vue.js application above, which classes will be applied to the div containing the message?

(a) Only 'active'

(b) 'text-danger' and 'active'

(c) No classes

(d) Only 'text-danger'

[Source ans: a]

16. [Source Q13; MCQ]

Consider the following Vue2 app and the index file given below.

index.html

```
<body>
    <div id="app">
        <h4>{{ state }}</h4>
    </div>
    <script
       src="https://cdn.jsdelivr.net/npm/vue@2.7.16/dist/vue.js">
    </script>
    <script src="./script.js"></script>
</body>
</html>
```

script.js

```
const app = new Vue({
    el: '#app',
    data: {
        terminal: ['3','2','1'],
        curr_status: ["arrived", "departed", "delayed"]
    },
    computed: {
        state: () => {
            return `The flight 103 has ${this.curr_status[1]} from terminal
${this.terminal[2]}.`
        }
    }
})
```

What will be the output on the browser?

(a) The flight 103 has departed from terminal 1.

(b) The flight 103 has arrived from terminal 2.

(c) The flight 103 has delayed from terminal 3.

(d) The flight 103 has from terminal.

(e) ReferenceError

[Source ans: e]

17. [Source Q15; MCQ]

Consider the following HTML with relevant Vue CDN link attached.

```
<div id="app1">
    {{ messageA }}
  </div>
  <div id="app2">
    {{ messageB }}
  </div>

  <script>
    const vm1 = new Vue({
      el: '#app1',
      data: {
        messageA: 'Hello from App 1'
      }
    })

    const vm2 = new Vue({
      el: '#app2',
      data: {
        messageB: 'Hello from App 2'
      }
    })

    vm1.messageA = 'Updated App 1';
  </script>
```

After the code execution above, what will be displayed on the page?

(a) ”Updated App 1” and ”Hello from App 2”

(b) ”Hello from App 1” and ”Hello from App 2”

(c) ”Updated App 1” and blank second div

(d) Both divs will be blank

[Source ans: a]

2025 Mar16 Quiz-2

18. [Source Q2; MCQ]

In Vue.js reactivity system, when is a computed property re-evaluated?

(a) On every component render

(b) When one of its reactive dependencies changes

(c) At fixed time intervals

(d) Only when explicitly called

[Source ans: b]

19. [Source Q12; MCQ]

If a user clicks rapidly twice (within 500ms), what will the likes count be?

Consider the following html with relevant vue cdn links added.

```
<div id="app">
        <button @click="addLike">Like</button>
        <div>{{likes}}</div>
    </div>
    <script>
        new Vue({
            el: '#app',
            data: () => ({
                likes: 0,
                lastClick: 0
            }),
            methods: {
                addLike() {
                    if (Date.now() - this.lastClick < 500) {
                        this.likes += 2;
                    } else {
                        this.likes += 1;
                    }
                    this.lastClick = Date.now();
                }

            }
        })
    </script>
```

(a) 1

(b) 2

(c) 3

(d) 4

[Source ans: c]

2025 Apr13 ET

20. [Source Q23; MCQ]

Consider the following Vue apps in script.js and the index.html file.

script.js

```
const app1 = new Vue({
    el: '#app1',
    data: {
        value1: "VueJS",
        value2: "Frontend"
    }
})
const app2 = new Vue({
    el: '#app2',
    data: {
        value3: "JavaScript"
    }
})
```

index.html

```
<div id="app2">
     {{value1}}
     <div id="app1">
         {{value2}}
     </div>
     {{value3}}
</div>
<script src="./script.js"></script>
```

Consider the following Vue apps in script.js and the index.html file.

What will be rendered on the browser?

(a) Frontend

(b) VueJSFrontend

(c) VueJSJavaScript

(d) FrontendJavaScript

[Source ans: d]

21. [Source Q26; MSQ]

Which of the following is/are the correct usage of "v-for" directive in VueJS?

(a) item in array

(b) (item, index) of array

(c) (item, index) as array

(d) (item, index) in array

(e) Item of array

[Source ans: a, d]

2025 Jul13 Quiz-1

22. [Source Q2; MCQ]

In Vue 2, what happens when you update a data property?

(a) DOM is immediately updated without virtual DOM

(b) The page reloads

(c) The virtual DOM detects changes and updates efficiently

(d) A full component re-renders from scratch

[Source ans: c]

23. [Source Q3; MCQ]

Consider the following HTML, with the correct Vue 2 CDN links included:

Html code.

```
<div id="app">
    <h3>Shopping Cart</h3>
    <p>Items: {{itemCount}}</p>
    <p>Total Cost: ${{totalCost}}</p>
    <button @click="addItem">Add Item ($15)</button>
    <button @click="removeItem">Remove Item</button>
    <p>Status: {{status}}</p>
</div>
```

script:

```
const app = new Vue({
    el: '#app',
    data() {
        return {
            itemCount: 0,
            itemPrice: 15,
            totalCost: 0
        }
    },
    computed: {
        status() {
            if (this.itemCount === 0) {
                return 'Empty Cart';
            } else if (this.itemCount < 3) {
                return 'Few Items';
            } else {
                return 'Full Cart';
            }
        }
    },
    methods: {
        addItem() {
```

```
            this.itemCount++;
            this.totalCost += this.itemPrice;
        },
        removeItem() {
            if (this.itemCount > 0) {
                this.itemCount--;
                this.totalCost -= this.itemPrice;
            }
        }
    }
})
```

If the user clicks the "Add Item" button 3 times, then clicks the "Remove Item" button 1 time, what will be displayed for Items, Total Cost, and Status?

(a) Items: 2, Total Cost: $30, Status: Few Items

(b) Items: 2, Total Cost: $45, Status: Few Items

(c) Items: 3, Total Cost: $30, Status: Full Cart

(d) Items: 2, Total Cost: $30, Status: Full Cart

(e) Items: 1, Total Cost: $15, Status: Few Items

[Source ans: a]

24. [Source Q5; MCQ]

In Vue 2, which of the following will NOT trigger reactivity?

```
data() {
  return {
    items: [1, 2, 3],
    obj: { a: 1 }
  }
}
```

(a) this.items.push(4)

(b) this.items[0] = 10

(c) this.items = [10, 2, 3]

(d) this.obj.a = 2

[Source ans: b]

25. [Source Q7; MCQ]

Which computed property implementation is INCORRECT?

(a)

```
computed: {
  fullName() {
    return this.firstName + ' ' + this.lastName;
  }
}
```

(b)

```
computed: {
  fullName: {
    get() { return this.firstName + ' ' + this.lastName; },
    set(value) {
      const names = value.split(' ');
      this.firstName = names[0];
      this.lastName = names[1];
    }
  }
}
```

(c)

```
computed: {
  async fullName() {
    return await this.fetchFullName();
  }
}
```

(d)

```
computed: {
  fullName: function() {
    return this.firstName + ' ' + this.lastName;
  }
}
```

[Source ans: c]

26. [Source Q10; MCQ]

Consider the following Vue.js (Vue 2) code to answer the following question:

```
<div id="app">
  <my-counter :start="5"></my-counter>
</div>

<script>
  Vue.component('my-counter', {
    props: ['start'],
    data: function () {
      return {
        count: this.start
      };
    },
    template: `
              <div>
                <p>{{ count }}</p>
                <button @click="increment">Increment</button>
              </div>
             `,
    methods: {
      increment() {
        this.count++;
      }
    }
  });

  new Vue({
    el: '#app',
    data: { start: 10 }
  });
</script>
```

What will be displayed when the page loads, and what happens when you click the button?

(a) The counter starts at 10, and increments by 1 on each button click.

(b) The counter starts at 5, and increments by 1 on each button click.

(c) Nothing is rendered because the Vue component template is invalid when using Vue via CDN.

(d) Vue throws a warning about compiling templates in the browser and fails to bind the component.

[Source ans: b]

Shared context (source Q14)

Based on the above data, answer the given subquestions.

You're building a basic Vue app using **Vue 2 via CDN** to show a user's login form.

You want to:

- Show a welcome message once the user enters a name and clicks "Login".
- Bind the input using `v-model`.

But this code is yet to be tested, you have to test this code and push it to production.

```
<body>

<div id="app">
  <input v-model="username">
  <button @click="loggedIn = true">Login</button>

  <p v-if="loggedIn">
    Welcome, {{ username }}!
  </p>
</div>

<script>
  new Vue({
    el: '#app',
    data: {
      username: '',
      loggedIn: false
    }
  });
</script>

</body>
```

```
</html>
```

27. [Source Q15; MCQ]

Which line of code should be changed to make this code work properly?

(a) `<input v-model="username">` should be replaced with `<input v-bind="username">`

(b)

`@click="loggedIn = true"` should be replaced with `v-on:click="login()"`

(c)

`v-if="loggedIn"` should be replaced with `v-show="loggedIn"`

(d)

The code works correctly; no change is required.

[Source ans: d]

28. [Source Q16; MCQ]

If you wanted to make this app more maintainable by moving logic to **methods**, which line would you replace?

(a)

Replace `@click="loggedIn = true"` with `@click="login"` and define a method

(b)

Replace `<input v-model="username">` with `v-on:input="updateUsername"`

(c)

Replace `v-if="loggedIn"` with `v-else="loggedIn"`

(d)

This code is best, no changes required.

[Source ans: a]

Shared context (source Q17)

Consider the following HTML with relevant Vue 2 CDN link attached and answer the given subquestions.

Html file:

```
<div id="app">
    <div :class="[baseClass, { highlighted: isHighlighted,
          'btn-primary': isPrimary, 'btn-disabled': !isEnabled }]">
        {{ buttonText }}
    </div>
    <button @click="toggleState">Toggle State</button>
</div>
```

script

```
const app = new Vue({
    el: '#app',
    data: {
        buttonText: 'Click Me',
        baseClass: 'btn',
        isHighlighted: false,
        isPrimary: true,
        isEnabled: true
    },
    methods: {
        toggleState() {
            this.isHighlighted = !this.isHighlighted;
            this.isPrimary = !this.isPrimary;
            this.isEnabled = !this.isEnabled;
        }
    }
})
```

29. [Source Q18; MCQ]

What classes will be applied to the `<div>` initially (before any button clicks)?

(a) btn, highlighted, btn-primary

(b) btn, btn-primary

(c) baseClass, btn-primary

(d) btn, highlighted, btn-primary, btn-disabled

[Source ans: b]

30. [Source Q19; MCQ]

What classes will be applied to the `<div>` after clicking the "Toggle State" button once?

(a) btn, highlighted

(b) btn, btn-disabled

(c) btn, highlighted, btn-disabled

(d) baseClass, highlighted, btn-disabled

[Source ans: c]

2025 Aug03 Quiz-2

31. [Source Q3; MSQ]

Which of the following statements are true?

(a) JavaScript can directly import and execute `.vue` files without any preprocessing

(b) `.vue` files typically contain template, script, and style sections

(c) `.vue` files must be compiled (e.g., via Vue CLI or Vite) before they can run in the browser

(d) You can load a `.vue` file directly in a <script> tag in plain HTML

[Source ans: b, c]

2025 Aug31 ET

32. [Source Q3; MCQ]

What does ”reactivity” mean in the context of frontend frameworks like Vue.js?

(a) The component will reload when data changes

(b) All function calls become asynchronous

(c) It disables direct access to state

(d) The DOM updates automatically when the underlying reactive data changes

[Source ans: d]

33. [Source Q15; MCQ]

Consider this HTML and Vue setup:

index.html

```
<div id="app1">{{ message }}</div>
<div id="app2">{{ message }}</div>
<script src="app.js" />
```

app.js

```
new Vue({
  el: '#app1',
  data: { message: 'Hello from App 1' }
});

new Vue({
  el: '#app2',
  data: { message: 'Hello from App 2' }
});
```

What will be rendered on the browser?

(a) App 1 only shows data

(b) Both show “Hello from App 2”

(c) Both show “Hello from App 1”

(d) Each renders its own message independently

[Source ans: d]

34. [Source Q20; MSQ]

Consider the below Vue class binding and select the most appropriate option(s):

```
<div v-bind:class="{ active: isActive, 'text-bold': hasBoldText, disabled:
!isEnabled }"></div>
```

(a) The class ”active” will only be applied to the div element if the variable”isActive” evaluates to true.

(b) The class ”disabled” will be applied to the div element when the variable”isEnabled” evaluates to false.

(c) The class ”text-bold” will always be applied to the div element regardless ofthe ”hasBoldText” variable value.

(d) All three classes (”active”, ”text-bold”, ”disabled”) will always be applied to thediv element.

(e) If ”isEnabled” is undefined, the ”disabled” class will not be applied to the divelement.

(f) The class ”text-bold” will only be applied if the variable ”hasBoldText” existsand evaluates to a truthy value.

[Source ans: a, b, f]

Shared context (source Q21)

Given the following component setup, answer the given subquestions

Component: Task.vue

```vue
<template>
  <div>
    <button @click="toggleShowCompleted">
      {{ showCompleted ? 'Hide' : 'Show' }} Completed
    </button>

    <ul>
      <li v-for="task in filteredTasks" :key="task.id">
        <span>{{ task.name }} - {{ task.status }}</span>
        <button @click="markComplete(task.id)">Mark Complete</button>
      </li>
    </ul>

    <p>Total Completed: {{ completedCount }}</p>
  </div>

</template>

<script>
export default {
  data() {
    return {
      showCompleted: false,
      tasks: [
        { id: 1, name: 'Learn Vue', status: 'incomplete' },
        { id: 2, name: 'Build Project', status: 'incomplete' },
        { id: 3, name: 'Test App', status: 'complete' }
      ]
    }
;
```

Scenario

1. The component is loaded. 2. User clicks ”Mark Complete” for the task named Build Project.
3. User clicks ”Show Completed” button again.

```
  },
  computed: {
    filteredTasks() {
      if (this.showCompleted) return this.tasks;
      return this.tasks.filter(function (task) {
        return task.status !== 'complete';
      });
    },
    completedCount() {
      return this.tasks.reduce(function (acc, task) {
        return acc + (task.status === 'complete' ? 1 : 0);
      }, 0);
    }
  },
  methods: {
    markComplete(id) {
      const task = this.tasks.find(function (t) {
        return t.id === id;
      });
      if (task && task.status === 'incomplete') {
        task.status = 'complete';
      }
    },
    toggleShowCompleted() {
      this.showCompleted = !this.showCompleted;
    }
  }
};
</script>
```

35. [Source Q22; MCQ]

After step 2 (Mark Completed is clicked), what tasks are shown?

(a) Learn Vue

(b) Learn Vue, Build Project, Test App

(c) Test App only

(d) None

[Source ans: a]

36. [Source Q23; MCQ]

After step 3 (Mark Complete is clicked on Build Project), how many completed tasks are reported in the UI?

(a) 1

(b) 2

(c) 3

(d) 0

[Source ans: b]

37. [Source Q24; MSQ]

Which of the following are true about this component's behavior?

(a) The `filteredTasks` logic won't work properly if we used arrow functions for the `filter` method.

(b) Using non-arrow functions in computed properties allows correct `this` access to Vue instance.

(c) `filteredTasks` and `completedCount` will both update reactively when a task's status is changed.

(d) The `@click="markComplete(task.id)"` usage correctly preserves reactivity.

[Source ans: c, d]

2025 Oct26 Quiz-1

38. [Source Q2; MSQ]

Which of the following Vue 2 template syntaxes are valid?

(a) `{{ message }}` for interpolation

(b) `v-bind:title="msg"` for binding attributes

(c) `v-on:@click="doSomething"` for click event binding

(d) `<input v-model="inputValue"></input>` for two-way binding

[Source ans: a, b, d]

39. [Source Q3; MSQ]

Which of the following statements about Vue 2 templates are correct?

(a) v-if removes elements from DOM when false

(b) v-show toggle initiates re-render of the Vue component

(c) v-bind can bind attributes and class dynamically

(d) Vue 2 templates must use double curly braces for all text interpolation

[Source ans: a, c]

40. [Source Q7; MCQ]

Match the following Vue 2 directives in Column A with their correct functionality in Column B:

Column A	Column B
1. v-bind	A. Creates two-way data binding between form inputs and Vue data properties
2. v-model	B. Conditionally shows or hides elements using CSS display property
3. v-on	C. Binds HTML attributes or component properties to Vue data expressions
4. v-show	D. Attaches event listeners to DOM elements for handling user interactions
5. v-cloak	E. Prevents the flash of un-compiled template content before Vue initializes

(a) 1-C, 2-D, 3-A, 4-E, 5-B

(b) 1-A, 2-C, 3-B, 4-D, 5-E

(c) 1-C, 2-A, 3-D, 4-B, 5-E

(d) 1-E, 2-A, 3-D, 4-C, 5-B

[Source ans: c]

41. [Source Q8; MCQ]

Consider the following HTML, with the correct Vue 2 CDN links included

```
<body>
    <div id="app">
        <p>Coffee</p>
        <button @click="orderCoffee">Order</button>
        <p>Total Cost: {{totalCost}}</p>
        <p>Order Count: {{orderCount}}</p>
    </div>
    <script>
        new Vue({
            el: '#app',
            data() {
                return {
                    totalCost: '0',
                    unitPrice: 25,
                    orderCount: 0
                }
            },
            methods: {
                orderCoffee() {
                    this.totalCost += this.unitPrice;
                    this.orderCount++;
                }
            }
        })
    </script>
</body>
```

What will be displayed for "`Total Cost`" and "`Order Count`" when the Order button is clicked three times?

(a) `Total Cost: 75, Order Count: 3`

(b) `Total Cost: 02525, Order Count: 3`

(c) `Total Cost: 252525, Order Count: 3`

(d) `Total Cost: 0252525, Order Count: 3`

[Source ans: d]

42. [Source Q11; SA]

Consider the following HTML and JavaScript, assume Vue 2 CDN link to be already included.

index.html:

```
<div id="app">
  <p v-for="n in numbers">{{ n }}</p>
</div>
<script src="app.js" />
```

app.js:

```
var app = new Vue({
  el: "#app",
  data: { numbers: [1, 2, 3] },
});

app.data.numbers.push(4);
```

How many <p> elements will be rendered?

[Source ans: 3]

2025 Dec18 ET

43. [Source Q18; MCQ]

A developer creates a Vue component using both v-if and v-show directives on different elements with initially false conditions. Later, the conditions are changed to true. What is the key difference in how these two directives handle the DOM?

(a) v-if removes the element from DOM when false, v-show only changes CSS display property

(b) v-show removes the element from DOM when false, v-if only changes CSS display property

(c) Both v-if and v-show re-mount the element and re-run lifecycle hooks

(d) Both directives are identical in their functionality; they just have different naming conventions

[Source ans: a]

Shared context (source Q26)

Consider the Vue application.

```
<div id="app">
   <p>{{ expensive }}</p>
   <button @click="calculate">Calculate</button>
 </div>
 <script>
   new Vue({
     el: "#app",
     data: {
       a: 1,
       b: 2,
       time: 0,
     },
     computed: {
       expensive() {
         console.log("computed run");
         let s = 0;
         for (let i = 0; i < 10000000; i++) s += i;
         return s + this.a + this.b;
       },
     },
     methods: {
       calculate() {
         this.time = Date.now();
       },
     },
   });
 </script>
```

Based on the above data, answer the given subquestions.

44. [Source Q27; MCQ]

What happens when the user clicks the calculate button?

(a) expensive() runs again because the DOM updates

(b) expensive() does NOT run again because its dependencies did not change

(c) Vue recomputes all computed properties on any state change

(d) Nothing is displayed

[Source ans: b]

45. [Source Q28; MCQ]

Under which condition will the computed property expensive() re-run?

(a) When this.time changes

(b) The user clicks anywhere on the DOM

(c) Either this.a or this.b changes

(d) When Date.now() changes

[Source ans: c]

2026 Mar15 Quiz-1

46. [Source Q6; MCQ]

Consider the following Vue application with markup index.html and javascript file app.js. index.html:

```
<div id="app">
      <h4>total payable amount is {{totalPayableAmount}}</h4>
</div>
<script src = "app.js"> </script>
```

app.js:

```
const app = new Vue({
  el: '#app',
  data: {
       principal: 0,
       annualInterestRate: 0,
       duration: 0,
       totalPayableAmount: 0,
  },
  computed: {
    simpleInterest() {
      return (this.principal * this.annualInterestRate * this.duration) /
100
    },
  },
})

appData = [
  [2000, 10, 2],
  [3000, 20, 3],
  [5000, 30, 4],
]
let handler = setInterval(() => {
  data = appData.pop()
  app.principal = data[0]
  app.annualInterestRate = data[1]
  app.duration = data[2]
  app.totalPayableAmount += app.simpleInterest
}, 1000)
```

What will be rendered by the browser after 4 seconds?

(a) total payable amount is 6000

(b) total payable amount is 8200

(c) total payable amount is 1800

(d) total payable amount is 7800

[Source ans: b]

2026 Apr06 Quiz-2

47. [Source Q16; MSQ]

Consider the following HTML index.html and JavaScript app.js for a Vue application: File: index.html

```
<div id="app">
  <p v-if="isVisible">Hello</p>
  <p v-show="isVisible">World</p>
  <button @click="toggle">Toggle</button>
</div>
```

File: app.js

```
new Vue({
  el: "#app",
  data: {
    isVisible: false
  },
  methods: {
    toggle() {
      this.isVisible = !this.isVisible;
    }
  }
});
```

Which of the following statements is/are TRUE?

(a) On initial page load, neither “Hello” nor “World” is visible in the browser.

(b) On initial page load, the element using v-show exists in the DOM but is hidden.

(c) After clicking the Toggle button once, both “Hello” and “World” become visible.

(d) The v-if directive hides elements using CSS.

(e) The v-show directive removes elements from the DOM when the condition is false.

[Source ans: a, b, c]

2026 May06 ET

48. [Source Q15; MCQ]

Match the Vue directive in Directive with its correct functionality in Description using Vue.js.

Directive	Description
1. `v-if`	A. Two-way data binding between input and data
2. `v-for`	B. Conditionally renders elements in the DOM
3. `v-bind`	C. Binds HTML attributes dynamically
4. `v-model`	D. Renders a list of items

(a) 1-A, 2-D, 3-C, 4-B

(b) 1-D, 2-B, 3-C, 4-A

(c) 1-B, 2-C, 3-D, 4-A

(d) 1-B, 2-D, 3-C, 4-A

[Source ans: d]

Shared context (source Q28)

Consider the following Vue.js application:

```
<div id="app">
  <p>{{ bigNumber }}</p>
  <button @click="calculate">Calculate</button>
</div>

<script>
new Vue({
  el: "#app",
  data: {
    a: 1,
    b: 2,
    time: 0,
  },
  computed: {
    bigNumber() {
      console.log("computed run");
      let s = 0;
      for (let i = 0; i < 10000000; i++) s += i;
      return s + this.a + this.b;
    },
  },
  methods: {
    calculate() {
      this.time = Date.now();
    },
  },
});
</script>
```

Based on the above data, answer the given subquestions.

49. [Source Q29; MCQ]

How many times will ”computed run” be logged in the console during the initial render?

(a) 0

(b) 1

(c) Multiple times due to the loop

(d) Depends on user interaction

[Source ans: b]

50. [Source Q30; MCQ]

If the `calculate()` method is modified as follows:

```
calculate() {
  this.a = this.a + 1;
}
```

What will happen when the button is clicked?

(a) `bigNumber()` will not run again

(b) `bigNumber()` will run again because a dependency changed

(c) Only time will update

(d) Vue will throw an error

[Source ans: b]

51. [Source Q31; MCQ]

Why is `bigNumber()` defined as a computed property instead of a method?

(a) Computed properties are always faster than methods

(b) Methods cannot access data properties

(c) Computed properties are cached based on their dependencies

(d) Computed properties run only once

[Source ans: c]

2026 Jul16 Quiz-1

52. [Source Q9; MCQ]

Which of the following Vue directives are correctly matched with their purpose?

(a) v-show → fetching api

(b) v-for → Iteration over lists

(c) v-bind → Conditional rendering

(d) v-model → Event handling only

[Source ans: b]

53. [Source Q11; MSQ]

Identify the issue in the following Vue.js code:

```
<div id="app">
  <p>{{ message }}</p>
  <button @click="changeMessage">Click</button>
</div>

<script>
new Vue({
  el: '#app',
  data: {
    message: "Hello"
  },
  methods: {
    changeMessage: () => {
      this.message = "Updated"
    }
  }
})
</script>
```

Why does the `message` value not update correctly when the button is clicked?

(a) `v-on` should be used instead of `@click`

(b) Arrow functions do not bind their own `this`

(c) `data` should be a function in all Vue instances

(d) Vue.js does not support external methods

[Source ans: b]

2026 Sep13 ET

54. [Source Q15; MCQ]

Match each Vue directive with its correct description:

Directive	Description
1. v-if	A.Two-way binding between input and data
2. v-for	B.Conditionally renders DOM elements
3. v-bind	C.Binds HTML attributes dynamically
4. v-model	D. Renders a list of items

(a) 1-A, 2-D, 3-C, 4-B

(b) 1-D, 2-B, 3-C, 4-A

(c) 1-B, 2-D, 3-C, 4-A

(d) 1-B, 2-C, 3-D, 4-A

[Source ans: c]

Shared context (source Q28)

Read the following Vue 2 component code carefully (using the Options API via CDN) and answer the given sub questions.

```
<div id="app">
  <p>{{ price }}</p>
  <p>{{ discountedPrice }}</p>
</div>

<script>
new Vue({
  el: "#app",
  data: {
    price: 100,
    discount: 10,
    logCount: 0
  },
  computed: {
    discountedPrice() {
      console.log("computing...");
      return this.price - this.discount;
    }
  },
  watch: {
    price(newVal, oldVal) {
      this.logCount++;
      console.log(`${oldVal} -> ${newVal}`);
    }
  }
});
</script>
```

55. [Source Q29; MCQ]

If `discountedPrice` is accessed three times in a row in the template without price or discount changing in between, how many times does `"computing..."` get logged?

(a) 0

(b) 1

(c) 2

(d) 3

[Source ans: b]