


Lab 2

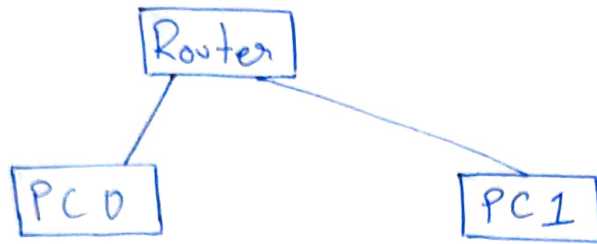

In this exp. we use a router and two PC's. Since router and PCs are on two different levels, we have to use cross-over wires to connect the PCs to the router. To check this connection we can ping one system from the other.

Output :-

PC0 replies from 10.0.0.20 : bytes = 32 time = 10ms
PC0 replies from 10.0.0.20 : bytes = 32 time = 9ms
PC0 replies from 10.0.0.20 : bytes = 32 time = 5ms
PC0 replies from 10.0.0.20 : bytes = 32 time = 4ms