

Linux Class 1 - Practice Task

Practice of pwd, ls, mkdir, touch, rm, cd, tree and man

Submitted by: Shivakumar

Date: 22 September 2026

This is my practice for class 1. It is my first Linux class, so I tried every command from the notes slowly in my own Ubuntu terminal. I made one folder called practice1 and did everything inside it. All screenshots are from my own terminal.

What is Linux and the terminal

From the notes, Linux is an operating system just like Windows and macOS. It helps us to manage files and folders, programs, memory, hardware and users. Linux is used a lot in servers, cloud, software development, networking, cyber security and embedded systems.

In Windows we mostly use the mouse to make folders and delete files. In Linux we can do the same things by typing commands in the terminal. That is what I practised below.

pwd, ls and mkdir

pwd

ls

mkdir batch14


mkdir mysuru mandya hassan

mkdir batch14/students

mkdir kerala/kochi

mkdir -p kerala/kochi

tree

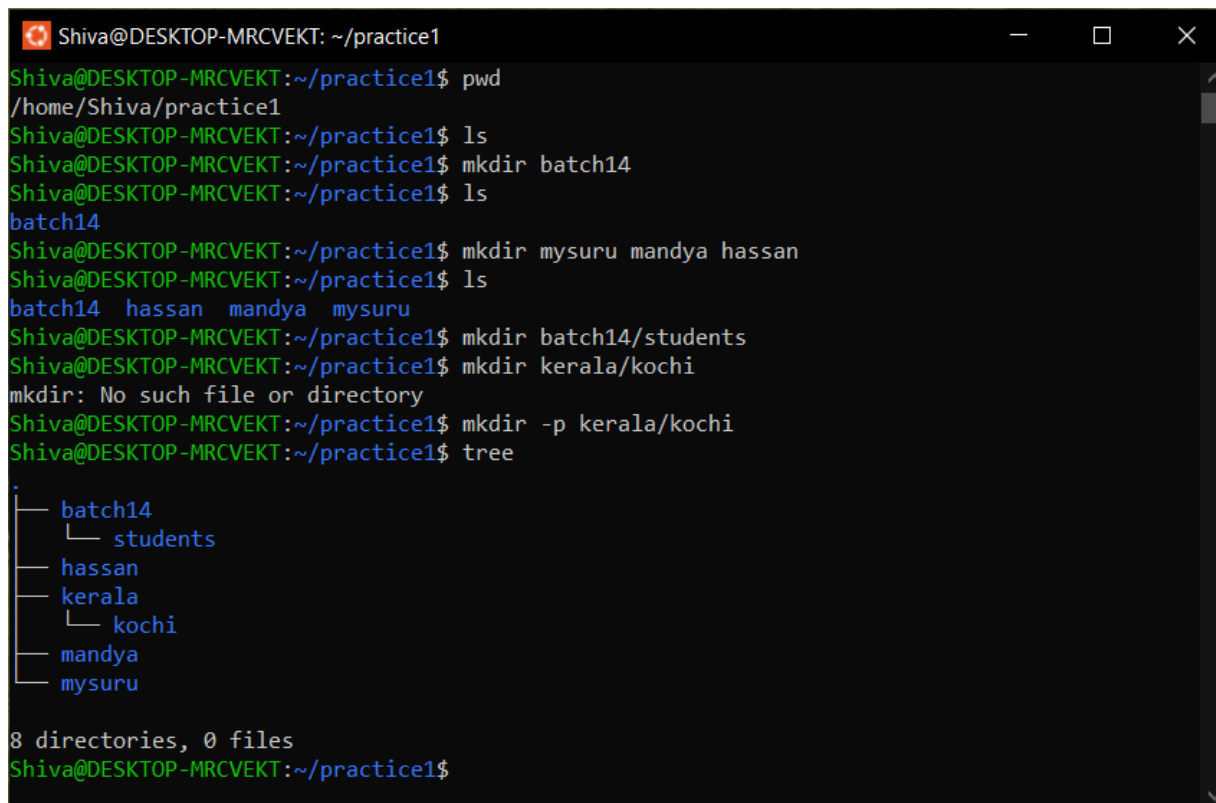

```
Shiva@DESKTOP-MRCVEKT: ~/practice1
Shiva@DESKTOP-MRCVEKT:~/practice1$ pwd
/home/Shiva/practice1
Shiva@DESKTOP-MRCVEKT:~/practice1$ ls
Shiva@DESKTOP-MRCVEKT:~/practice1$ mkdir batch14
Shiva@DESKTOP-MRCVEKT:~/practice1$ ls
batch14
Shiva@DESKTOP-MRCVEKT:~/practice1$ mkdir mysuru mandya hassan
Shiva@DESKTOP-MRCVEKT:~/practice1$ ls
batch14  hassan  mandya  mysuru
Shiva@DESKTOP-MRCVEKT:~/practice1$ mkdir batch14/students
Shiva@DESKTOP-MRCVEKT:~/practice1$ mkdir kerala/kochi
mkdir: No such file or directory
Shiva@DESKTOP-MRCVEKT:~/practice1$ mkdir -p kerala/kochi
Shiva@DESKTOP-MRCVEKT:~/practice1$ tree
.
├── batch14
│   └── students
├── hassan
├── kerala
│   └── kochi
├── mandya
└── mysuru

8 directories, 0 files
Shiva@DESKTOP-MRCVEKT:~/practice1$
```

Screenshot 1: making folders and seeing them with ls and tree.

pwd showed /home/Shiva/practice1. That is the folder I am working in right now.

The first ls showed nothing, because the folder was empty. After mkdir batch14, ls showed batch14 in blue colour. Blue means it is a folder.

mkdir mysuru mandya hassan made 3 folders in one command. I used names of districts from Karnataka.


mkdir batch14/students made a students folder inside batch14. This worked because batch14 was already there.

But mkdir kerala/kochi gave an error: No such file or directory. This is because the kerala folder was not there yet. When I added -p it worked, and it made both kerala and kochi inside it. So -p is for making the parent folder also.

tree showed everything like a tree. It is easy to see which folder is inside which folder.

Making and deleting files

```
touch file1.txt
touch notes.txt marks.txt timetable.txt
ls
rm file1.txt
rm marks.txt timetable.txt
ls
```

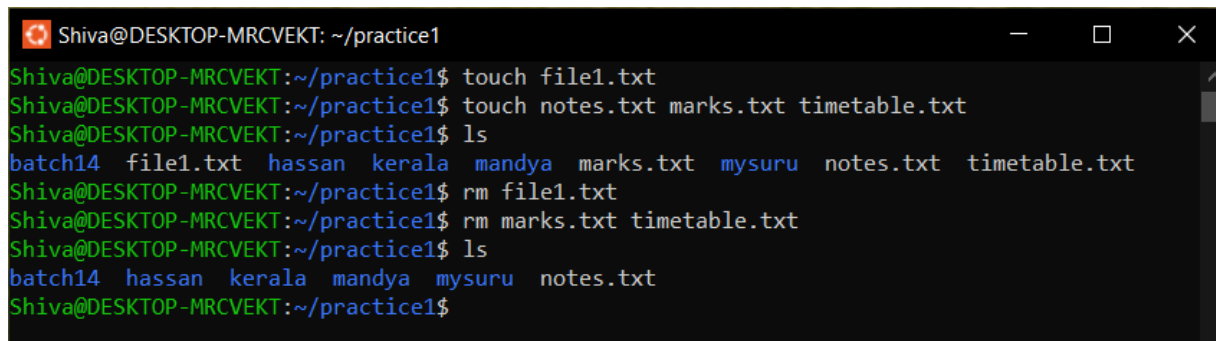A screenshot of a terminal window titled 'Shiva@DESKTOP-MRCVEKT: ~/practice1'. The terminal shows a series of commands and their outputs. The user first runs 'touch file1.txt', then 'touch notes.txt marks.txt timetable.txt'. A subsequent 'ls' command shows a list of files: 'file1.txt hassan kerala mandya marks.txt mysuru notes.txt timetable.txt'. The user then runs 'rm file1.txt' and 'rm marks.txt timetable.txt'. A final 'ls' command shows the remaining files: 'hassan kerala mandya mysuru notes.txt'.

```
Shiva@DESKTOP-MRCVEKT: ~/practice1
Shiva@DESKTOP-MRCVEKT:~/practice1$ touch file1.txt
Shiva@DESKTOP-MRCVEKT:~/practice1$ touch notes.txt marks.txt timetable.txt
Shiva@DESKTOP-MRCVEKT:~/practice1$ ls
batch14  file1.txt  hassan  kerala  mandya  marks.txt  mysuru  notes.txt  timetable.txt
Shiva@DESKTOP-MRCVEKT:~/practice1$ rm file1.txt
Shiva@DESKTOP-MRCVEKT:~/practice1$ rm marks.txt timetable.txt
Shiva@DESKTOP-MRCVEKT:~/practice1$ ls
batch14  hassan  kerala  mandya  mysuru  notes.txt
Shiva@DESKTOP-MRCVEKT:~/practice1$
```


Screenshot 2: touch to make files and rm to delete them.

touch makes an empty file. I made one file first and then 3 files in one command. ls showed all of them in white colour, because they are files and not folders.

rm file1.txt deleted one file, and rm marks.txt timetable.txt deleted two files together. After that only notes.txt was left. rm did not ask me anything before deleting, so I have to be careful with it.

cd - moving between folders

```
cd batch14  
pwd  
cd students  
pwd  
cd ..  
pwd  
cd students  
cd ../..  
pwd
```

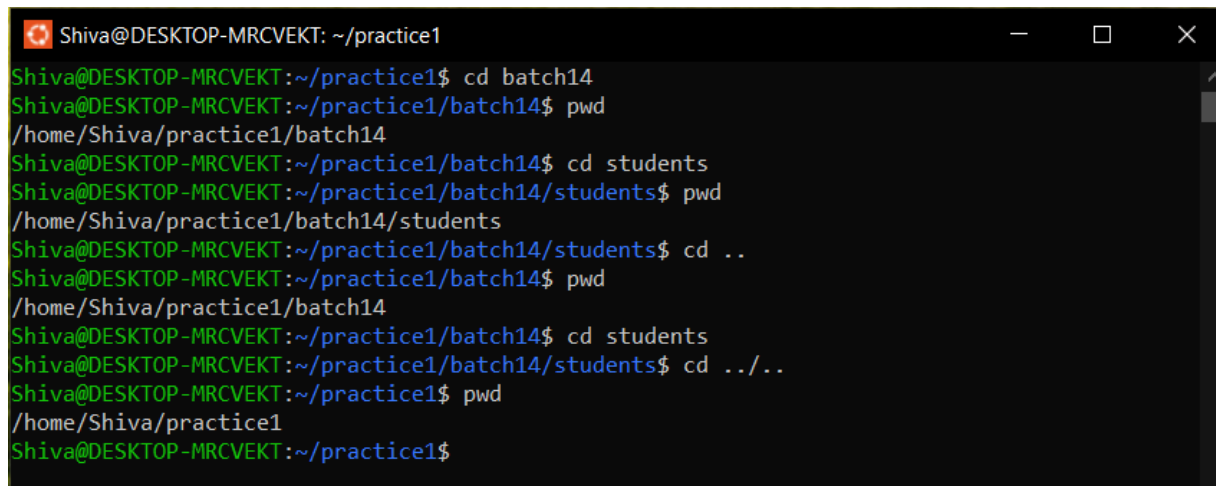

```
Shiva@DESKTOP-MRCVEKT: ~/practice1  
Shiva@DESKTOP-MRCVEKT:~/practice1$ cd batch14  
Shiva@DESKTOP-MRCVEKT:~/practice1/batch14$ pwd  
/home/Shiva/practice1/batch14  
Shiva@DESKTOP-MRCVEKT:~/practice1/batch14$ cd students  
Shiva@DESKTOP-MRCVEKT:~/practice1/batch14/students$ pwd  
/home/Shiva/practice1/batch14/students  
Shiva@DESKTOP-MRCVEKT:~/practice1/batch14/students$ cd ..  
Shiva@DESKTOP-MRCVEKT:~/practice1/batch14$ pwd  
/home/Shiva/practice1/batch14  
Shiva@DESKTOP-MRCVEKT:~/practice1/batch14$ cd students  
Shiva@DESKTOP-MRCVEKT:~/practice1/batch14/students$ cd ../..  
Shiva@DESKTOP-MRCVEKT:~/practice1$ pwd  
/home/Shiva/practice1  
Shiva@DESKTOP-MRCVEKT:~/practice1$
```

Screenshot 3: going inside folders and coming back with cd .. and cd ../..

cd batch14 took me inside batch14, and the prompt also changed to ~/practice1/batch14. Then cd students took me one more level inside.

cd .. took me back one folder, to batch14. Then I went inside students again and used cd ../.. and it took me back two folders at once, directly to practice1. pwd every time helped me to check where I am.

rmkdir, rm -r and tree


```
rmkdir mandya
```

```
ls
```

```
rmkdir kerala
```

```
rm -r kerala
```

```
tree
```

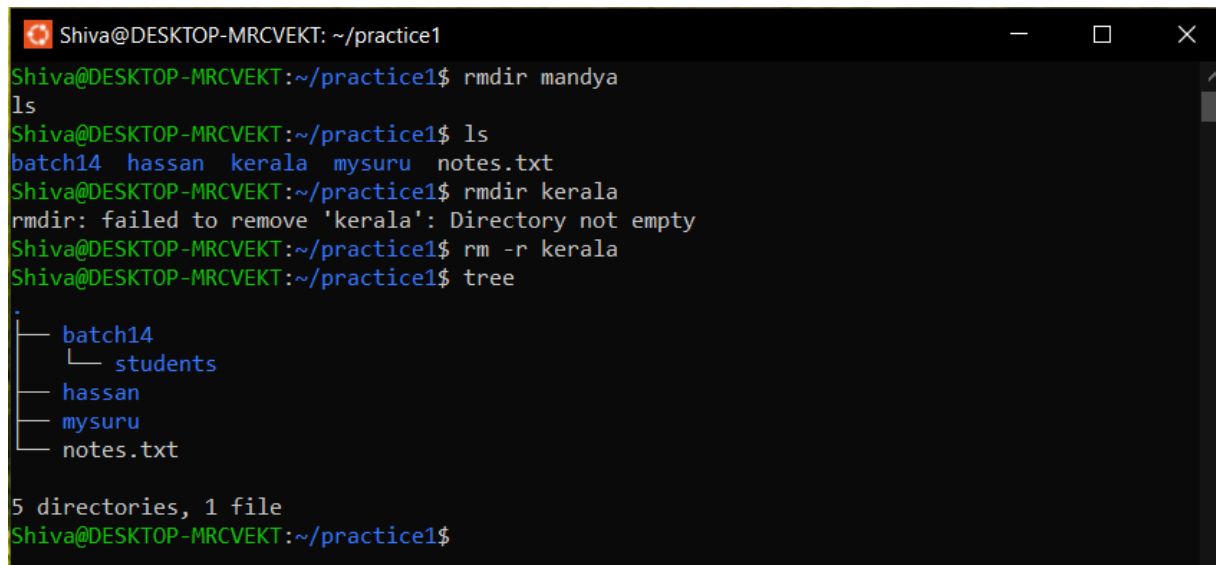

```
Shiva@DESKTOP-MRCVEKT: ~/practice1
Shiva@DESKTOP-MRCVEKT:~/practice1$ rmkdir mandya
ls
Shiva@DESKTOP-MRCVEKT:~/practice1$ ls
batch14  hassan  kerala  mysuru  notes.txt
Shiva@DESKTOP-MRCVEKT:~/practice1$ rmkdir kerala
rmkdir: failed to remove 'kerala': Directory not empty
Shiva@DESKTOP-MRCVEKT:~/practice1$ rm -r kerala
Shiva@DESKTOP-MRCVEKT:~/practice1$ tree
.
├── batch14
│   └── students
├── hassan
├── mysuru
└── notes.txt

5 directories, 1 file
Shiva@DESKTOP-MRCVEKT:~/practice1$
```

Screenshot 4: rmkdir for an empty folder, rm -r for a folder with things inside.


rmkdir mandya worked because mandya was empty. (The small ls under it in the screenshot is just because I typed the next command very fast.)

But rmkdir kerala gave an error: Directory not empty, because kochi is inside kerala. rmkdir can only delete empty folders. rm -r kerala deleted kerala along with kochi inside it. -r means recursive, it goes inside and deletes everything. tree shows kerala and mandya are gone now.

I also used clear many times during this practice. It just cleans the terminal screen. The files are not touched, only the screen becomes empty.

man - the manual page

man mkdir

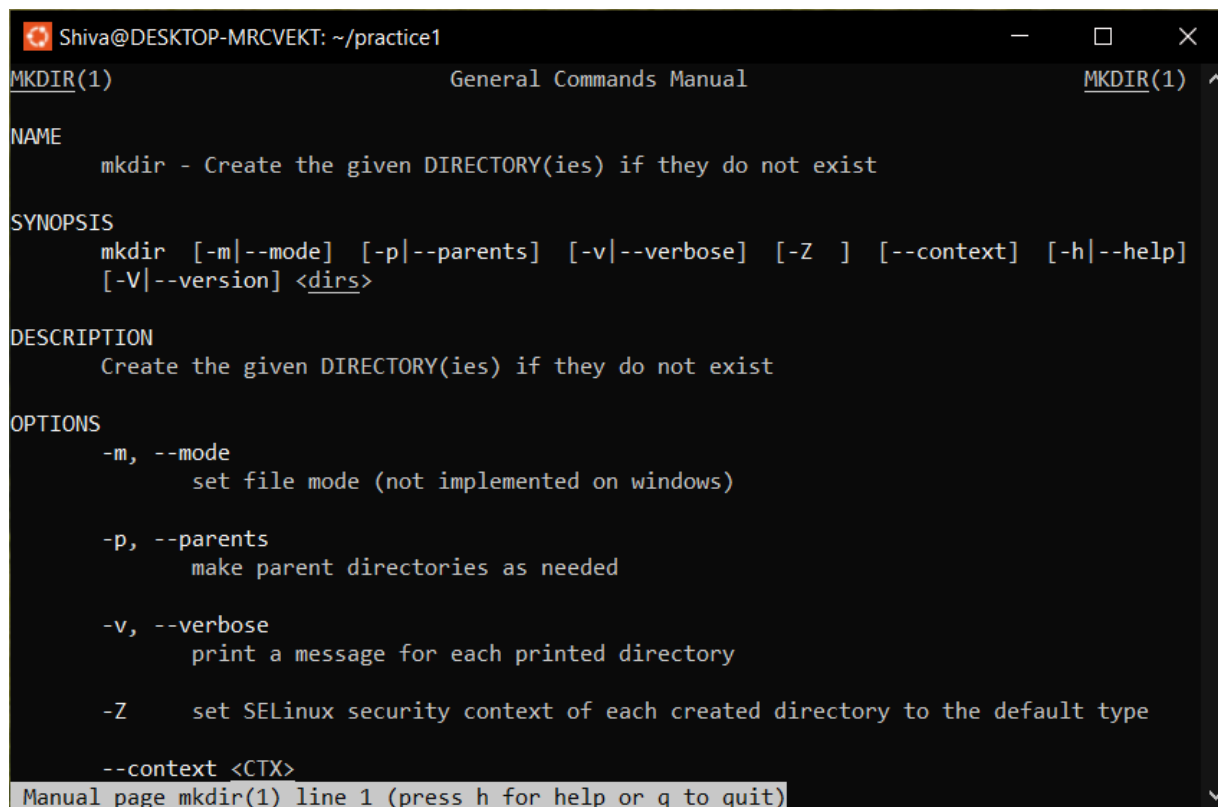

```
Shiva@DESKTOP-MRCVEKT: ~/practice1
MKDIR(1)                                General Commands Manual    MKDIR(1)

NAME
    mkdir - Create the given DIRECTORY(ies) if they do not exist

SYNOPSIS
    mkdir [-m|--mode] [-p|--parents] [-v|--verbose] [-Z ] [--context] [-h|--help]
    [-V|--version] <dirs>

DESCRIPTION
    Create the given DIRECTORY(ies) if they do not exist

OPTIONS
    -m, --mode
        set file mode (not implemented on windows)

    -p, --parents
        make parent directories as needed

    -v, --verbose
        print a message for each printed directory

    -Z      set SELinux security context of each created directory to the default type

    --context <CTX>

Manual page mkdir(1) line 1 (press h for help or q to quit)
```

Screenshot 5: the manual page of mkdir.

man mkdir opened the full manual of mkdir. It shows the name, the syntax and all the options. I can see the -p option here also: make parent directories as needed. That is the same thing I used above. To come out of the manual I pressed q.