


Spring Core and Maven

Exercise 1: Configuring a Basic Spring Application AND


Exercise 2: Implementing Dependency Injection

CODE and OUTPUT:

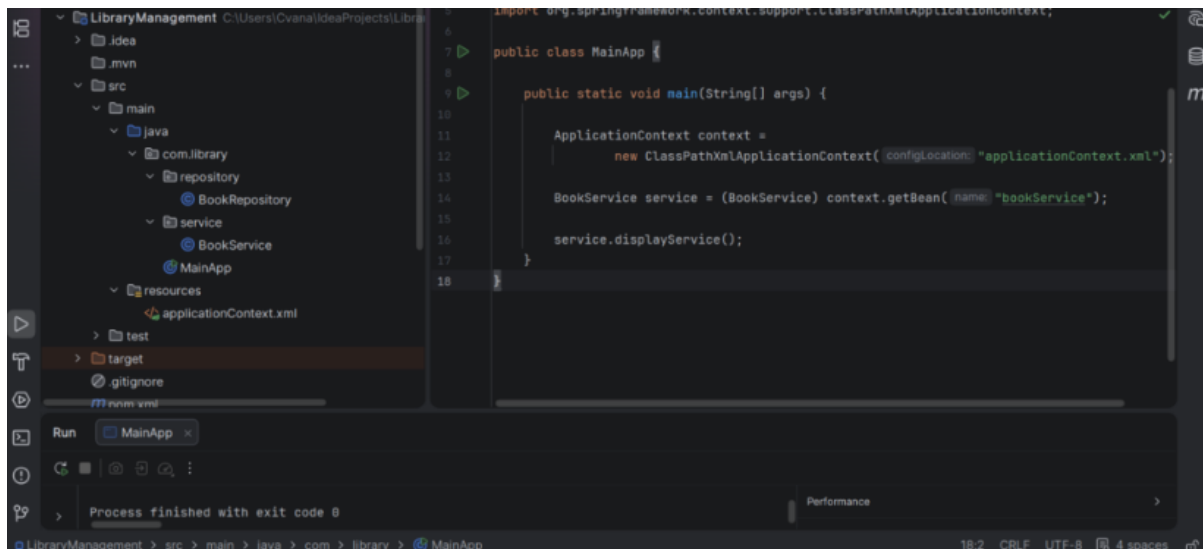

The screenshot shows an IDE with the following components:

- Project Structure (Left):** A tree view showing the project 'LibraryManagement' with subdirectories: 'src' (containing 'main' and 'test'), 'resources' (containing 'applicationContext.xml'), and 'target'. The 'main' directory contains 'com' (containing 'library' which has 'repository', 'service', and 'MainApp').
- Code Editor (Center):** Displays the code for 'MainApp.java'. It includes an import for 'org.springframework.context.support.ClassPathXmlApplicationContext' and a 'main' method that creates a 'ClassPathXmlApplicationContext' with 'applicationContext.xml', retrieves a 'BookService' bean, and calls 'displayService()'.
- Run Console (Bottom):** Shows the message 'Process finished with exit code 0'.

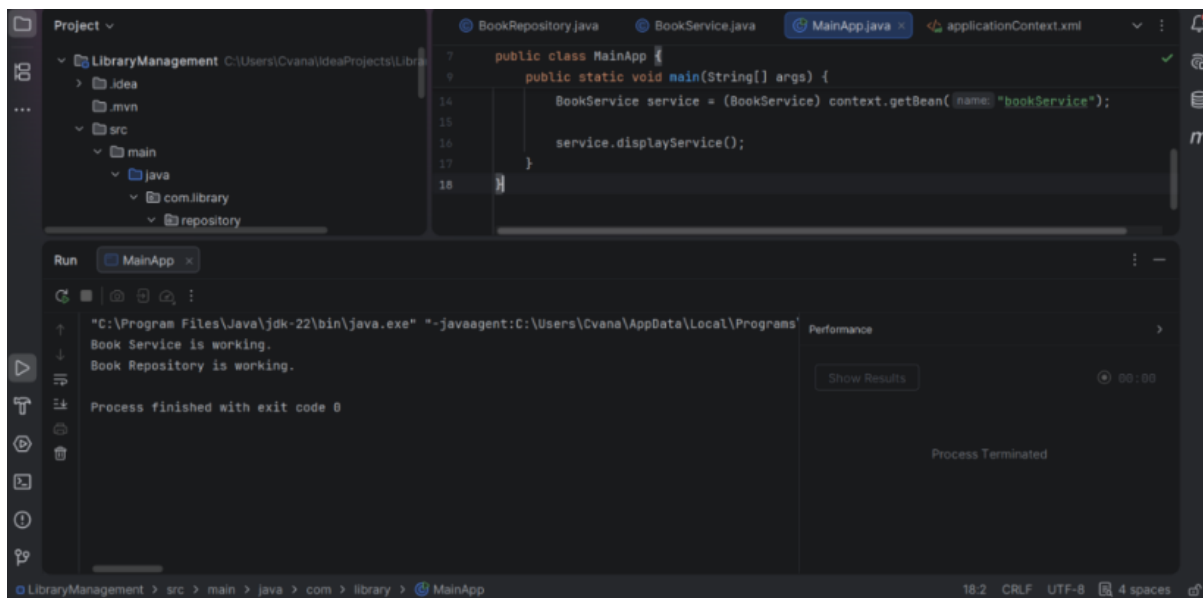

The screenshot shows the same IDE with the following components:

- Project Structure (Left):** Similar to the first screenshot, but with additional files 'BookRepository.java' and 'BookService.java' visible in the 'repository' and 'service' subdirectories respectively.
- Code Editor (Center):** Displays the same 'MainApp.java' code as the first screenshot.
- Run Console (Bottom):** Shows the output of the application: 'Book Service is working.' and 'Book Repository is working.', followed by 'Process finished with exit code 0'. The console also shows the Java command used to run the application: 'C:\Program Files\Java\jdk-22\bin\java.exe' with various JVM options.
- Performance (Right):** A panel showing 'Process Terminated' and a 'Show Results' button.

CODE and OUTPUT:

