



MISS WORMWOOD, I PROTEST THIS "C" GRADE! THAT'S SAYING I ONLY DID AN "AVERAGE" JOB!



I GOT 75% OF THE ANSWERS CORRECT, AND IN TODAY'S SOCIETY, DOING SOMETHING 75% RIGHT IS OUTSTANDING! IF GOVERNMENT AND INDUSTRY WERE 75% COMPETENT, WE'D BE ECSTATIC!



I WON'T STAND FOR THIS ARTIFICIAL STANDARD OF PERFORMANCE! I DEMAND AN "A" FOR THIS KIND OF WORK!



I THINK IT'S REALLY GROSS HOW SHE DRINKS MAALOX STRAIGHT FROM THE BOTTLE.



© 1985 Watterson/Distributed by Universal Press Syndicate

Tools

2022 → GPT-3.5 (Just text)

2026 → GPT-5.5 → text
Image
Audio
Video
→ Web Search
→ Shopping
→ Book flight tickets
└──────────────────
Act on your behalf

web-search (n) n → "Trump"

LLM ← Respo → Query

you've a mathematical function `add(a, b)`; where `a` and `b` are arguments. If ever a user wants to add 2 numbers, call this function.

e.g.

user: Add 3, 3

Assistant: `add(3, 3)`

got it?

Yes, I got it! I understand the function `add(a, b)` and the user wants to call it with two numbers.

I'm ready for your inputs. 😊




can you add 5 and 20 for me?

`add(5, 20)`



"No of r in strawberries?"

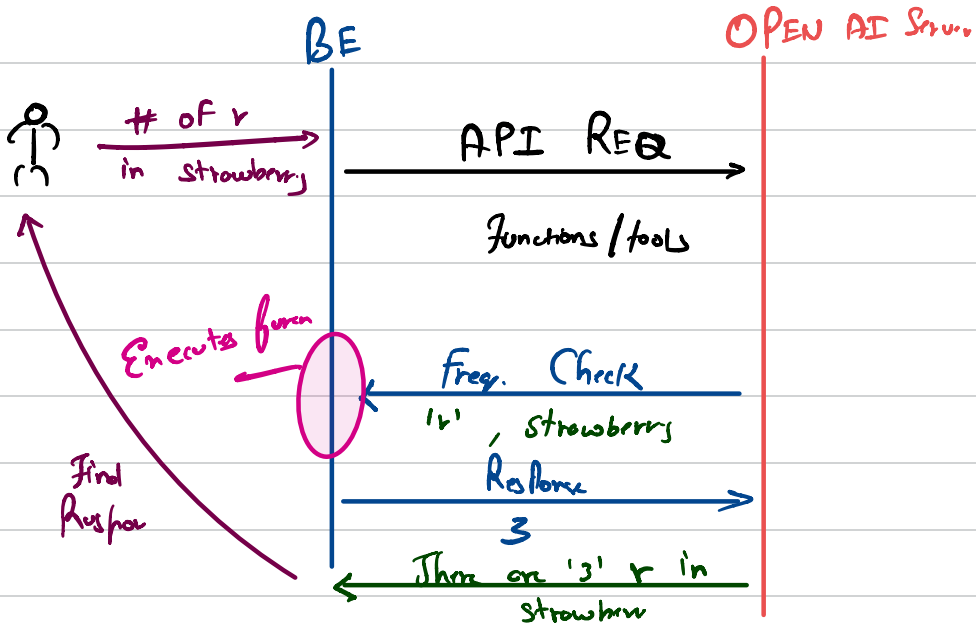

$$(3 \times 4) + (8 \times 6)$$

Add
mul

BE

mul - 3, 4
mul - 8, 6

LLM

12
48 → LLM

BE


Add - 12, 48

60 → LLM



Iran (USA) → BE → LLM

BE



→ LLM



$$10 + 4 + 3 + 2$$

$$(3 * 4) + (2 * 3)$$