

[Accelerate Your Success] Join 10,000+ Professionals on the Roadmap to Data Science Excellence!

[Download Roadmap](#)

X

[Home](#)

guest blog – Published On March 17, 2017 and Last Modified On January 6th, 2021

[Classification](#) [Intermediate](#) [Machine Learning](#) [R](#) [Structured Data](#) [Supervised](#) [Technique](#) [Telecom](#)

Introduction

If you have spent some time in machine learning and data science, you would have definitely come across imbalanced class distribution. This is a scenario where the number of observations belonging to one class is significantly lower than those belonging to the other classes.

This problem is predominant in scenarios where anomaly detection is crucial like electricity pilferage, fraudulent transactions in banks, identification of rare diseases, etc. In this situation, the predictive model developed using conventional machine learning algorithms could be biased and inaccurate.

This happens because Machine Learning Algorithms are usually designed to improve accuracy by reducing the error. Thus, they do not take into account the class distribution / proportion or balance of classes.

This guide describes various approaches for solving such class imbalance problems using various sampling techniques. We also weigh each technique for its pros and cons. Finally, I reveal an approach using which you can create a balanced class distribution and apply ensemble learning technique designed especially for this purpose.

Table of Content

1. Challenges faced with Imbalanced datasets
2. Approach to handling Imbalanced Datasets
3. Illustrative Example
4. Conclusion



1. Challenges faced with imbalanced data

One of the main challenges faced by the utility industry today is electricity theft. Electricity theft is the third largest form of theft worldwide. Utility companies are increasingly turning towards advanced analytics and machine learning algorithms to identify consumption patterns that indicate theft.

Imbalanced Data : How to handle Imbalanced Classification Problems

significantly lower than normal healthy transactions i.e. accounting it to around 1-2 % of the total number of observations. The ask is to improve identification of the rare minority class as opposed to achieving higher overall accuracy.

Machine Learning algorithms tend to produce unsatisfactory classifiers when faced with imbalanced datasets. For any imbalanced data set, if the event to be predicted belongs to the minority class and the event rate is less than 5%, it is usually referred to as a rare event.

Example of imbalanced data

Let's understand this with the help of an example.

Ex: In an utilities fraud detection data set you have the following data:

Total Observations = 1000

Fraudulent Observations = 20

Non Fraudulent Observations = 980

Event Rate= 2 %

The main question faced during data analysis is – How to get a balanced dataset by getting a decent number of samples for these anomalies given the rare occurrence for some them?

Challenges with standard Machine learning techniques

The conventional model evaluation methods do not accurately measure model performance when faced with imbalanced datasets.

Standard classifier algorithms like Decision Tree and Logistic Regression have a bias towards classes which have number of instances. They tend to only predict the majority class data. The features of the minority class are treated as noise and are often ignored. Thus, there is a high probability of misclassification of the minority class as compared to the majority class.

Evaluation of a classification algorithm performance is measured by the Confusion Matrix which contains information about the actual and the predicted class.

Actual	Predicted	
	Positive Class	Negative Class
Positive Class	True Positive(TP)	False Negative (FN)
Negative Class	False Positive (FP)	True Negative (TN)

$$\text{Accuracy of a model} = (\text{TP}+\text{TN}) / (\text{TP}+\text{FN}+\text{FP}+\text{TN})$$

However, while working in an imbalanced domain accuracy is not an appropriate measure to evaluate model performance. For eg: A classifier which achieves an accuracy of 98 % with an event rate of 2 % is not accurate, if it classifies all instances as the majority class. And eliminates the 2 % minority class observations as noise.

Examples of imbalanced data

Thus, to sum it up, while trying to resolve specific business challenges with imbalanced data sets, the classifiers produced by standard machine learning algorithms might not give accurate results. Apart from fraudulent transactions, other examples of a

We use cookies on Analytics Vidhya websites to deliver our services, analyze web traffic, and improve your experience on the site. By using Analytics Vidhya, you

agree to our [Privacy Policy](#) and [Terms of Use](#).

Imbalanced Data : How to handle Imbalanced Classification Problems

Telecommunication companies where Churn Rate is lower than 2 %.

- Data sets to identify rare diseases in medical diagnostics etc.
- Natural Disaster like Earthquakes

Dataset used

In this article, we will illustrate the various techniques to train a model to perform well against highly imbalanced datasets. And accurately predict rare events using the following fraud detection dataset:

Total Observations = 1000

Fraudulent Observations = 20

Non-Fraudulent Observations = 980

Event Rate= 2 %

Fraud Indicator = 0 for Non-Fraud Instances

Fraud Indicator = 1 for Fraud

2. Approach to handling Imbalanced Data

2.1 Data Level approach: Resampling Techniques

Dealing with imbalanced datasets entails strategies such as improving classification algorithms or balancing classes in the training data (data preprocessing) before providing the data as input to the machine learning algorithm. The later technique is preferred as it has wider application.

The main objective of balancing classes is to either increasing the frequency of the minority class or decreasing the frequency of the majority class. This is done in order to obtain approximately the same number of instances for both the classes. Let us look at a few resampling techniques:

2.1.1 Random Under-Sampling

Random Undersampling aims to balance class distribution by randomly eliminating majority class examples. This is done until the majority and minority class instances are balanced out.

Total Observations = 1000

Fraudulent Observations = 20

Non Fraudulent Observations = 980

Event Rate= 2 %

In this case we are taking 10 % samples without replacement from Non Fraud instances. And combining them with Fraud instances.

Non Fraudulent Observations after random under sampling = 10 % of 980 = 98

Imbalanced Data : How to handle Imbalanced Classification Problems

- **Advantages**

- It can help improve run time and storage problems by reducing the number of training data samples when the training data set is huge.

- **Disadvantages**

- It can discard potentially useful information which could be important for building rule classifiers.
- The sample chosen by random under sampling may be a biased sample. And it will not be an accurate representative of the population. Thereby, resulting in inaccurate results with the actual test data set.

2.1.2 Random Over-Sampling

Over-Sampling increases the number of instances in the minority class by randomly replicating them in order to present a higher representation of the minority class in the sample.

Total Observations = 1000

Fraudulent Observations = 20

Non Fraudulent Observations = 980

Event Rate= 2 %

In this case we are replicating 20 fraud observations 20 times.

Non Fraudulent Observations = 980

Fraudulent Observations after replicating the minority class observations= 400

Total Observations in the new data set after oversampling=1380

Event Rate for the new data set after under sampling= $400/1380 = 29\%$

- **Advantages**

- Unlike under sampling this method leads to no information loss.
- Outperforms under sampling

- **Disadvantages**

- It increases the likelihood of overfitting since it replicates the minority class events.

2.1.3 Cluster-Based Over Sampling

In this case, the K-means clustering algorithm is independently applied to minority and majority class instances. This is to identify clusters in the dataset. Subsequently, each cluster is oversampled such that all clusters of the same class have an equal number of instances and all classes have the same size.

Total Observations = 1000

Fraudulent Observations = 20

Imbalanced Data : How to handle Imbalanced Classification Problems

- **Majority Class Clusters**
 1. Cluster 1: 150 Observations
 2. Cluster 2: 120 Observations
 3. Cluster 3: 230 observations
 4. Cluster 4: 200 observations
 5. Cluster 5: 150 observations
 6. Cluster 6: 130 observations
- **Minority Class Clusters**
 1. Cluster 1: 8 Observations
 2. Cluster 2: 12 Observations

After oversampling of each cluster, all clusters of the same class contain the same number of observations.

- **Majority Class Clusters**
 1. Cluster 1: 170 Observations
 2. Cluster 2: 170 Observations
 3. Cluster 3: 170 observations
 4. Cluster 4: 170 observations
 5. Cluster 5: 170 observations
 6. Cluster 6: 170 observations
- **Minority Class Clusters**
 1. Cluster 1: 250 Observations
 2. Cluster 2: 250 Observations

Event Rate post cluster based oversampling sampling = $500 / (1020 + 500) = 33\%$

- **Advantages**
 - This clustering technique helps overcome the challenge between class imbalance. Where the number of examples representing positive class differs from the number of examples representing a negative class.
 - Also, overcome challenges within class imbalance, where a class is composed of different sub clusters. And each sub cluster does not contain the same number of examples.
- **Disadvantages**
 - The main drawback of this algorithm, like most oversampling techniques is the possibility of over-fitting the training data.

2.1.4 Informed Over Sampling: Synthetic Minority Over-sampling Technique for imbalanced data

This technique is followed to avoid overfitting which occurs when exact replicas of minority instances are added to the main dataset. A subset of data is taken from the minority class as an example and then new synthetic similar instances are created. These synthetic instances are then added to the original dataset. The new dataset is used as a sample to train the classification models.

Total Observations = 1000

Imbalanced Data : How to handle Imbalanced Classification Problems

Event Rate = 2 %

A sample of 15 instances is taken from the minority class and similar synthetic instances are generated 20 times

Post generation of synthetic instances, the following data set is created

Minority Class (Fraudulent Observations) = 300

Majority Class (Non-Fraudulent Observations) = 980


Event rate= $300/1280 = 23.4\%$

- **Advantages**

- Mitigates the problem of overfitting caused by random oversampling as synthetic examples are generated rather than replication of instances
- No loss of useful information

- **Disadvantages**

- While generating synthetic examples SMOTE does not take into consideration neighboring examples from other classes. This can result in increase in overlapping of classes and can introduce additional noise
- SMOTE is not very effective for high dimensional data

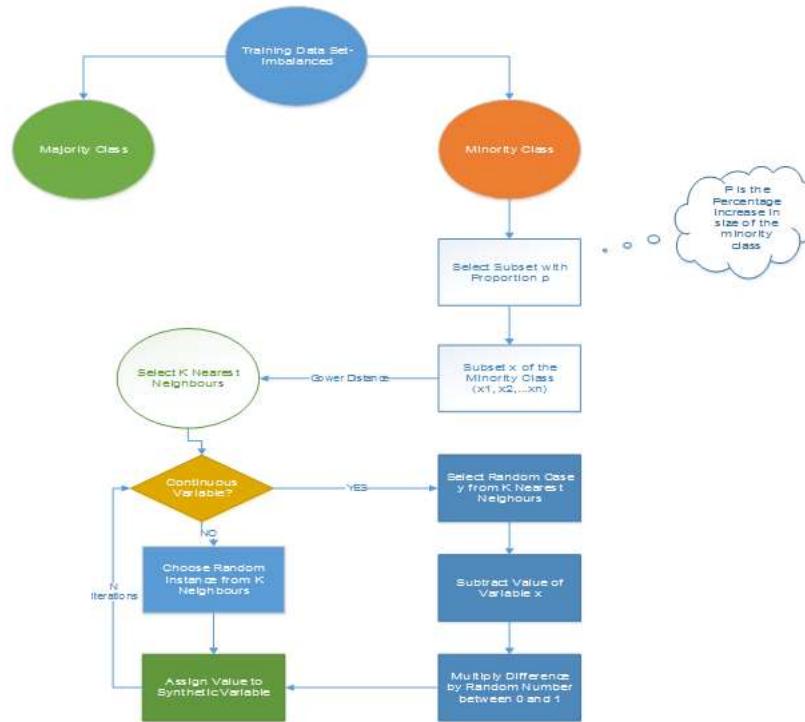

**N is the number of attributes

Figure 1: Synthetic Minority Oversampling Algorithm

Imbalanced Data : How to handle Imbalanced Classification Problems

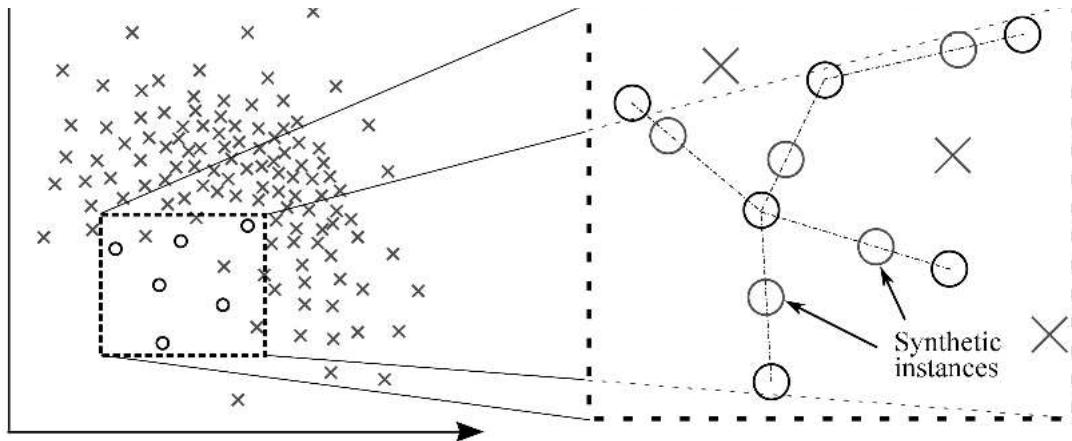


Figure 2: Generation of Synthetic Instances with the help of SMOTE

2.1.5 Modified synthetic minority oversampling technique (MSMOTE) for imbalanced data

It is a modified version of SMOTE. SMOTE does not consider the underlying distribution of the minority class and latent noises in the dataset. To improve the performance of SMOTE a modified method MSMOTE is used.

This algorithm classifies the samples of minority classes into 3 distinct groups – Security/Safe samples, Border samples, and latent noise samples. This is done by calculating the distances among samples of the minority class and samples of the training data.

Security samples are those data points which can improve the performance of a classifier. While on the other hand, noise are the data points which can reduce the performance of the classifier. The ones which are difficult to categorize into any of the two are classified as border samples.

While the basic flow of MSOMTE is the same as that of SMOTE (discussed in the previous section). In MSMOTE the strategy of selecting nearest neighbors is different from SMOTE. The algorithm randomly selects a data point from the k nearest neighbors for the security sample, selects the nearest neighbor from the border samples and does nothing for latent noise.

2.2 Algorithmic Ensemble Techniques

The above section, deals with handling imbalanced data by resampling original data to provide balanced classes. In this section, we are going to look at an alternate approach i.e. Modifying existing classification algorithms to make them appropriate for imbalanced data sets.

Imbalanced Data : How to handle Imbalanced Classification Problems

constructing several two stage classifiers from the original data and then aggregate their predictions.

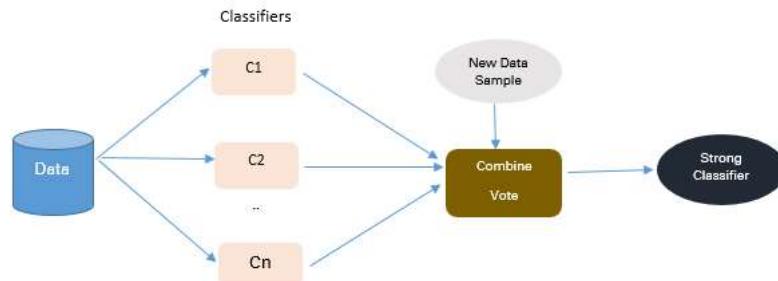


Figure 3: Approach to Ensemble based Methodologies

2.2.1. Bagging Based techniques for imbalanced data

Bagging is an abbreviation of Bootstrap Aggregating. The conventional bagging algorithm involves generating 'n' different bootstrap training samples with replacement. And training the algorithm on each bootstrapped algorithm separately and then aggregating the predictions at the end.

Bagging is used for reducing Overfitting in order to create strong learners for generating accurate predictions. Unlike boosting, bagging allows replacement in the bootstrapped sample.

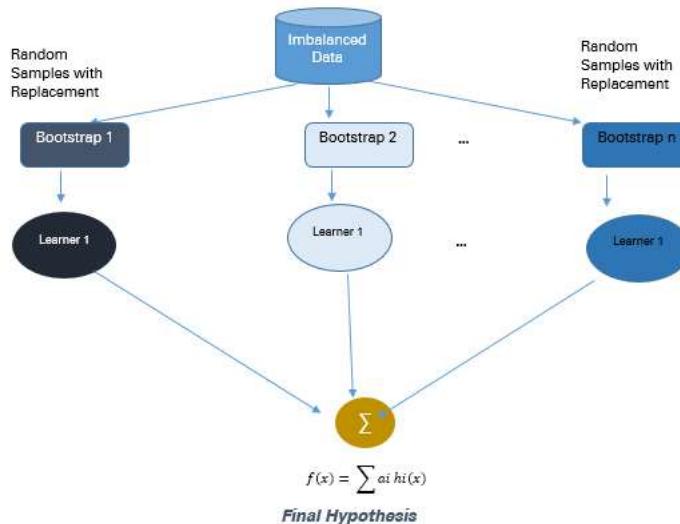


Figure 4: Approach to Bagging Methodology

Total Observations = 1000

Fraudulent Observations = 20

Non Fraudulent Observations = 980

Event Rate= 2 %

Imbalanced Data : How to handle Imbalanced Classification Problems

of 200 observations. And the Classifiers $c_1, c_2 \dots c_{10}$ are aggregated to produce a compound classifier. This ensemble methodology produces a stronger compound classifier since it combines the results of individual classifiers to come up with an improved one.

- Advantages

- Improves stability & accuracy of machine learning algorithms
- Reduces variance
- Overcomes overfitting
- Improved misclassification rate of the bagged classifier
- In noisy data environments bagging outperforms boosting

- Disadvantages

- Bagging works only if the base classifiers are not bad to begin with. Bagging bad classifiers can further degrade performance


2.2.2. Boosting-Based techniques for imbalanced data

Boosting is an ensemble technique to combine weak learners to create a strong learner that can make accurate predictions. Boosting starts out with a base classifier / weak classifier that is prepared on the training data.

What are base learners / weak classifiers?

The base learners / Classifiers are weak learners i.e. the prediction accuracy is only slightly better than average. A classifier learning algorithm is said to be weak when small changes in data induce big changes in the classification model.

In the next iteration, the new classifier focuses on or places more weight to those cases which were incorrectly classified in the last round.

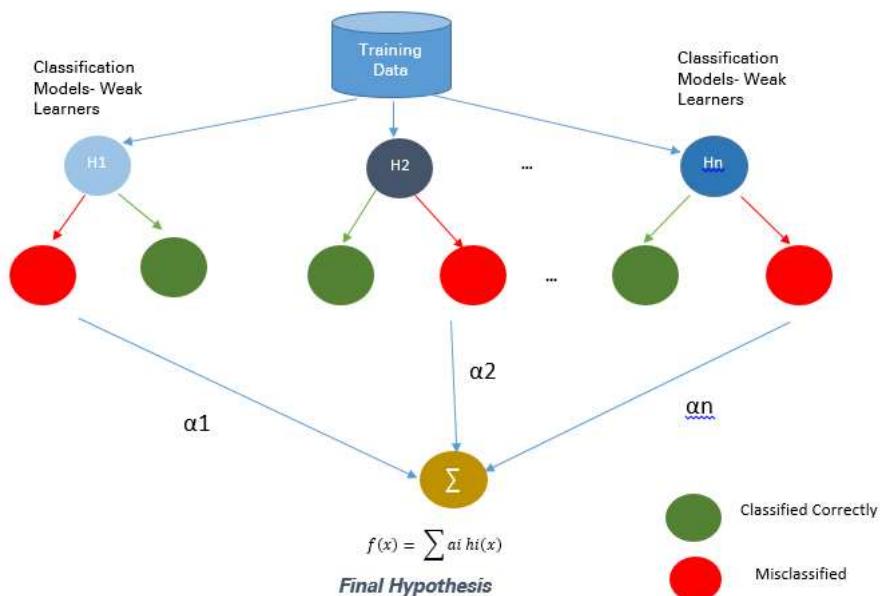

Imbalanced Data : How to handle Imbalanced Classification Problems

2.2.2.1. Adaptive Boosting- Ada Boost techniques for imbalanced data

Ada Boost is the first original boosting technique which creates a highly accurate prediction rule by combining many weak and inaccurate rules. Each classifier is serially trained with the goal of correctly classifying examples in every round that were incorrectly classified in the previous round.

For a learned classifier to make strong predictions it should follow the following three conditions:

- The rules should be simple
- Classifier should have been trained on sufficient number of training examples
- The Classifier should have low training error for the training instances

Each of the weak hypothesis has an accuracy slightly better than random guessing i.e. Error Term $\epsilon(t)$ should be slightly more than $\frac{1}{2} - \beta$ where $\beta > 0$. This is the fundamental assumption of this boosting algorithm which can produce a final hypothesis with a small error

After each round, it gives more focus to examples that are harder to classify. The quantity of focus is measured by a weight, which initially is equal for all instances. After each iteration, the weights of misclassified instances are increased and the weights of correctly classified instances are decreased.

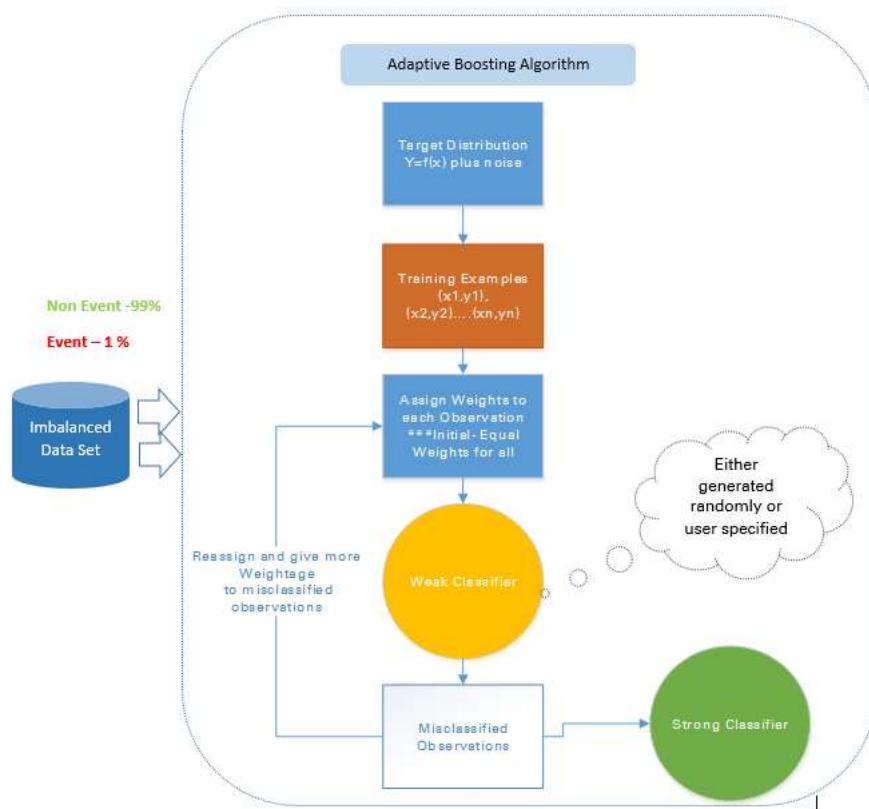


Figure 6: Approach to Adaptive Boosting

For example in a data set containing 1000 observations out of which 20 are labelled fraudulent. Equal weights W_1 are assigned to all observations and the base classifier accurately classifies 400 observations.

Imbalanced Data : How to handle Imbalanced Classification Problems

observations is reduced to w3.

In each iteration, these updated weighted observations are fed to the weak classifier to improve its performance. This process continues till the misclassification rate significantly decreases thereby resulting in a strong classifier.

- **Advantages**

1. Very Simple to implement
2. Good generalization- suited for any kind of classification problem ü Not prone to overfitting

- **Disadvantages**

1. Sensitive to noisy data and outliers

2.2.2.2 Gradient Tree Boosting techniques for imbalanced data

In Gradient Boosting many models are trained sequentially. It is a numerical optimization algorithm where each model minimizes the loss function, $y = ax+b+e$, using the Gradient Descent Method.

Decision Trees are used as weak learners in Gradient Boosting.

While both Adaboost and Gradient Boosting work on weak learners / classifiers. And try to boost them into a strong learner, there are some fundamental differences in the two methodologies. Adaboost either requires the users to specify a set of weak learners or randomly generates the weak learners before the actual learning process. The weight of each learner is adjusted at every step depending on whether it predicts a sample correctly.

On the other hand, Gradient Boosting builds the first learner on the training dataset to predict the samples, calculates the loss (Difference between real value and output of the first learner). And use this loss to build an improved learner in the second stage.

At every step, the residual of the loss function is calculated using the Gradient Descent Method and the new residual becomes a target variable for the subsequent iteration.

Gradient Boosting can be done using the Gradient Boosting Node in SAS Miner and GBM package in R

Imbalanced Data : How to handle Imbalanced Classification Problems

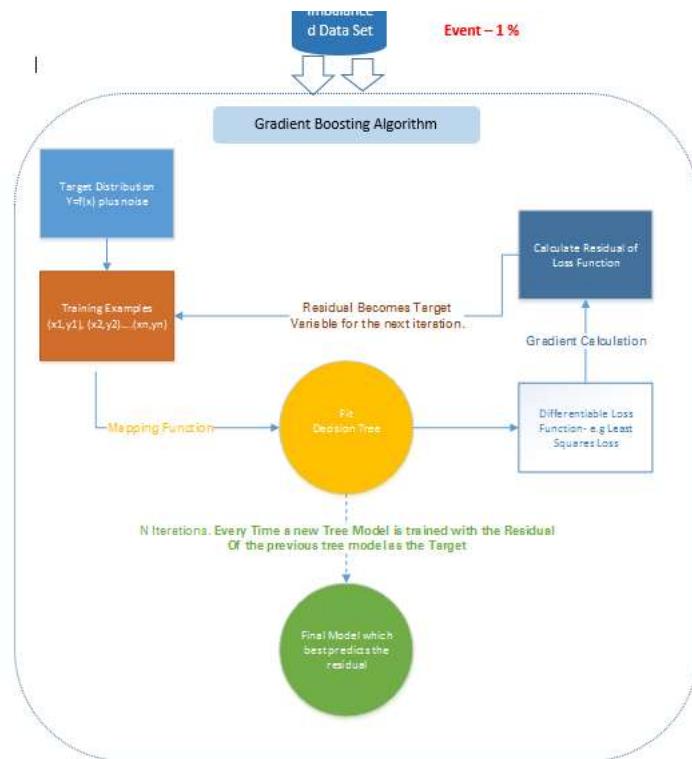


Figure 7: Approach to Gradient Boosting

For example: In a training data set containing 1000 observations out of which 20 are labelled fraudulent an initial base classifier. Target Variable Fraud =1 for fraudulent transactions and Fraud=0 for not fraud transactions.

For eg: Decision tree is fitted which accurately classifying only 5 observations as Fraudulent observations. A differentiable loss function is calculated based on the difference between the actual output and the predicted output of this step. The residual of the loss function is the target variable (F1) for the next iteration.

Similarly, this algorithm internally calculates the loss function, updates the target at every stage and comes up with an improved classifier as compared to the initial classifier.

- **Disadvantages**

- Gradient Boosted trees are harder to fit than random forests
- Gradient Boosting Algorithms generally have 3 parameters which can be fine-tuned, Shrinkage parameter, depth of the tree, the number of trees. Proper training of each of these parameters is needed for a good fit. If parameters are not tuned correctly it may result in over-fitting.

2.2.2.3 XG Boost techniques for imbalanced data

XGBoost (Extreme Gradient Boosting) is an advanced and more efficient implementation of Gradient Boosting Algorithm discussed in the previous section.

Advantages over Other Boosting Techniques

Imbalanced Data : How to handle Imbalanced Classification Problems

maximum depth specified and prunes the tree backward and removes splits beyond which there is an only negative loss.

Extreme gradient boosting can be done using the XGBoost package in R and Python

3. Illustrative Example on dealing with imbalanced data

3.1. Data Description

The illustrative telecom churn dataset has 47241 client records with each record containing information about 27 key predictor variables.

	Frequency	Percentage
Churners	921	1.95%
Non Churners	46320	98.05 %
Total	47241	100%

The data structure of the rare event data set is shown below post missing value removal, outlier treatment and dimension reduction.

MSISDN	AON	Churn Flag	Avg_Inactive_Days	Current_Balance	Data_Days_Variance	Calling_Days_Variance	Onnet_Ratio	Roaming_User
7610120456	6-12 months	0	2.25	20	5	2	23	0
7611120467	12-18 months	1	3.7	3.85	8	5	16	1
9711120467	>18 months	1	5	10	10	7	17	0
9830022336	3-6 months	1	8	5	6	8	8	0
971324655	>18 months	1	1.3	2.25	4	12	12	0

Download the Dataset from here: [Sample Dataset](#)

3.2 Description of Methodologies

The unbalanced dataset is balanced using Synthetic Minority oversampling technique (SMOTE) which attempts to balance the data set by creating synthetic instances. And train the balanced data set using Gradient Boosting Algorithm as illustrated by the R codes in the next section

R Codes

#Load Data

```
rareevent_boost <- read.table("D:/Upasana/RareEvent/churn.txt",sep="|", header=TRUE)
dmy<-dummyVars(~.,data=rareevent_boost)
rareeventTrsf<-data.frame(predict(dmy,newdata= rareevent_boost))
set.seed(10)
sub <- sample(nrow(rareeventTrsf), floor(nrow(rareeventTrsf) * 0.9))
sub1 <- sample(nrow(rareeventTrsf), floor(nrow(rareeventTrsf) * 0.1))
training <- rareeventTrsf [sub, ]
testing <- rareeventTrsf [-sub, ]
training_sub<- rareeventTrsf [sub1, ]
tables(training_sub)
head(training_sub)
```

Imbalanced Data : How to handle Imbalanced Classification Problems

```
library(unbalanced)
data(ubIonosphere)
n<-ncol(rareevent_boost)
output<- rareevent_boost $CHURN_FLAG
output<-as.factor(output)
input<- rareevent_boost [ , -n]
View(input)
```

```
#Balance the Dataset using ubSMOTE#
data<-ubBalance(X= input, Y=output, type="ubSMOTE", percOver=300, percUnder=150, verbose=TRUE
View(data)
```

```
#Balanced Data#
balancedData<-cbind(data$X,data$Y)
View(balancedData)
table(balancedData$CHURN_FLAG)
```

```
#Write the balanced data to be used to train the model#
write.table(balancedData,"D:/ Upasana/RareEvent /balancedData.txt", sep="\t", row.names=FALSE)
```

```
#Build Boosting tree Model#
repalceNAsWithMean <- function(x) {replace(x, is.na(x), mean(x[!is.na(x)]))}
training <- repalceNAsWithMean(training)
testing <- repalceNAsWithMean(testing)
```

```
#Resampling Technique#
View(train_set)
fitcontrol<-trainControl(method="repeatedcv", number=10, repeats=1, verbose=FALSE)
gbmfit<-train(CHURN_FLAG~, data=balancedData, method="gbm", verbose=FALSE)
```

```
#Score test Data#
testing$score_Y=predict(gbmfit,newdata=testing,type="prob")[,2]
testing$score_Y=ifelse(testing$score_Y>0.5,1,0)
head(testing,n=10)
write.table(testing,"D:/ Upasana/RareEvent /testing.txt", sep="\t", row.names=FALSE)
pred_GBM<-prediction(testing$score_Y,testing$CHURN_FLAG)
```

```
#Model Performance#
model_perf_GBM <- performance(pred_GBM, "tpr", "fpr")
model_perf_GBM1 <- performance(pred_GBM, "tpr", "fpr")
model_perf_GBM
pred_GBM1<-as.data.frame(model_perf_GBM)
auc.tmp_GBM <- performance(pred_GBM,"auc")
AUC_GBM <- as.numeric(auc.tmp_GBM@y.values)
auc.tmp_GBM
```

Results

Imbalanced Data : How to handle Imbalanced Classification Problems

impacts the accuracy of the predictive model. By increasing its lift by around 20% and precision/hit ratio by 3-4 times as compared to normal analytical modeling techniques like logistic regression and decision trees.

4. Conclusion

When faced with imbalanced data sets there is no one stop solution to improve the accuracy of the prediction model. One may need to try out multiple methods to figure out the best-suited sampling techniques for the dataset. In most cases, synthetic techniques like SMOTE and MSMOTE will outperform the conventional oversampling and undersampling methods.

For better results, one can use synthetic sampling methods like SMOTE and MSMOTE along with advanced boosting methods like Gradient boosting and XG Boost.

One of the advanced bagging techniques commonly used to counter the imbalanced dataset problem is SMOTE bagging. It follows an entirely different approach from conventional bagging to create each Bag/Bootstrap. It generates the positive instances by the SMOTE Algorithm by setting a SMOTE resampling rate in each iteration. The set of negative instances is bootstrapped in each iteration.

Depending on the characteristics of the imbalanced data set, the most effective techniques will vary. Relevant evaluation parameters should be considered during the model comparison.

While comparing multiple prediction models built through an exhaustive combination of the above-mentioned techniques Lift & Area under the ROC Curve will be instrumental in determining which model is superior to the others.

If you have any questions or doubts, feel free to drop them in the comments below.

References

1. Dmitry Pavlov, Alexey Gorodilov, Cliff Brunk "BagBoo: A Scalable Hybrid Bagging-theBoosting Model".2010
2. Fithria Siti Hanifah , Hari Wijayanto , Anang Kurnia "SMOTE Bagging Algorithm for Imbalanced Data Set in Logistic Regression Analysis". Applied Mathematical Sciences, Vol. 9, 2015
3. Lina Guzman, DIRECTV "Data sampling improvement by developing SMOTE technique in SAS" .Paper 3483-2015
4. Mikel Galar, Alberto Fernández, Edurne Barrenechea, Humberto Bustince and Francisco Herrera "A Review on Ensembles for the Class Imbalance Problem: Bagging-, Boosting-, and Hybrid-Based Approaches " .2011 IEEE

About the Author



Upasana holds a Post Graduate diploma in Management from Indian Institute of Management, Indore. She is currently working as a Consultant in the Data & Analytics Practice of KPMG. She has around 3.5 + years of work experience and has worked in multiple advanced analytics and data science engagements spanning industries like Telecom, utilities, banking , manufacturing. She has worked extensively on SAS, Data Management & Advanced Analytics, R, Tableau, Oracle and SQL.

Got expertise in Business Intelligence / Machine Learning / Big Data / Data Science? Showcase

We use cookies on Analytics Vidhya websites to deliver our services, analyze web traffic, and improve your experience on the site. By using Analytics Vidhya, you

agree to our [Privacy Policy](#) and [Terms of Use](#). [Accept](#)

Imbalanced Data : How to handle Imbalanced Classification Problems

[accuracy](#) [Gradient Boosting](#) [imbalanced classification](#) [R](#)

About the Author




[guest blog](#)

Our Top Authors



[view more](#)



Download

Analytics Vidhya App for the Latest blog/Article



[Previous Post](#)

[BI Architect- US \(8 Years Of experience\)](#)

[Next Post](#)

[Backend Developer- Gurgaon, India \(3-7 Years Of Experience\)](#)

21 thoughts on "Imbalanced Data : How to handle Imbalanced Classification Problems"



Gerard Meester says:

March 17, 2017 at 6:36 am

Thanks for this article. Very relevant for me, in the area of fraud detection. I have always less fraudulent companies compared to the rest. What is not clear to me is if sampling techniques are really necessary when using XGBoost. First you present ensemble techniques as an alternative to sampling techniques to solve the unbalanced classes problem, later on you state that even when you use algorithms like boosting, sampling can be useful. Could you comment on this?

[Reply](#)



Arun says:

March 17, 2017 at 6:42 am

Nice Article explaining re sampling !! Well written

[Reply](#)



Mahesh says:

March 17, 2017 at 7:40 am

Very Nice Article, Very Helpful..

[Reply](#)



Carlos says:

We use cookies on Analytics Vidhya websites to deliver our services, analyze web traffic, and improve your experience on the site. By using Analytics Vidhya, you

agree to our [Privacy Policy](#) and [Terms of Use](#). [Accept](#)

Imbalanced Data : How to handle Imbalanced Classification Problems

USE THE SCORES WITHOUT ANY TRANSFORMATION OR NOT.

[Reply](#)

Shaul says:

March 17, 2017 at 10:38 am

Very informative and well written, thanks!

[Reply](#)

naresh s says:

March 17, 2017 at 11:19 am

Excellent explanation. Thanks for the Article

[Reply](#)

Somnath De says:

March 17, 2017 at 12:52 pm

Very well written Upasana. Keep it up.

[Reply](#)

Saurabh Bhagvatula says:

March 17, 2017 at 1:29 pm

Awesome post. Very knowledgeable.

[Reply](#)

Upasana says:

March 17, 2017 at 2:04 pm

Thanks for your feedback Gerard. XG Boost is generally a more advanced form of Boosting and takes care of imbalanced data set by balancing it in itself - so use of sampling techniques is really not necessary. Ensemble based methods are not an alternative to sampling techniques per se - you can use them separately or combine them to get better results e.g. SMOTE+ Gradient boosting. However I would suggest you try XG boosting on the imbalanced data directly set to get better results.

[Reply](#)

Upasana says:

March 17, 2017 at 3:04 pm

Thank you for your feedback Carlos. Adjustment in score can be done if you want to keep the same cut-off for the Unbalanced data set. However, if the selection is based on the top n deciles then adjustment is not required. The setting of cut off will depend on the business use case you are trying to solve - this will vary according to the industry and the specific use case.

[Reply](#)

Tom Brander says:

March 17, 2017 at 7:12 pm

Very nicely written and comprehensive. However I wonder whether the newer enhancements to Neural Network approaches offer hope in this area without class rebalancing? Anyone have thoughts on this? It seems that the NN's often generalize well on sparse features but I'm still just getting my feet wet here..

[Reply](#)

Abhay Pandilwar says:

March 18, 2017 at 12:51 pm

Really good article Upasana. This relates to my work closely, lately I've been working on classification problems for imbalanced data sets and I tend to use the under sampling method to overcome accuracy paradox. But I face one problem in particular that when I apply the trained model on application set, the number of predictions in minority class are huge. Is there a specific way to predict minimum number of accurate records? Or do we have to rely on top n deciles all the time?

[Reply](#)

Prof Ravi Vadlamani says:

March 19, 2017 at 12:41 am

Very well written post Ms. Upasana. You pretty much covered most of the methods for unbalanced classification, where both

Imbalanced Data : How to handle Imbalanced Classification Problems

Here too, the model is trained by the majority class and tested by the minority class.

[Reply](#)

Surya1987 says:

March 19, 2017 at 4:48 am

Hi Upasana, It's a very nice article. However I just need to confirm whether this can be used when there is imbalance in categories of a categorical variable. Because I have seen if we use caret package in such imbalance scenario the model does not get trained untill I remove the categories with less frequency. How to deal with those scenarios?

[Reply](#)

Surya1987 says:

March 19, 2017 at 4:57 am

sorry I missed to mention that when there is a imbalance in categorical variable which is predictor.

[Reply](#)

kabir ali says:

March 31, 2017 at 2:53 pm

Upasana i am getting error at gbmfit<-train(CHURN_FLAG~,data=balancedData,method="gbm",verbose=FALSE) i have changed the CHURN_FLAG to Churn.Flag as it is Churn,Flag in the data frame but still it says error in Train and unused arguments (data = balancedData, method = "gbm", verbose = FALSE)

[Reply](#)

Cherry says:

April 09, 2017 at 9:21 pm

I really like this article! These days I am dealing with an imbalanced dataset with small number of data records, so I want to try MSMOTE, because when I was suing SMOTE, it didn't work well. It seems that MSMOTE is published in paper in 2009, however I didn't find it in R or Python. Is there any built in library I can use to try MSMOTE?

[Reply](#)

Tirthankar Ghosh says:

May 12, 2017 at 7:11 am

I usually combine the categories with less frequency to something like OTHERS. Idea is to keep the number of levels in a class variable not very high... less than 20 (usually).

[Reply](#)

Gigi says:

October 01, 2017 at 1:01 pm

This is a really good article . The explanation is to the point and covers the topic well .Great work!

[Reply](#)

Abhay Krishnan says:

April 12, 2018 at 4:11 pm

Imbalance data sets are always worrisome during any analysis. This article has nicely explained various approaches we can use for such situations.

[Reply](#)

Aishwarya Singh says:

April 13, 2018 at 1:13 pm

Hi Abhay, Thank you for sharing your views.

[Reply](#)

Leave a Reply

Your email address will not be published. Required fields are marked *

Imbalanced Data : How to handle Imbalanced Classification Problems

Name*

Email*

Website

Notify me of follow-up comments by email.

Notify me of new posts by email.

Submit

Top Resources



[Chatgpt-4 v/s Google Bard: A Head-to-Head Comparison](#)

Gyan Prakash Tripathi - MAY 11, 2023



[Understand Random Forest Algorithms With Examples \(Updated 2023\)](#)

Sruthi E R - JUN 17, 2021



[FreedomGPT: Personal, Bold and Uncensored Chatbot Running Locally on Your..](#)

K.sabreena - APR 08, 2023



[From Zero to Millionaire: Generate Passive Income using ChatGPT](#)

Aravindpai Pai - APR 17, 2023

Analytics Vidhya

About Us

Data Scientists

Blog

Trainings

Hiring Hackathons

Advertising

© Copyright 2013-2023 Analytics Vidhya.

[Privacy Policy](#) [Terms of Use](#) [Refund Policy](#)