



Intermediate Code Generation

- *Intermediate codes* are machine independent codes, but they are close to machine instructions.
- The given program in a source language is converted to an equivalent program in an intermediate language by the intermediate code generator.
- Retargeting is supported and design is simplified
- Machine independent optimizers can be applied
- Intermediate language can be many different languages, and the designer of the compiler decides this intermediate language.

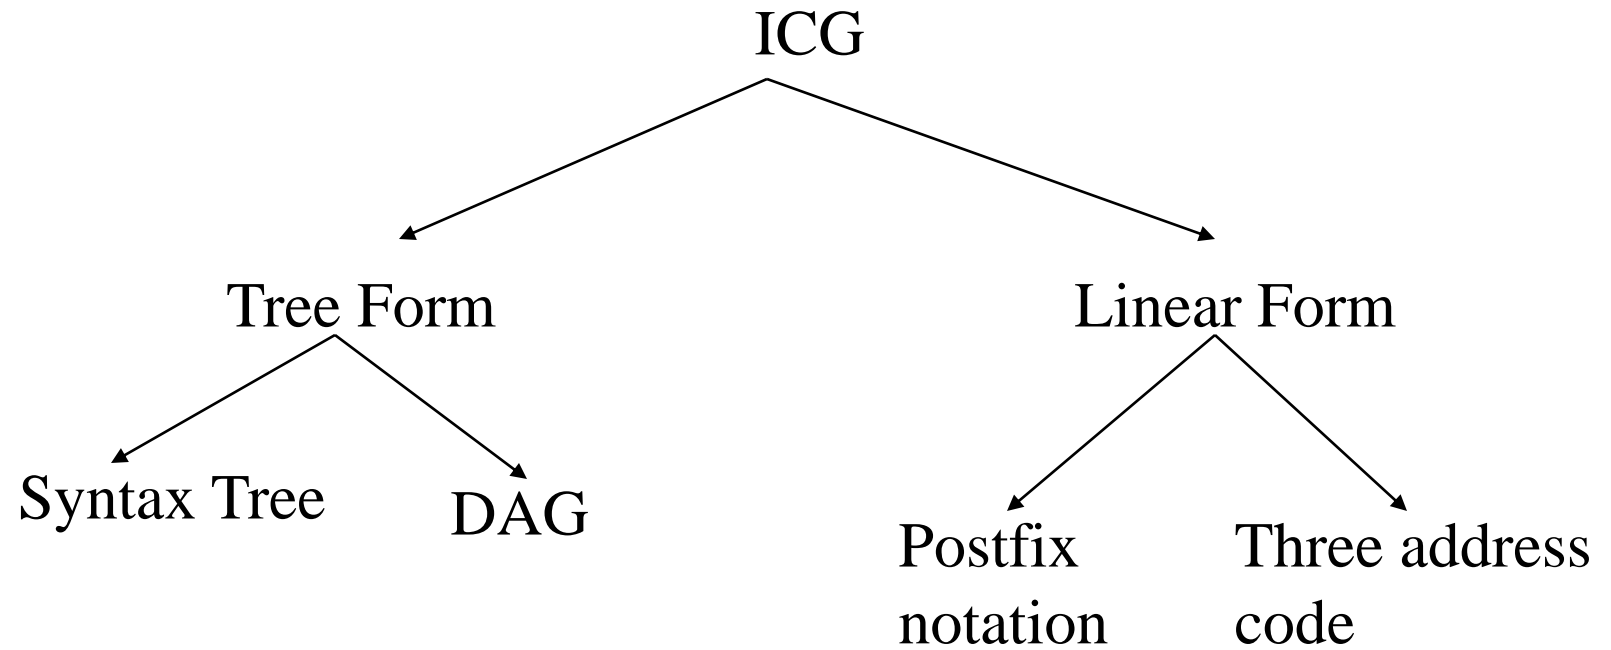


Syntax Tree and DAG

- Syntax Tree : it depicts the natural hierarchical structure of a source program
- DAG: it gives same information in compact way because common sub expressions are identified here.
- For $a := b * -c + b * -c$

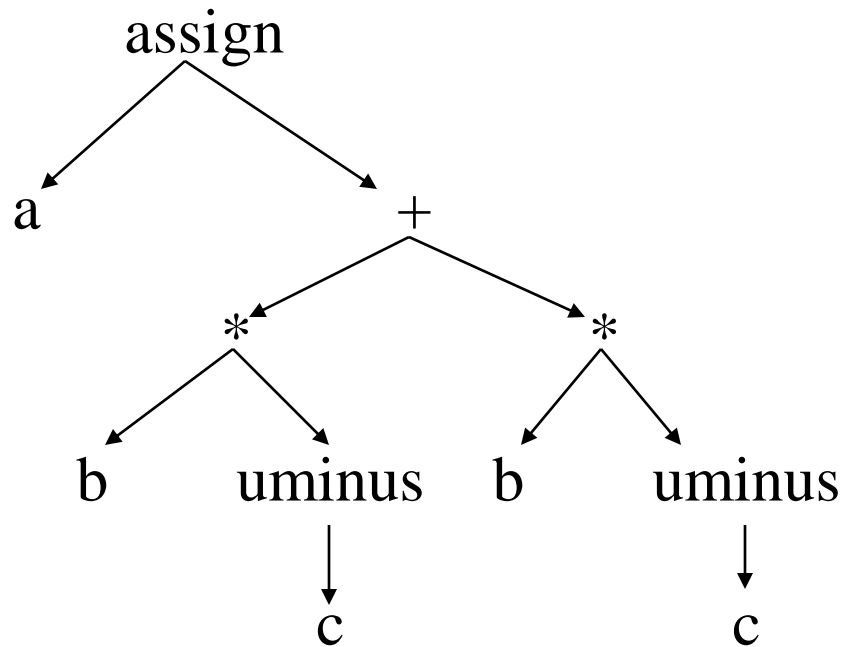

Syntax Tree

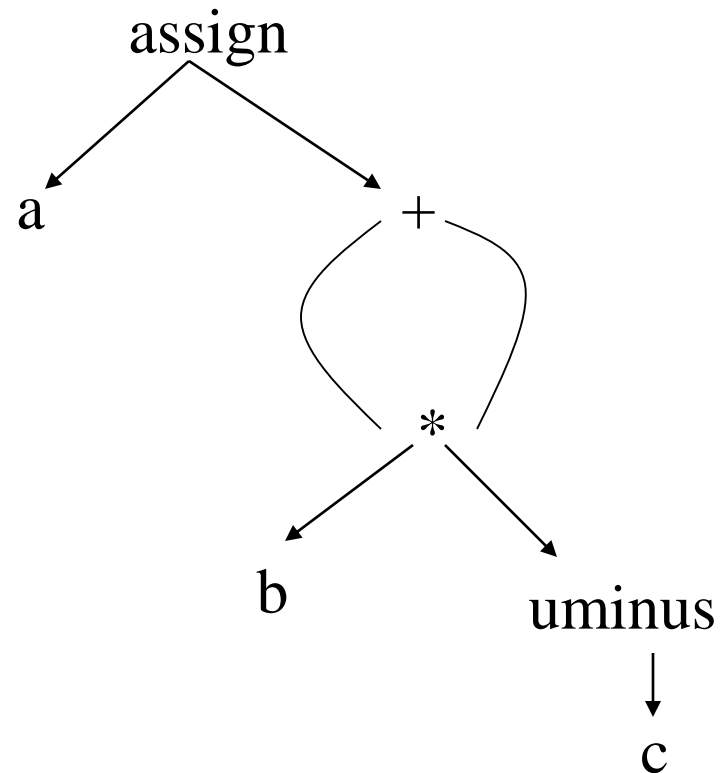

DAG

Syntax tree representation

0	id	b	
1	id	c	
2	uminus	1	
3	*	0	2
4	id	b	
5	id	c	
6	uminus	5	
7	*	4	6
8	+	3	7
9	id	a	
10	assign	9	8

All nodes in the syntax tree can be visited by following pointers, starting from the root at position 10

Syntax tree and DAG can be created using SDT

Types of Three-Address Statements

Binary Operator: `op y, z, result` or `result := y op z`
where `op` is a binary arithmetic or logical operator. This binary operator is applied to `y` and `z`, and the result of the operation is stored in `result`.

Ex: `add a, b, c`
 `gt a, b, c`
 `addr a, b, c`
 `addi a, b, c`

Unary Operator: `op y, , result` or `result := op y`
where `op` is a unary arithmetic or logical operator. This unary operator is applied to `y`, and the result of the operation is stored in `result`.

Ex: `uminus a, , c`
 `not a, , c`
 `inttoreal a, , c`

Three-Address Statements (cont.)

Move Operator: `mov y, , result` or `result := y`

where the content of `y` is copied into `result`.

Ex: `mov a, , c`
 `movi a, , c`
 `movr a, , c`

Unconditional Jumps: `jmp , , L` or `goto L`

It will jump to the three-address code with the label `L`, and the execution continues from that statement.

Ex: `jmp , , L1` `// jump to L1`
 `jmp , , 7` `// jump to the statement 7`

Three-Address Statements (cont.)

Conditional Jumps: `jmp relop y, z, L` or `if y relop z goto L`

It will jump to the three-address code with the label L if the result of `y relop z` is true, and the execution continues from that statement. If the result is false, the execution continues from the statement following this conditional jump statement.

Ex:

<code>jmpgt</code>	<code>y, z, L1</code>	// jump to L1 if <code>y > z</code>
<code>jmpgte</code>	<code>y, z, L1</code>	// jump to L1 if <code>y >= z</code>
<code>jmpe</code>	<code>y, z, L1</code>	// jump to L1 if <code>y == z</code>
<code>jmpne</code>	<code>y, z, L1</code>	// jump to L1 if <code>y != z</code>

Our relational operator can also be a unary operator.

<code>jmpnz</code>	<code>y, , L1</code>	// jump to L1 if y is not zero
<code>jmpz</code>	<code>y, , L1</code>	// jump to L1 if y is zero
<code>jmpt</code>	<code>y, , L1</code>	// jump to L1 if y is true
<code>jmpf</code>	<code>y, , L1</code>	// jump to L1 if y is false

Three-Address Statements (cont.)

Procedure Parameters: param x,, or param x

Procedure Calls: `call p, n,` or `call p, n`

where x is an actual parameter, we invoke the procedure p with n parameters.

Ex:

```
param x1, ,
param x2, ,
                                ➡ p (x1, . . . , xn)
param xn, ,
call  p, n,
```

```
f(x+1, y) →      add    x, 1, t1
                  param  t1,,
                  param  y,,
                  call   f, 2,
```


Three-Address Statements (cont.)

Indexed Assignments:

move $y[i], , x$ or $x := y[i]$
move $x, , y[i]$ or $y[i] := x$

Address and Pointer Assignments:

moveaddr $y, , x$ or $x := \&y$
movecont $y, , x$ or $x := *y$

Syntax-Directed Translation into Three-Address Code

$S \rightarrow \mathbf{id} := E$	$S.\text{code} = E.\text{code} \parallel \text{gen}(\text{'mov' } E.\text{place ' , ' id.place})$
$E \rightarrow E_1 + E_2$	$E.\text{place} = \text{newtemp}();$ $E.\text{code} = E_1.\text{code} \parallel E_2.\text{code} \parallel \text{gen}(\text{'add' } E_1.\text{place ' , ' } E_2.\text{place ' , ' } E.\text{place})$
$E \rightarrow E_1 * E_2$	$E.\text{place} = \text{newtemp}();$ $E.\text{code} = E_1.\text{code} \parallel E_2.\text{code} \parallel \text{gen}(\text{'mult' } E_1.\text{place ' , ' } E_2.\text{place ' , ' } E.\text{place})$
$E \rightarrow - E_1$	$E.\text{place} = \text{newtemp}();$ $E.\text{code} = E_1.\text{code} \parallel \text{gen}(\text{'uminus' } E_1.\text{place ' , ' } E.\text{place})$
$E \rightarrow (E_1)$	$E.\text{place} = E_1.\text{place};$ $E.\text{code} = E_1.\text{code}$
$E \rightarrow \mathbf{id}$	$E.\text{place} = \mathbf{id}.\text{place};$ $E.\text{code} = \text{null}$

- $E.\text{place}$ is the name that will hold the value of E
- $E.\text{code}$ is the sequence of three-address statements evaluating E
- \parallel - merging/concatenation

Syntax-Directed Translation (cont.)


$S \rightarrow \text{while } E \text{ do } S_1$	<pre>S.begin = newlabel(); S.after = newlabel(); S.code = gen(S.begin ":") E.code gen('jmpf' E.place ',', S.after) S₁.code gen('jmp' ',', S.begin) gen(S.after ':')</pre>
$S \rightarrow \text{if } E \text{ then } S_1 \text{ else } S_2$	<pre>S.else = newlabel(); S.after = newlabel(); S.code = E.code gen('jmpf' E.place ',', S.else) S₁.code gen('jmp' ',', S.after) gen(S.else ':') S₂.code gen(S.after ':')</pre>

Implementation of Three-Address Statements

- Each line of code contains one operator and up to three operands, represented as addresses
- Closer to the machine/targeted code than parse tree representation
- No of variants...quadraples, triples, indirect triples,....

Quadraples

- Consist of an **operation**, up to two **operands** and a **result**
- A+B would be translated into quads as:

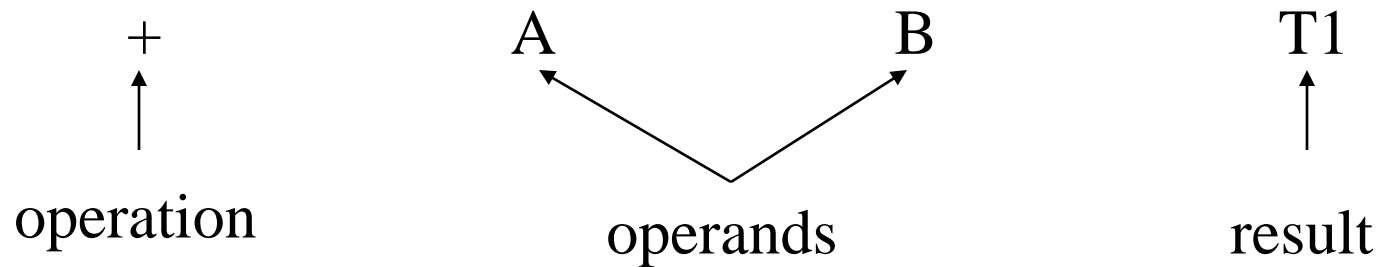

	Operator	Op1	Op2	Result
(1)	+	a	b	t1
(2)	-	c		t2
(3)	*	t1	t2	t3
(4)	/	t3	d	t4
(5)	=	t4		x

Adv: statements can be moved around

Dis: too much space wasted for temp

Quadraples representation of $x = (a+b) * (-c)/d$

Triples

- Don't use an extra temporary variable like quadraples rather pointer is used to reference

	Operator	Op1	Op2
(1)	+	a	b
(2)	-	c	
(3)	*	(1)	(2)
(4)	/	(3)	d
(5)	=	x	(4)

Adv: No wastage of space

Dis: statements can't be moved around

Indirect Triple

- Uses an addition array to list the pointers to the triples in the desired order

		Operator	Op1	Op2
(1)	(1)	+	a	b
(2)	(2)	-	c	
(3)	(3)	*	(1)	(2)
(4)	(4)	/	(3)	d
(5)	(5)	=	x	(4)