

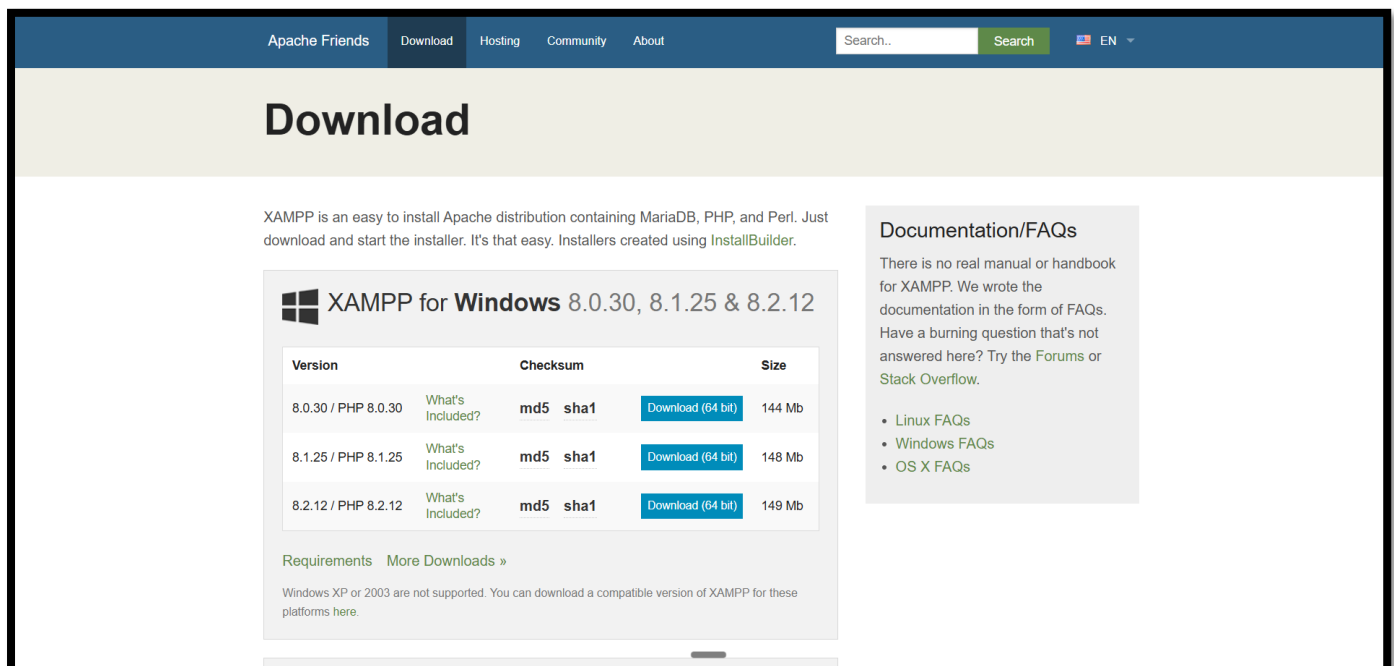
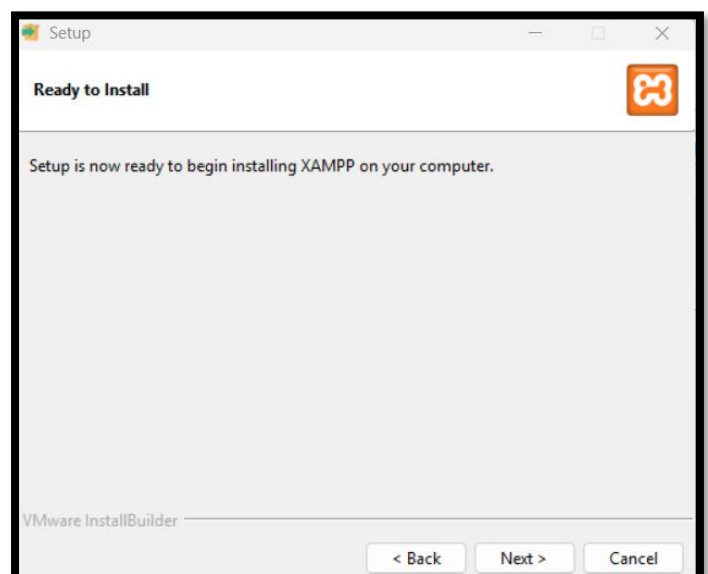
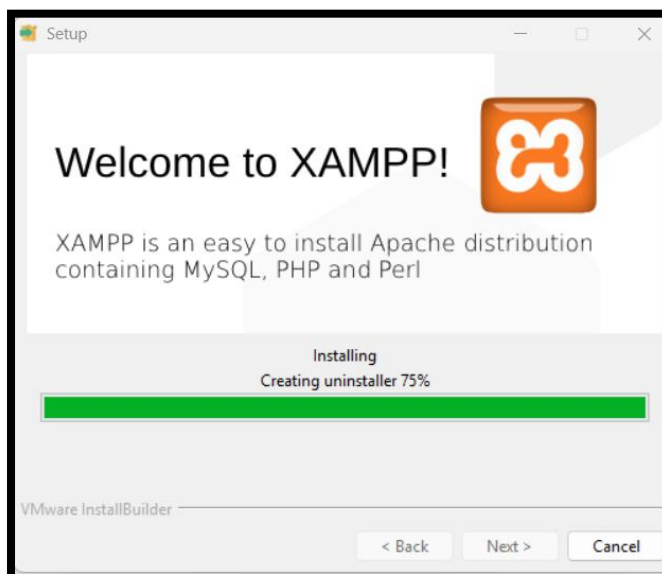
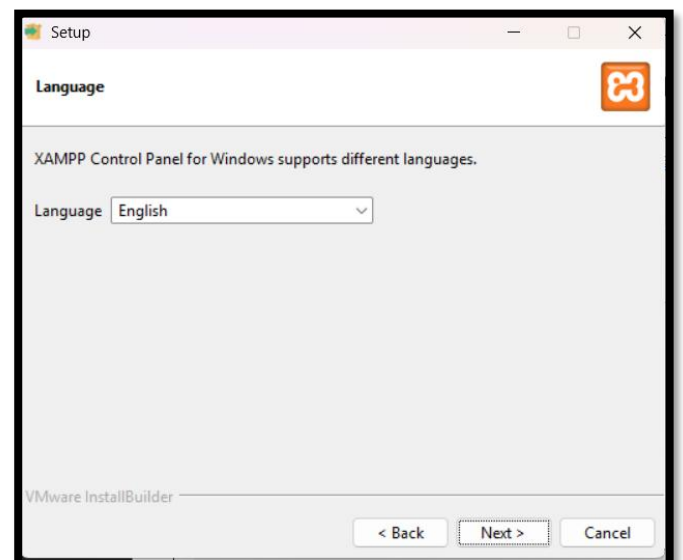
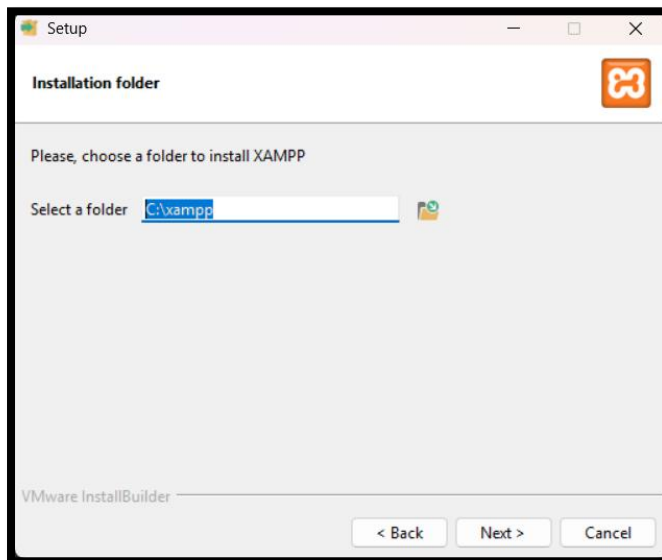


Experiment 10:



STEP 1: Download XAMPP Server

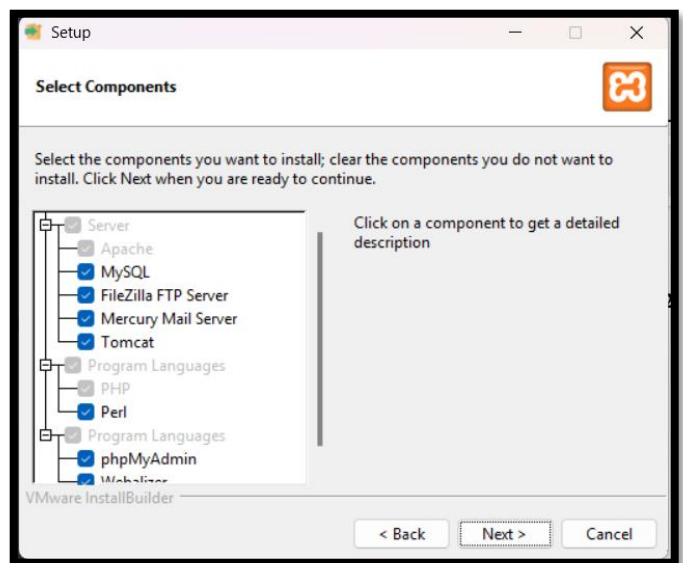


STEP 2: Install XAMPP

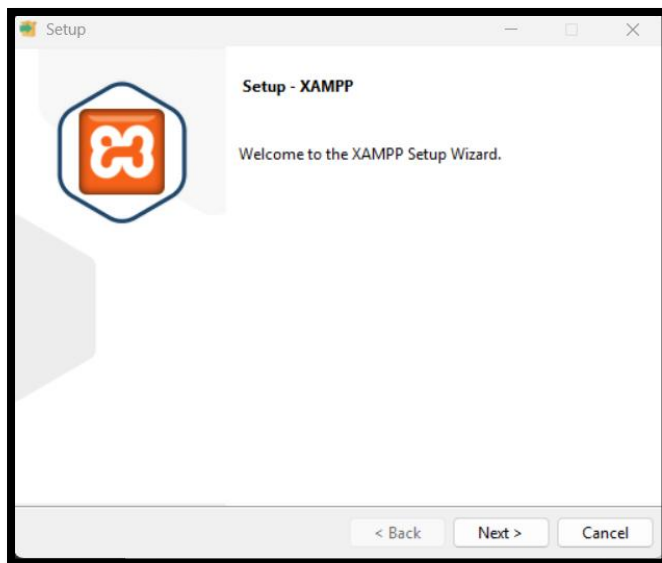

STEP 3: Open XAMPP Control Panel

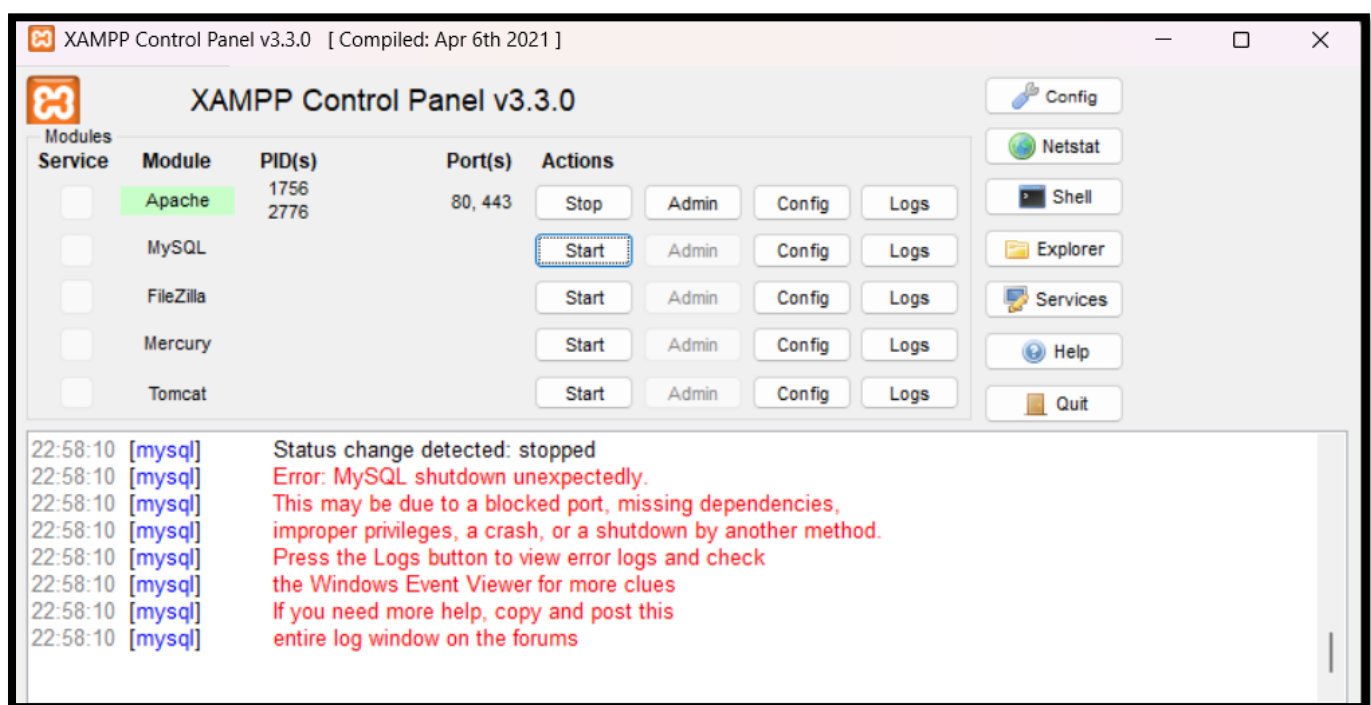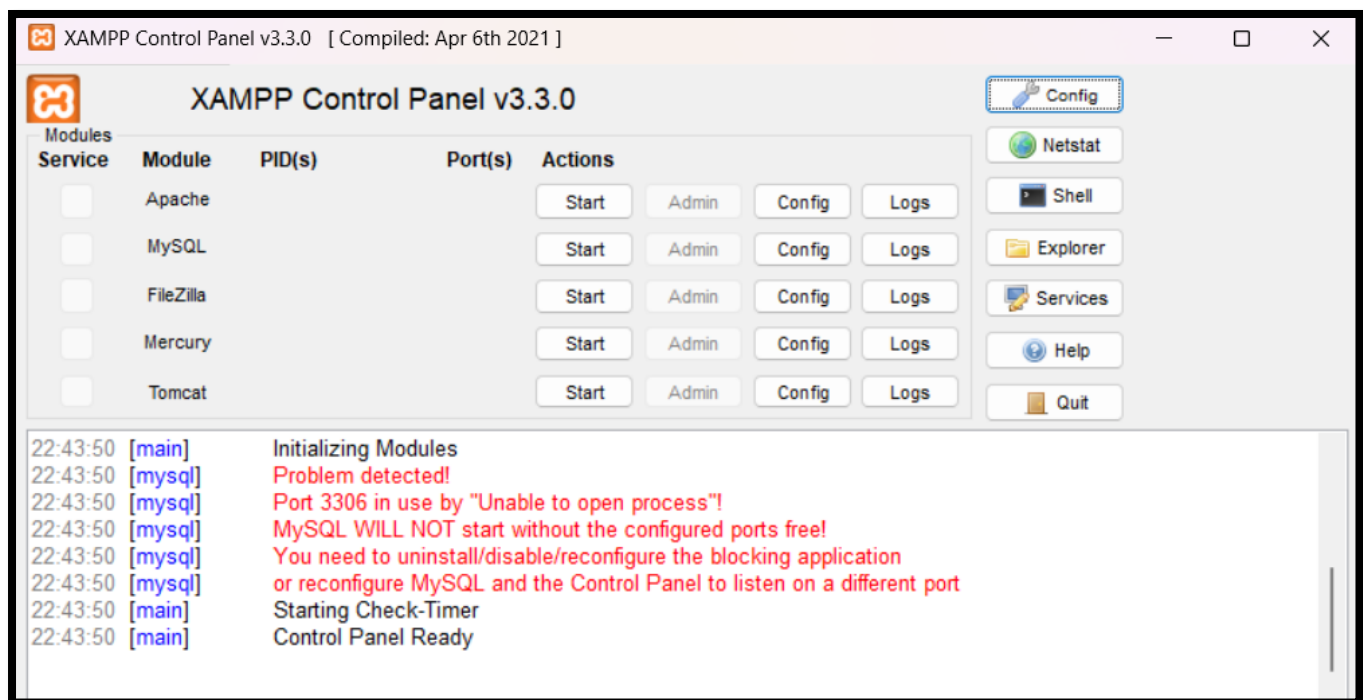

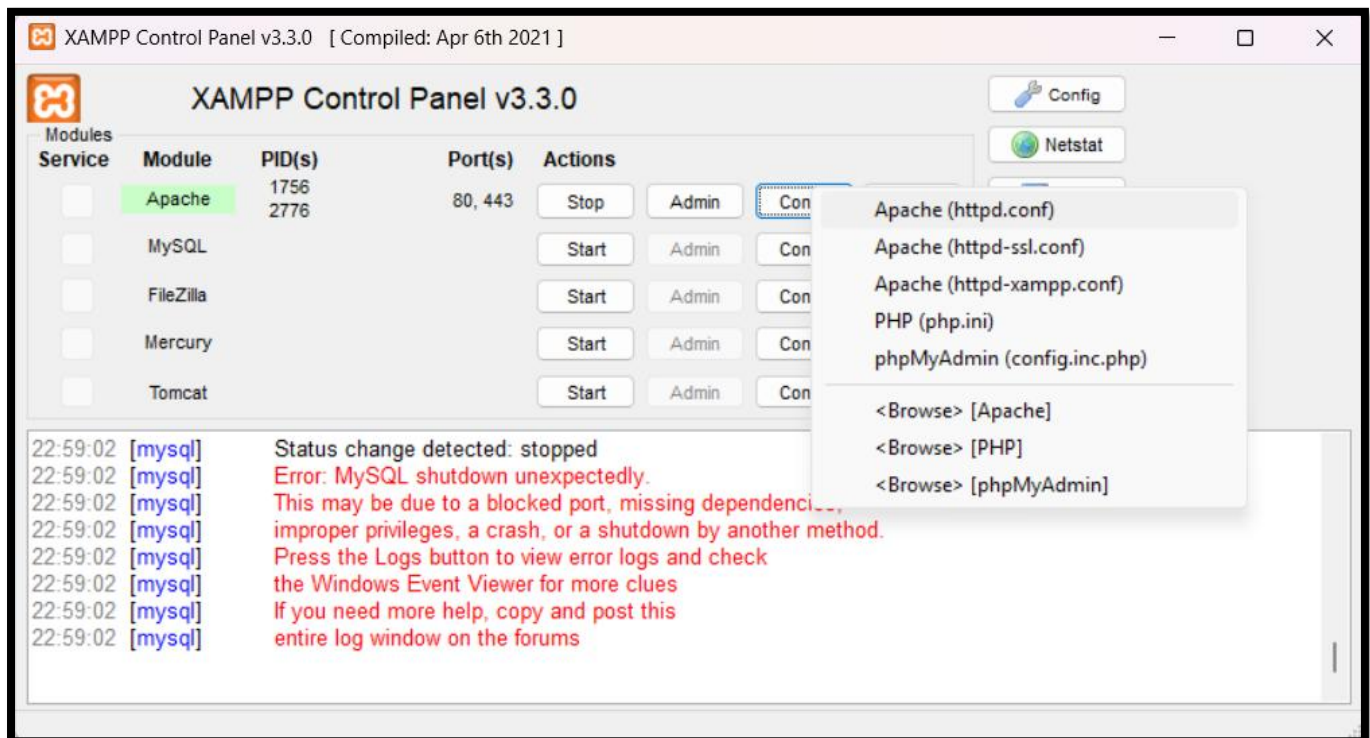

```
#
# Listen: Allows you to bind Apache to specific IP addresses and/or
# ports, instead of the default. See also the <VirtualHost>
# directive.
#
# Change this to Listen on specific IP addresses as shown below to
# prevent Apache from glomming onto all bound IP addresses.
#
#Listen 12.34.56.78:80
Listen 8080
```


```
ServerAdmin postmaster@localhost
```

```
#
# ServerName gives the name and port that the server uses to identify itself.
# This can often be determined automatically, but we recommend you specify
# it explicitly to prevent problems during startup.
#
# If your host doesn't have a registered DNS name, enter its IP address here.
#
ServerName localhost:8080
```


```
#
# When we also provide SSL we have to listen to the
# standard HTTP port (see above) and to the HTTPS port
#
Listen 4443
```

```
# The following options will be passed to all MySQL clients
[client]
# password          = your_password
port=3307
socket="C:/xampp/mysql/mysql.sock"
```




```
/* Bind to the localhost ipv4 address and tcp */
$cfg['Servers'][$i]['host'] = '127.0.0.1';
$cfg['Servers'][$i]['port'] = '3307';
$cfg['Servers'][$i]['connect_type'] = 'tcp';
```

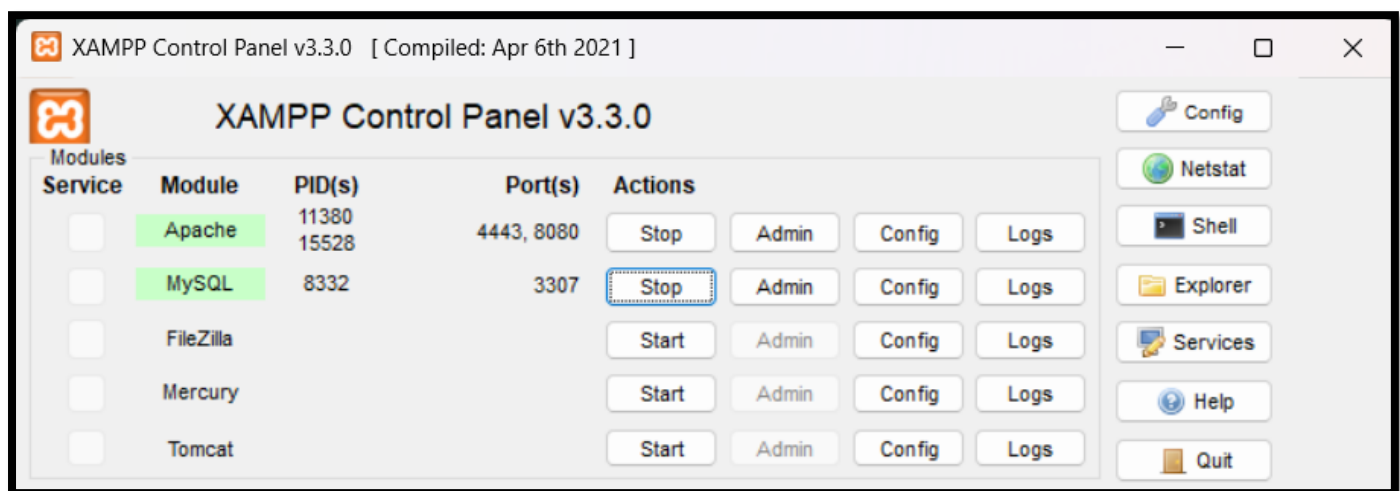


STEP 4: Open Browser & Go to <http://localhost:8080/phpmyadmin/>

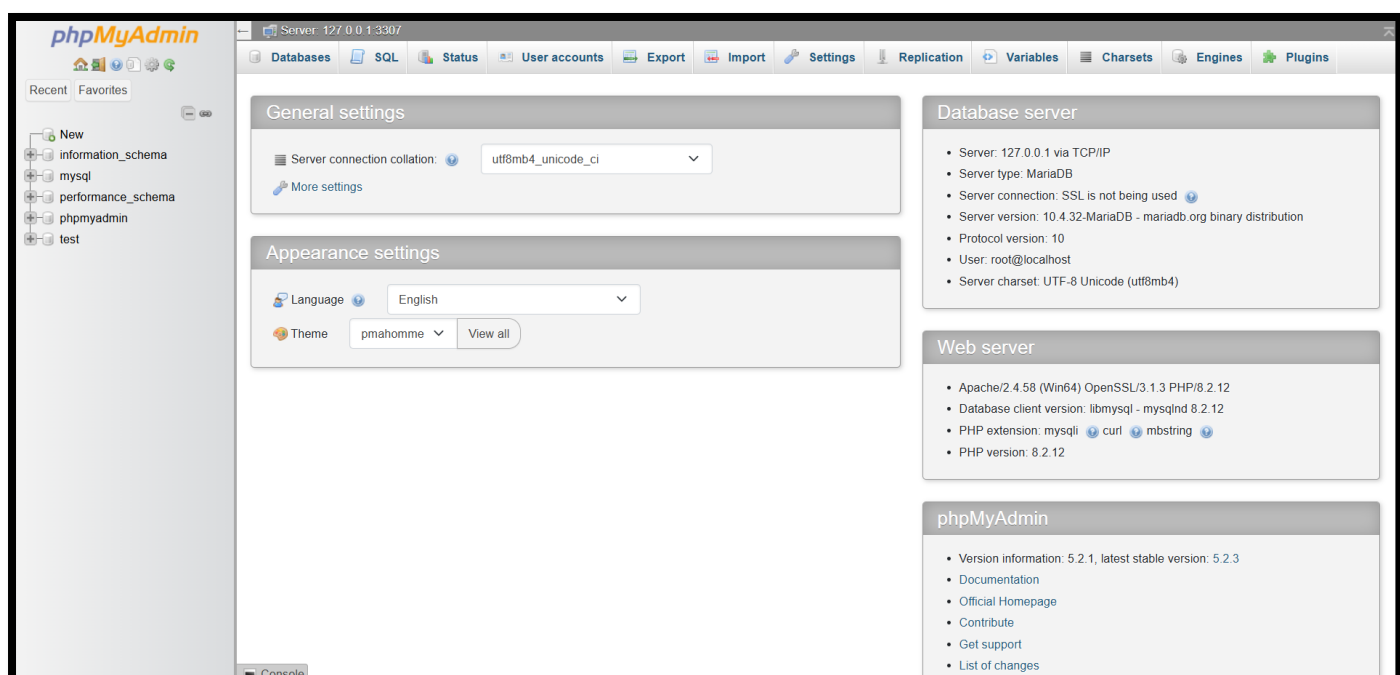


STEP 5: Create Database & Go to Run the Query

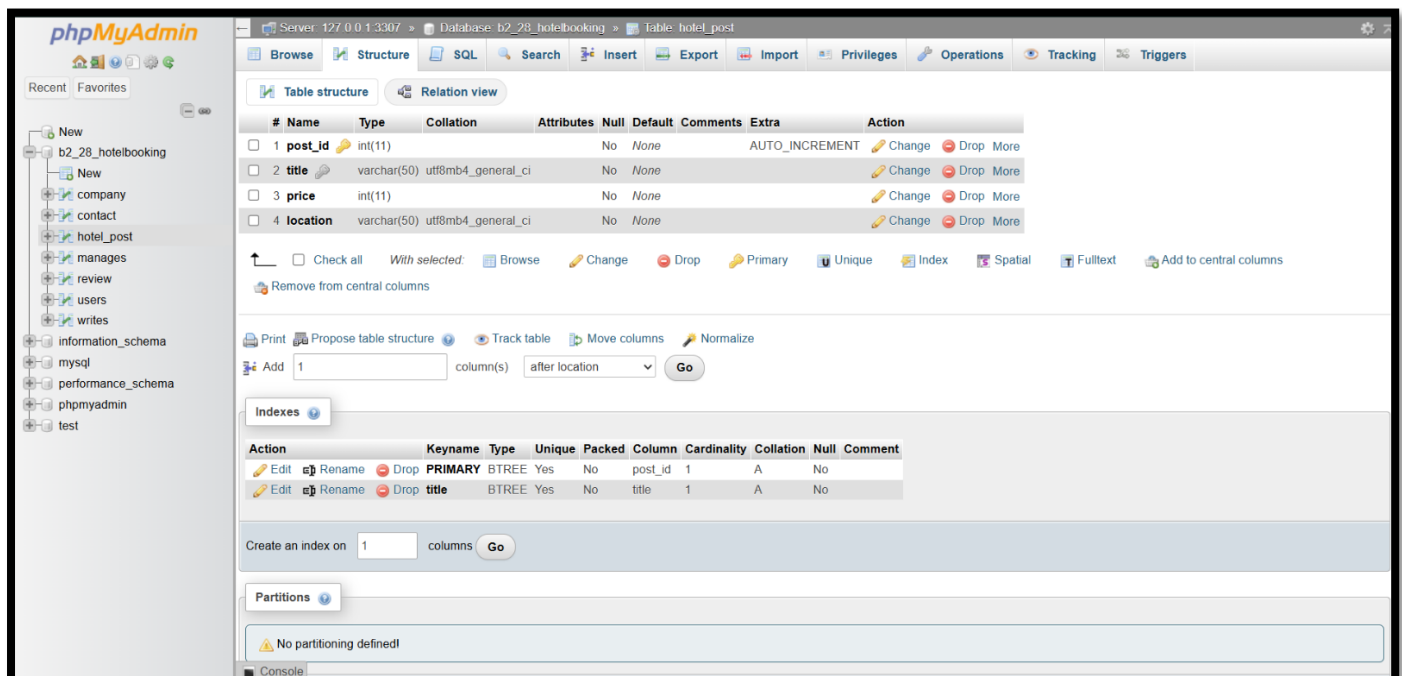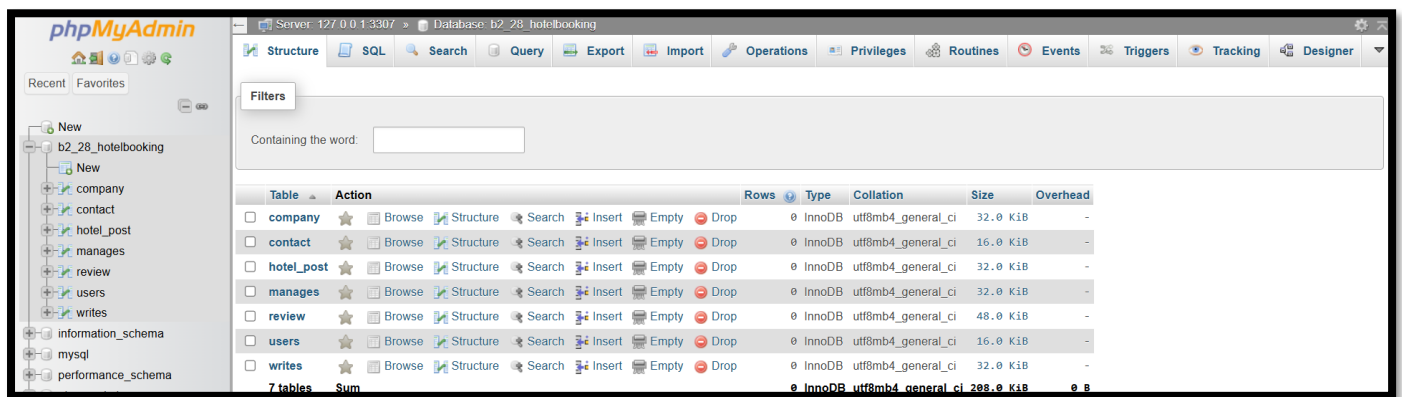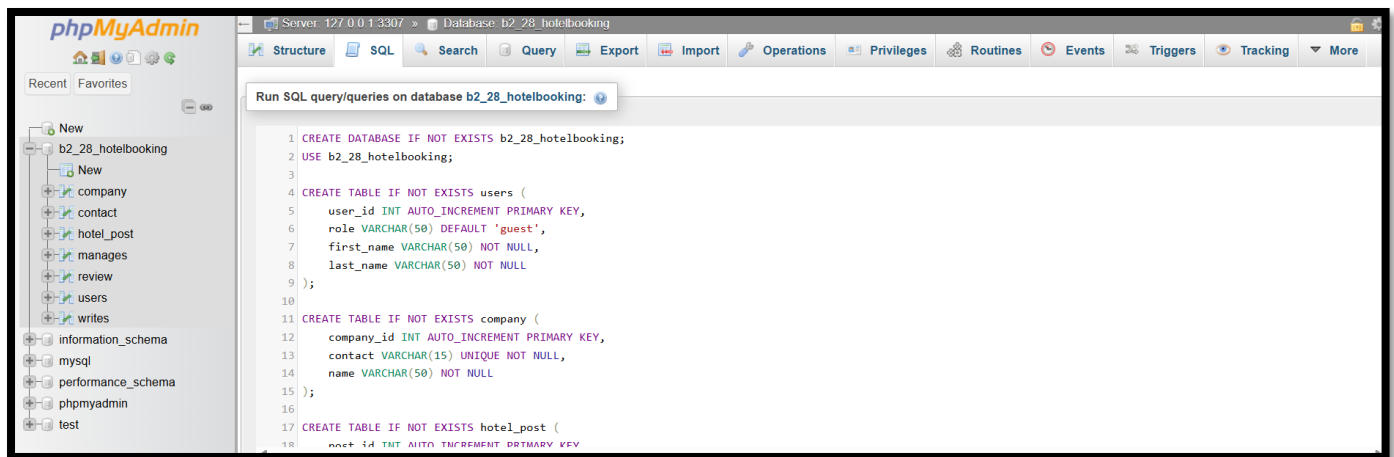



STEP 6: Download NetBeans & Create Java Project

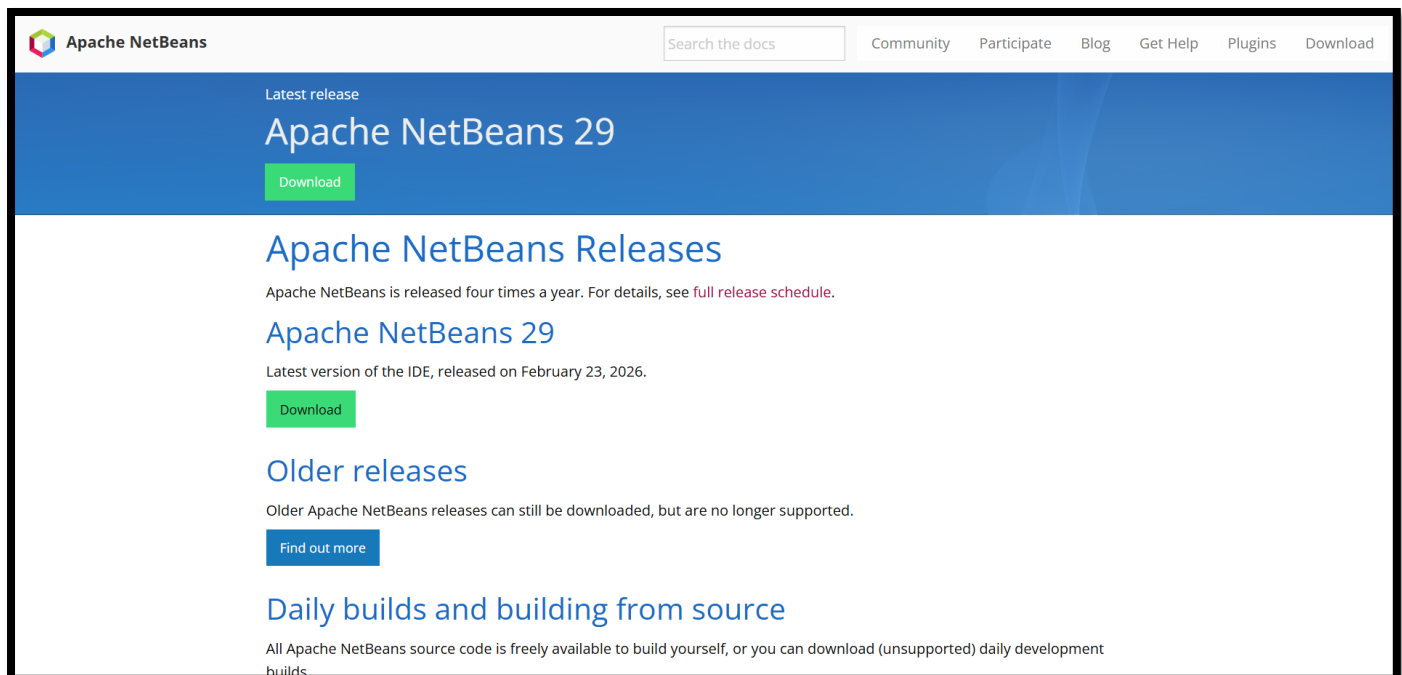


The screenshot shows the Apache NetBeans website. At the top, there is a navigation bar with links for Community, Participate, Blog, Get Help, Plugins, and Download. The main heading is "Latest release Apache NetBeans 29" with a green "Download" button. Below this, there is a section titled "Apache NetBeans Releases" with a subheading "Apache NetBeans 29" and a "Download" button. The text indicates it is the latest version of the IDE, released on February 23, 2026. There is also a section for "Older releases" with a "Find out more" button, and a section for "Daily builds and building from source".

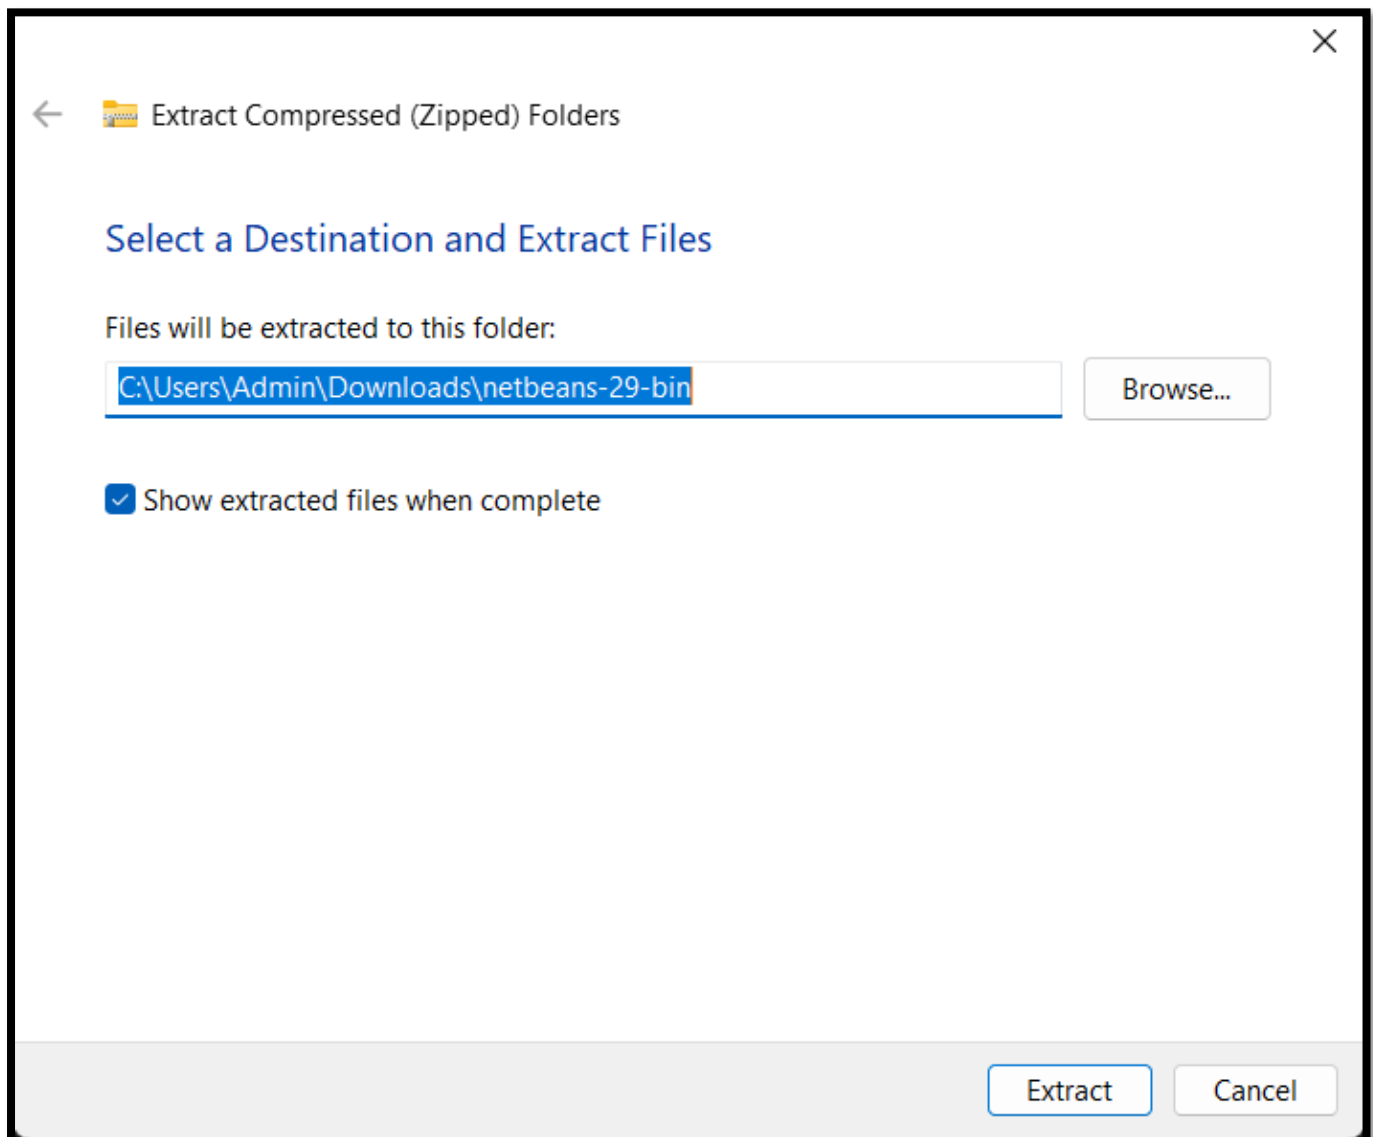

The screenshot shows a Windows dialog box titled "Extract Compressed (Zipped) Folders". It has a back arrow and a close button (X) in the top left corner. The main heading is "Select a Destination and Extract Files". Below this, it says "Files will be extracted to this folder:" followed by a text box containing the path "C:\Users\Admin\Downloads\netbeans-29-bin" and a "Browse..." button. There is a checkbox labeled "Show extracted files when complete" which is checked. At the bottom right, there are "Extract" and "Cancel" buttons.

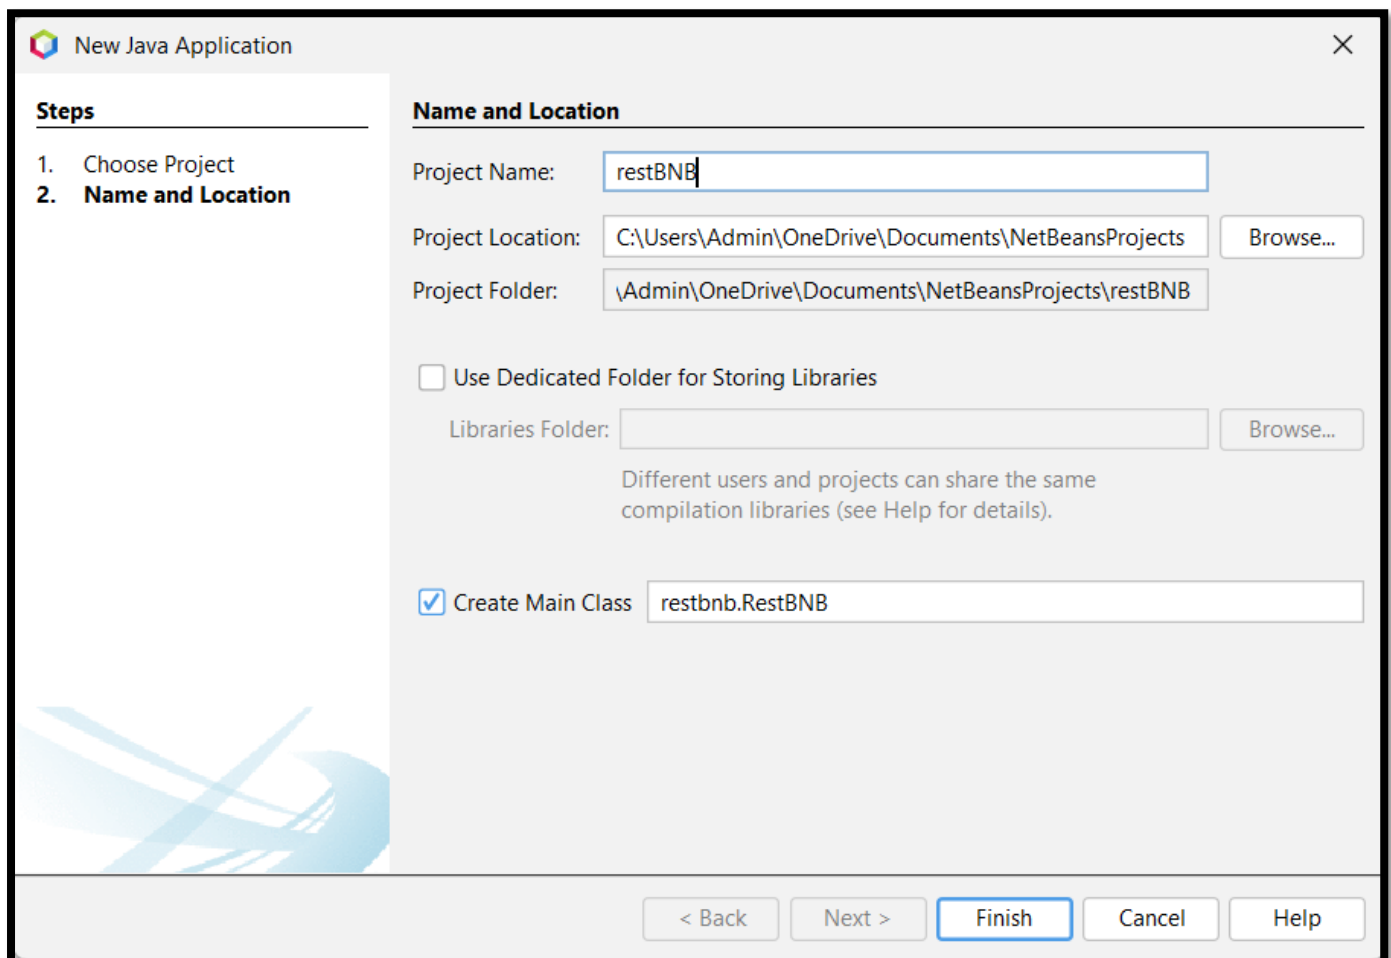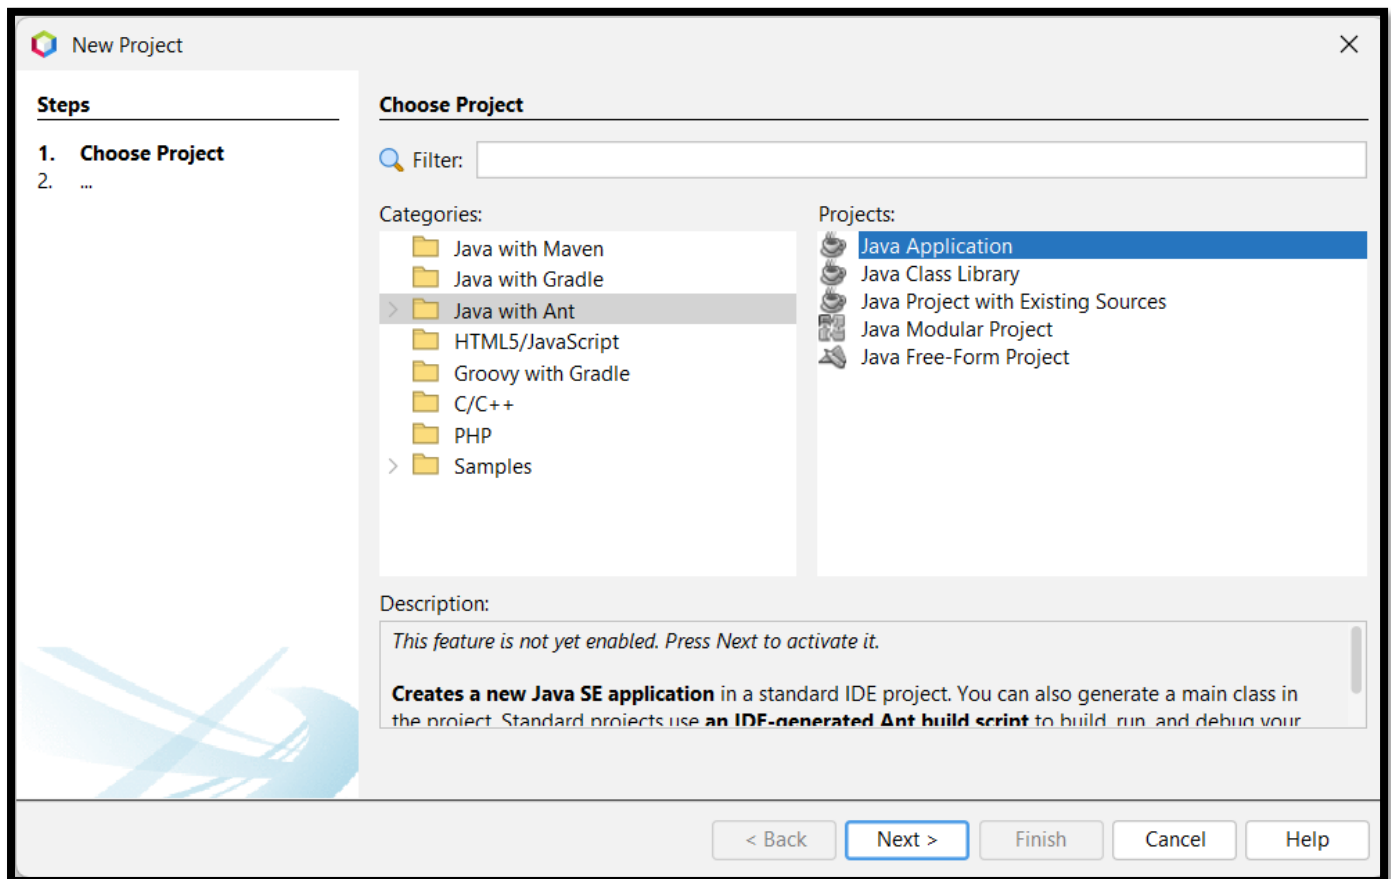

STEP 7: Create Form

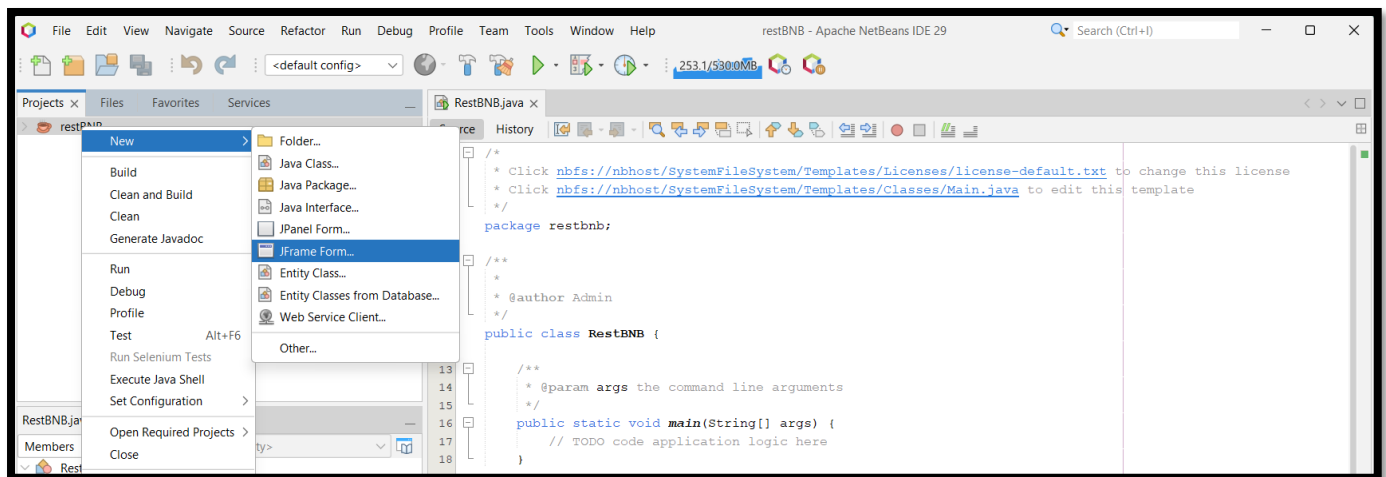


The 'New JFrame Form' dialog box is shown. It has a 'Steps' section on the left with two steps: '1. Choose File Type' and '2. Name and Location'. The 'Name and Location' section contains the following fields:

- Class Name:
- Project:
- Location:
- Package:
- Created File:
- Superclass:
- Interfaces:


A warning message is displayed at the bottom:  Warning: It is highly recommended that you do not place Java classes in the default package.

The bottom of the dialog has navigation buttons: '< Back', 'Next >', 'Finish' (highlighted), 'Cancel', and 'Help'.

STEP 8: Design the Form (GUI)

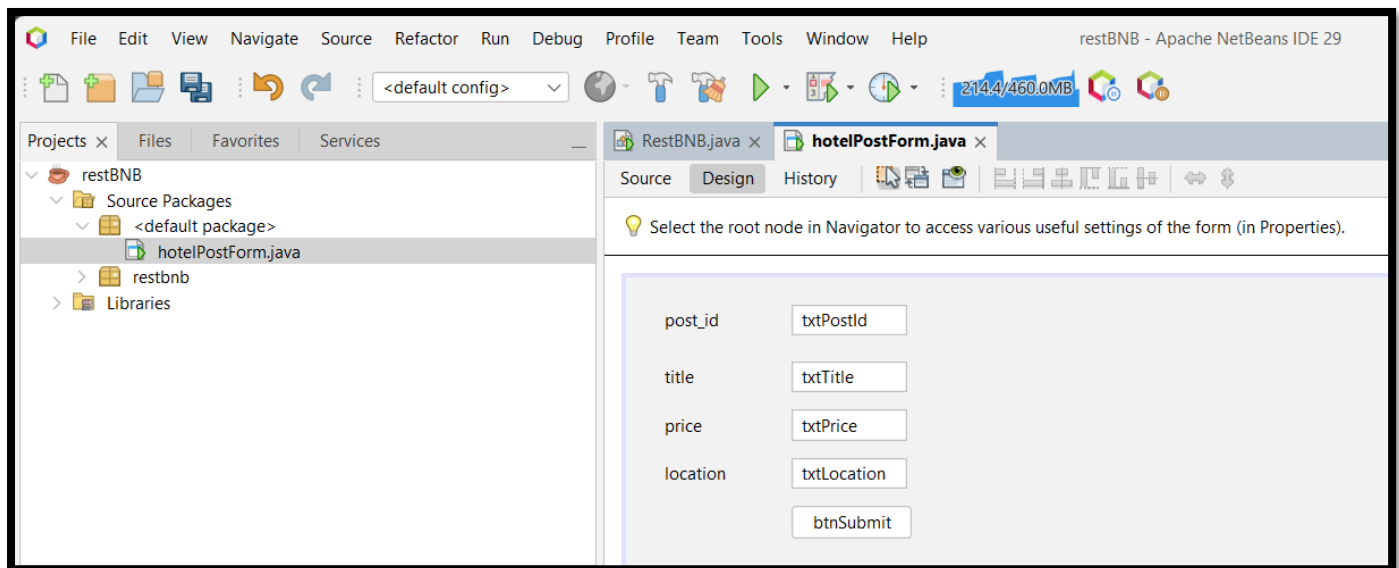

STEP 9: Add Button Code

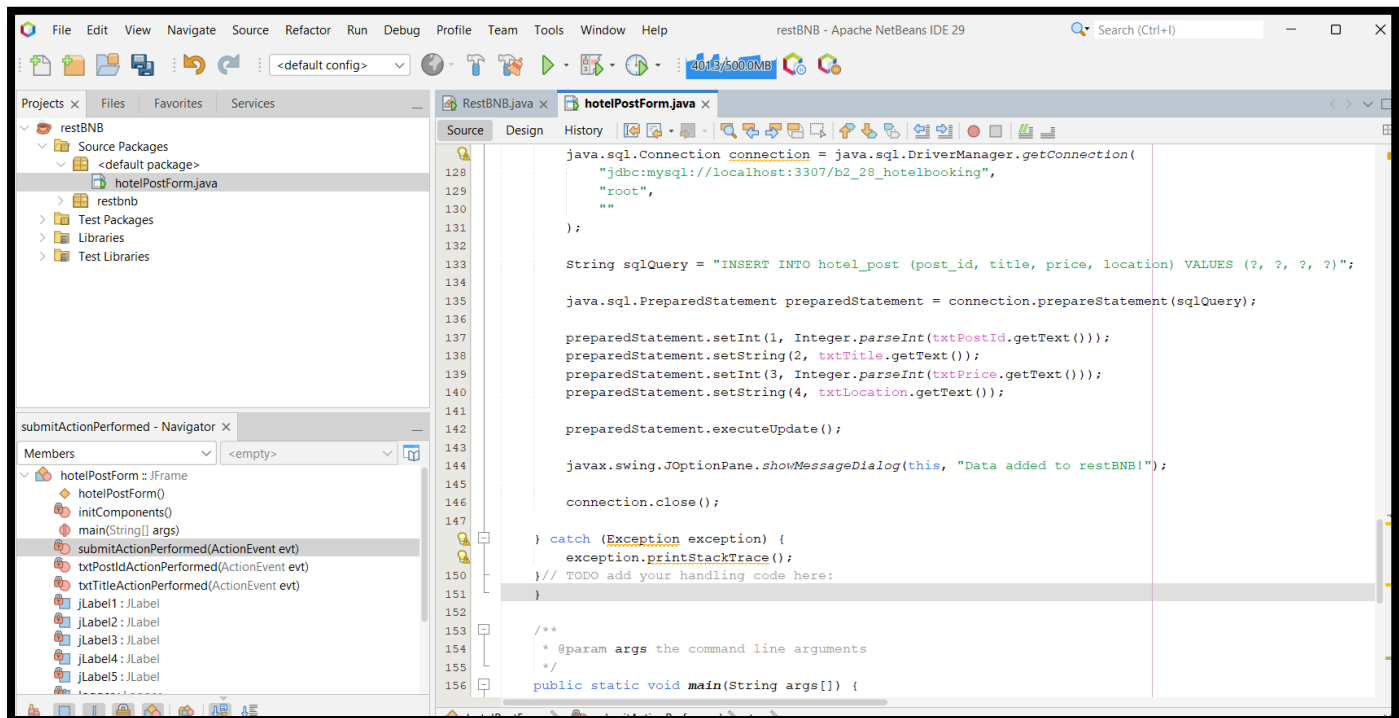

STEP 10: Add MySQL Connector



The screenshot shows the MySQL Community Downloads page for Connector/J 9.6.0. The page has a navigation bar with 'General Availability (GA) Releases', 'Archives', and an information icon. Below the navigation bar, the title 'Connector/J 9.6.0' is displayed. A dropdown menu for 'Select Operating System:' is set to 'Platform Independent'. Two download options are listed:

Download Option	Version	Size	Action
Platform Independent (Architecture Independent), Compressed TAR Archive (mysql-connector-j-9.6.0.tar.gz)	9.6.0	4.3M	Download
Platform Independent (Architecture Independent), ZIP Archive (mysql-connector-j-9.6.0.zip)	9.6.0	5.1M	Download

Below the download options, a note states: 'We suggest that you use the MD5 checksums and GnuPG signatures to verify the integrity of the packages you download.' The MD5 checksums are provided for each download option.

The screenshot shows a file explorer window displaying the contents of the 'mysql-connector-j-9.6.0' directory. The files and folders are listed in a table:

Name	Date modified	Type	Size
Today			
build.xml	12-04-2026 01:13	Microsoft Edge HT...	90 KB
CHANGES	12-04-2026 01:13	File	286 KB
INFO_BIN	12-04-2026 01:13	File	1 KB
INFO_SRC	12-04-2026 01:13	File	1 KB
LICENSE	12-04-2026 01:13	File	81 KB
mysql-connector-j-9.6.0.jar	12-04-2026 01:13	Executable Jar File	2,542 KB
README	12-04-2026 01:13	File	3 KB
src	12-04-2026 01:13	File folder	

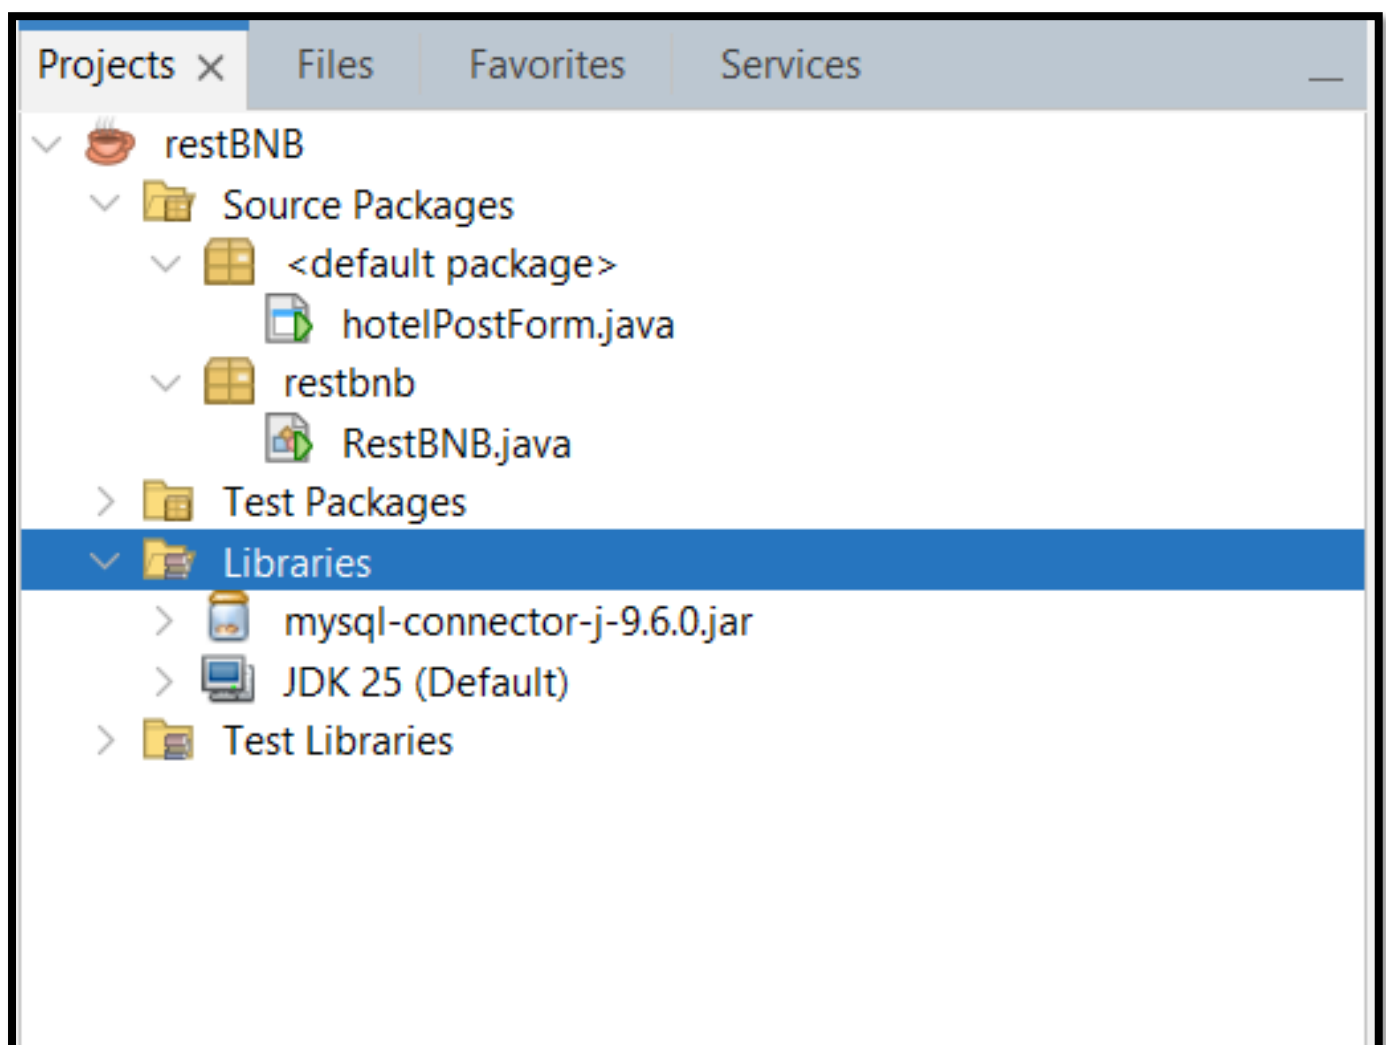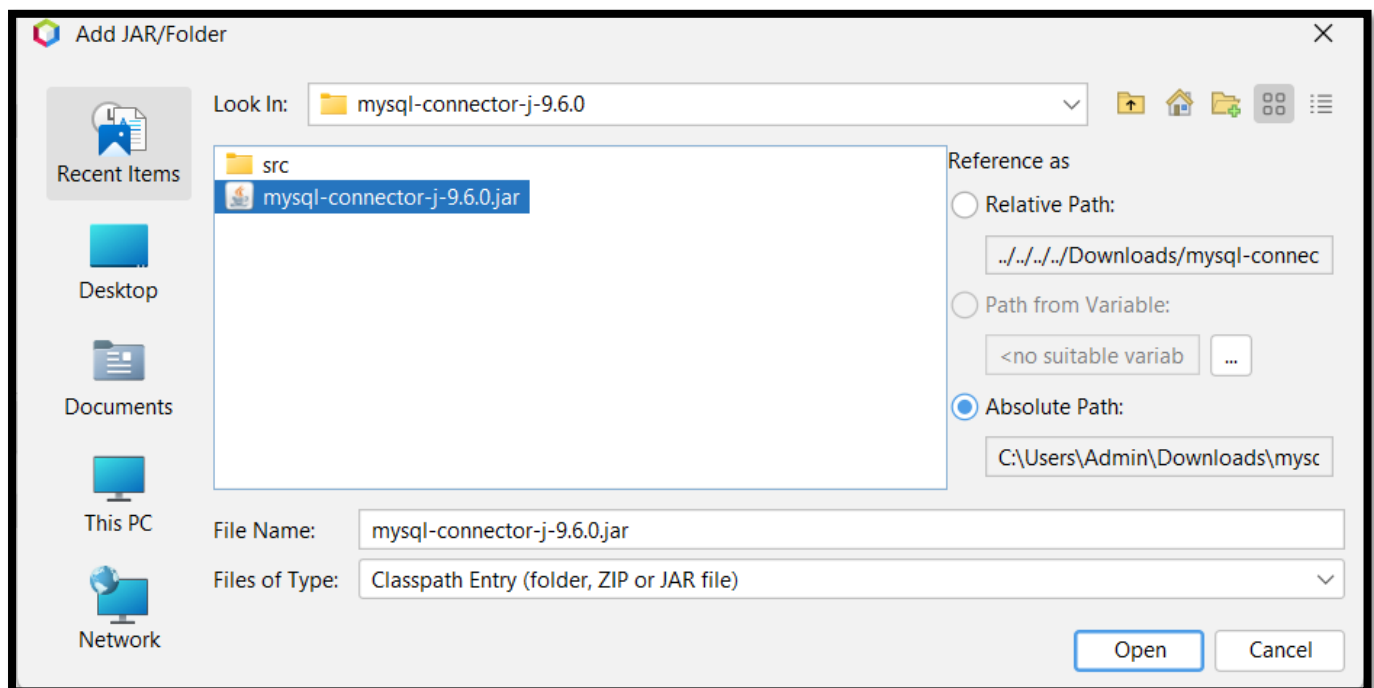


STEP 11: Run *restBNB.java* file


A web form with the following fields and values:

- post_id: 1
- title: ShivamHotels
- price: 3000
- location: Mumbai

A "submit" button is located at the bottom of the form.

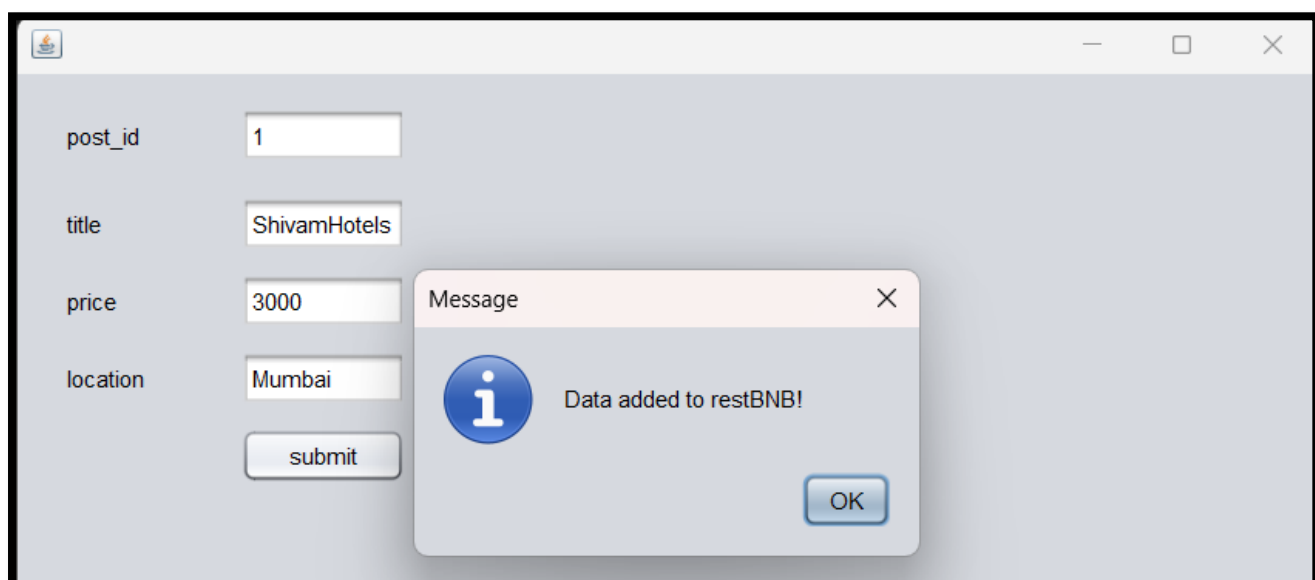

The same web form as above, but with a "Message" dialog box overlaying it. The message says: "Data added to restBNB!". The dialog box has an "OK" button.

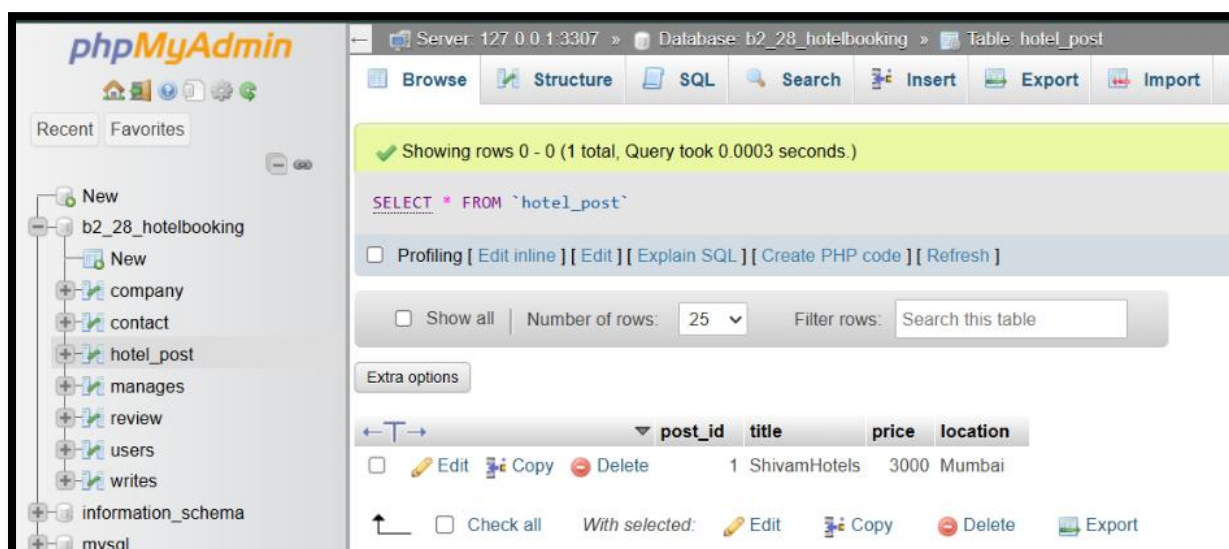STEP 12: Open phpMyAdmin.

The screenshot shows the phpMyAdmin interface. The left sidebar shows the database structure, with 'b2_28_hotelbooking' selected. The main area shows the 'hotel_post' table with the following data:

post_id	title	price	location
1	ShivamHotels	3000	Mumbai

The interface also shows the SQL query: `SELECT * FROM `hotel_post`` and the number of rows (1 total).