

Experiment 08:


❖ Ping Scan (scanme.nmap.org)

Target: Profile:

Command:

Hosts		Nmap Output				
OS	Host	nmap -sn scanme.nmap.org				
	scanme.nmap.org	Starting Nmap 7.95 (https://nmap.org) at 2026-10-03 12:27 India Standard Time Nmap scan report for scanme.nmap.org (45.33.32.156) Host is up (0.00s latency). <u>Nmap done:</u> 1 IP address (1 host up) scanned in 0.06 seconds				

Nmap Output						Ports / Hosts		Topology		Host Details		Scans	
Port		Protocol		State		Service		Version					

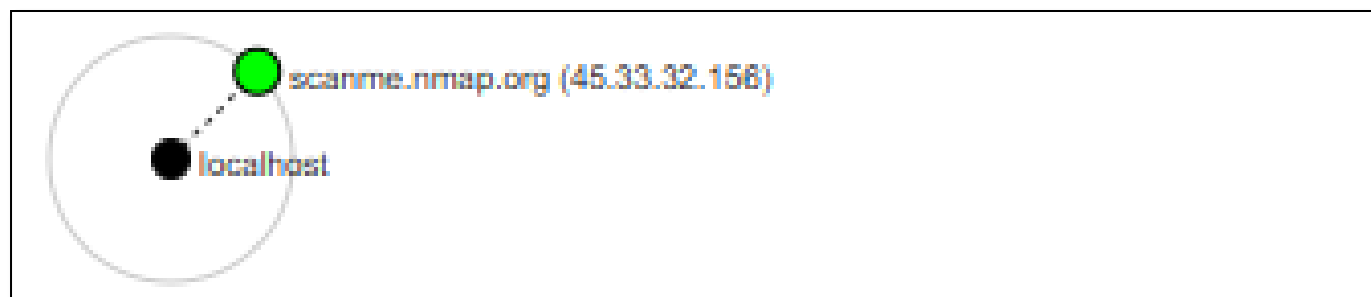

Nmap Output	Ports / Hosts	Topology	Host Details	Scans
▼ scanme.nmap.org (45.33.32.156)				
▼ Host Status				
State:	up			
Open ports:	0			
Filtered ports:	0			
Closed ports:	0			
Scanned ports:	0			
Up time:	Not available			
Last boot:	Not available			

Nmap Output	Ports / Hosts	Topology	Host Details	Scans
Status	Command			
Unsaved	nmap -sn scanme.nmap.org			


Observation:

- **Nmap Output:** The Nmap output shows that scanme.nmap.org is reachable and resolves to IP address **45.33.32.156**. The host is reported as **up** with very low latency.
- **Ports/Hosts:** The Ports/Hosts section shows **no ports listed**, as the Ping Scan is used for host discovery rather than port scanning.
- **Topology:** The topology view shows the local system (localhost) connected directly to scanme.nmap.org with IP address **45.33.32.156**.
- **Host Details:** The Host Details section shows the host as **up**, with **0 open ports, 0 filtered ports, 0 closed ports, and 0 scanned ports**. Uptime and last boot information are unavailable.
- **Scans:** The Scans section shows the executed Ping Scan command `nmap -sn scanme.nmap.org`.

❖ Quick Scan (scanme.nmap.org)

Target:	scanme.nmap.org	▼	Profile:	Quick scan
Command:	nmap -T4 -F scanme.nmap.org			
Hosts	Services	Nmap Output	Ports / Hosts	Topology
OS	Host	Host Details		
scanme.nmap.org		nmap -T4 -F scanme.nmap.org Starting Nmap 7.95 (https://nmap.org) at 2026-10-01 11:26 India Standard Time Nmap scan report for scanme.nmap.org (45.33.32.156) Host is up (0.29s latency). Not shown: 97 closed tcp ports (reset) PORT STATE SERVICE 22/tcp open ssh 80/tcp open http 443/tcp open https Nmap done: 1 IP address (1 host up) scanned in 1.52 seconds		

Nmap Output	Ports / Hosts		Topology	Host Details	Scans
	Port	Protocol	State	Service	Version
	22	tcp	open	ssh	
	80	tcp	open	http	
	443	tcp	open	https	

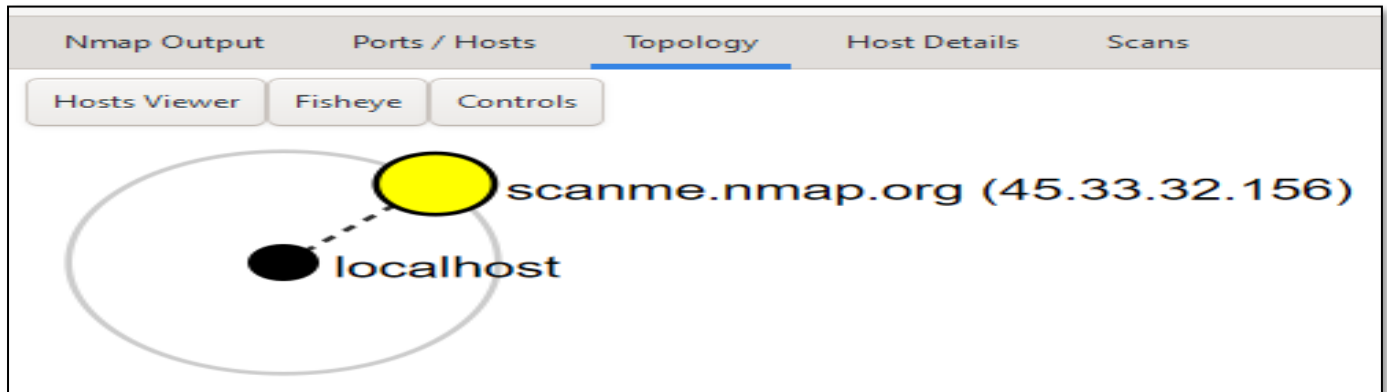

Nmap Output	Ports / Hosts	Topology	Host Details	Scans
scanme.nmap.org (45.33.32.156) Host Status State: up Open ports: 3 Filtered ports: 0 Closed ports: 97 Scanned ports: 100				

Nmap Output	Ports / Hosts	Topology	Host Details	Scans
Status	Command			
Unsaved	nmap -T4 -A -v scanme.nmap.org			
Unsaved	nmap -sn scanme.nmap.org			
Unsaved	nmap -T4 -F scanme.nmap.org			

Observation:

- **Nmap Output:** The Quick Scan output shows scanme.nmap.org as **up** and identifies **22/tcp** (SSH), **80/tcp** (HTTP), and **443/tcp** (HTTPS) as open. It also indicates that most of the scanned ports were closed.
- **Ports/Hosts:** The Ports/Hosts section lists the three detected open ports — **22, 80 and 443** — along with their corresponding services.

- **Topology:** The topology displays localhost connected to scanme.nmap.org (45.33.32.156), representing the discovered network relationship.
- **Host Details:** The Host Details view reports the host as **up**, with **3 open ports, 0 filtered ports and 97 closed ports**, giving a summary of the 100 ports scanned.
- **Scans:** The Scans section records the Quick Scan command along with the earlier Ping and Intense scan commands.

❖ Intense Scan (scanme.nmap.org)

Target: scanme.nmap.org Profile: Intense scan

Command: nmap -T4 -A -v scanme.nmap.org

Hosts Services

OS Host

scanme.nmap.org


Nmap Output Ports / Hosts Topology Host Details Scans

nmap -T4 -A -v scanme.nmap.org

```
Starting Nmap 7.95 ( https://nmap.org ) at 2026-10-01 07:17 India Standard Time
NSE: Loaded 157 scripts for scanning.
NSE: Script Pre-scanning.
Initiating NSE at 07:17
Completed NSE at 07:17, 0.00s elapsed
Initiating NSE at 07:17
Completed NSE at 07:17, 0.00s elapsed
Initiating NSE at 07:17
Completed NSE at 07:17, 0.00s elapsed
Initiating Ping Scan at 07:17
Scanning scanme.nmap.org (45.33.32.156) [4 ports]
Completed Ping Scan at 07:17, 0.03s elapsed (1 total hosts)
Initiating Parallel DNS resolution of 1 host. at 07:17
Completed Parallel DNS resolution of 1 host. at 07:17, 0.01s elapsed
Initiating SYN Stealth Scan at 07:17
Scanning scanme.nmap.org (45.33.32.156) [1000 ports]
Discovered open port 443/tcp on 45.33.32.156
Discovered open port 80/tcp on 45.33.32.156
Discovered open port 22/tcp on 45.33.32.156
Discovered open port 9929/tcp on 45.33.32.156
Completed SYN Stealth Scan at 07:17, 4.77s elapsed (1000 total ports)
Initiating Service scan at 07:17
Scanning 4 services on scanme.nmap.org (45.33.32.156)
Completed Service scan at 07:18, 13.86s elapsed (4 services on 1 host)
Initiating OS detection (try #1) against scanme.nmap.org (45.33.32.156)
Retrying OS detection (try #2) against scanme.nmap.org (45.33.32.156)
Initiating Traceroute at 07:18
Completed Traceroute at 07:18, 3.04s elapsed
Initiating Parallel DNS resolution of 6 hosts. at 07:18
Completed Parallel DNS resolution of 6 hosts. at 07:18, 5.52s elapsed
NSE: Script scanning 45.33.32.156.
Initiating NSE at 07:18
Completed NSE at 07:18, 7.61s elapsed
Initiating NSE at 07:18
Completed NSE at 07:18, 1.14s elapsed
```

Filter Hosts

Nmap Output	Ports / Hosts	Topology	Host Details	Scans
Port	Protocol	State	Service	Version
22	tcp	open	ssh	OpenSSH 6.6.1p1 Ubuntu 2ubuntu2.13 (Ubuntu Linux; protocol 2.0)
80	tcp	open	http	Apache httpd 2.4.7 ((Ubuntu))
443	tcp	open	http-proxy	(bad gateway)
9929	tcp	open	nping-echo	Nping echo

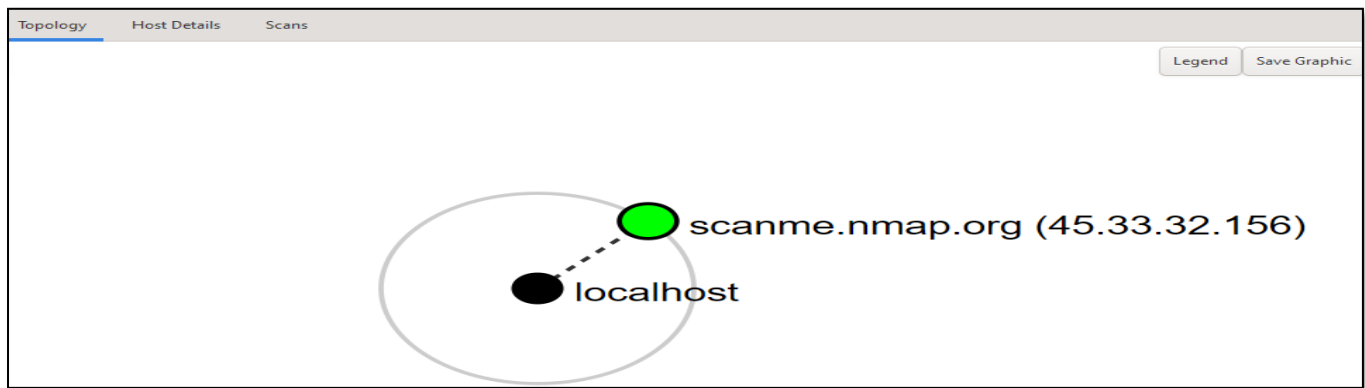

The screenshot shows the 'Host Details' tab for the target 'scanme.nmap.org (45.33.32.156)'. The 'Host Status' section displays the following information:

- State: up
- Open ports: 4 (illustrated with a penguin icon)
- Filtered ports: 0
- Closed ports: 996
- Scanned ports: 1000
- Up time: 2825068 (illustrated with a green box icon)
- Last boot: Sat Aug 29 14:33:57 2026

Status	Command
Unsaved	nmap -T4 -A -v scanme.nmap.org
Unsaved	nmap -sn scanme.nmap.org
Unsaved	nmap -T4 -F scanme.nmap.org
Unsaved	nmap -T4 -A -v scanme.nmap.org
Unsaved	nmap -T4 -A -v scanme.nmap.org

Observation:

- Nmap Output:** The Intense Scan performs a detailed scan of scanme.nmap.org and shows discovery of **ports 22, 80, 443 and 9929**. The output also performs service detection, OS detection, traceroute and NSE-based scanning.

- **Ports/Hosts:** The Ports/Hosts section provides detailed service information for the detected open ports, including **OpenSSH on port 22, Apache HTTPD on port 80, HTTP-proxy on port 443 and Nping-echo on port 9929.**
- **Topology:** The topology view shows the connection between localhost and scanme.nmap.org (45.33.32.156).
- **Host Details:** The Host Details section shows the host as **up**, with **4 open ports, 0 filtered ports and 996 closed ports out of 1000 scanned ports**, along with uptime information.
- **Scans:** The Scans section contains the Intense Scan command along with the previously executed Ping and Quick scans.

❖ Ping Scan (sfit.ac.in)

Target: 119.79.62.121 Profile: Ping scan

Command: `nmap -sn 119.79.62.121`

Hosts Services

OS Host

scanme.nmap.org

119.79.62.121

Nmap Output Ports / Hosts Topology Host Details Scans

nmap -sn 119.79.62.121

Starting Nmap 7.95 (<https://nmap.org>) at 2026-10-03 12:43 India Standard Time
Nmap scan report for 119.79.62.121
Host is up (0.00s latency).
Nmap done: 1 IP address (1 host up) scanned in 13.05 seconds

Hosts Services


OS Host


scanme.nmap.org

119.79.62.121

Nmap Output Ports / Hosts Topology Host Details Scans

Port	Protocol	State	Service	Version
------	----------	-------	---------	---------

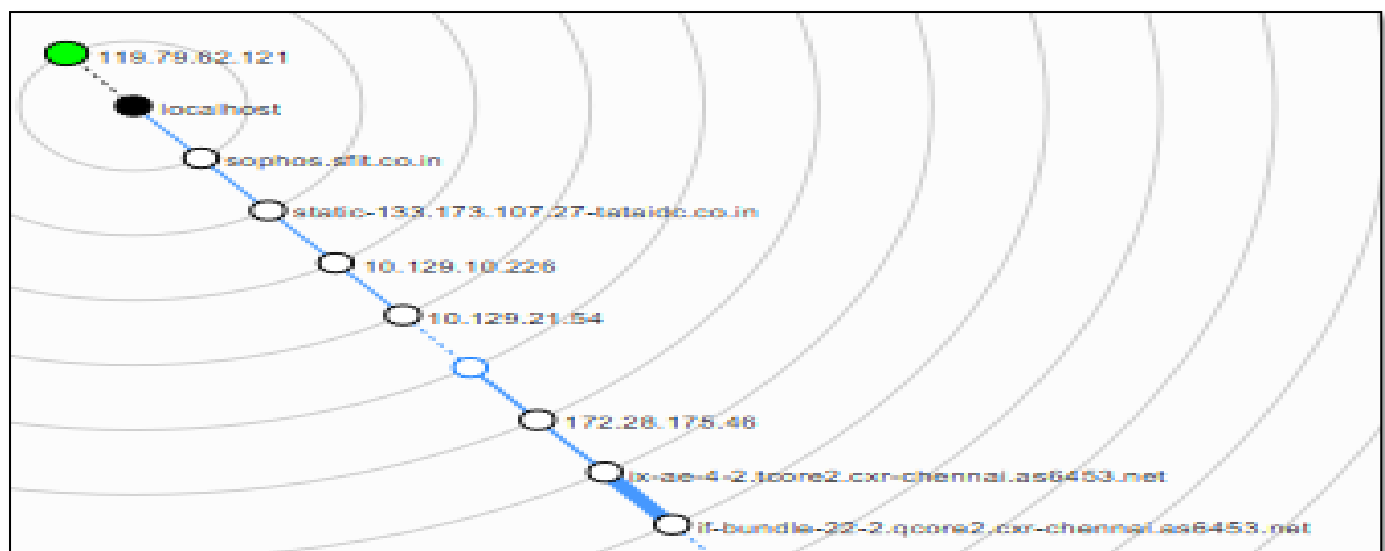


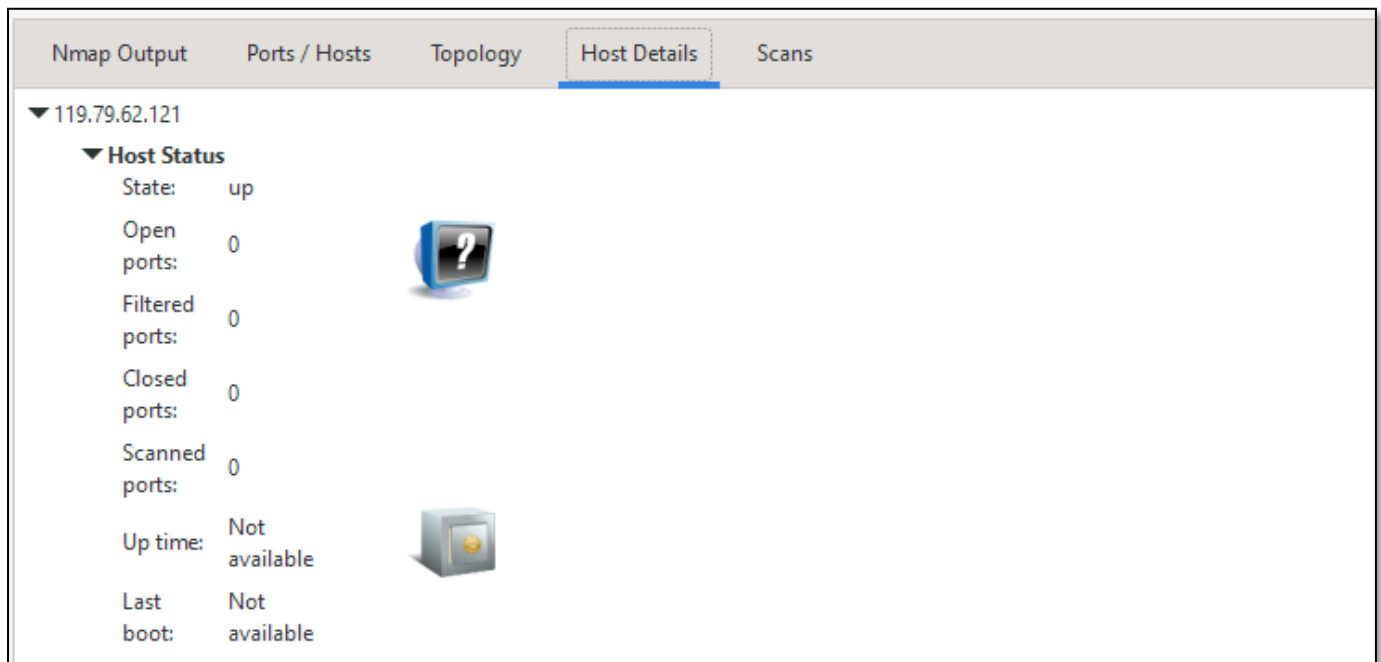

The screenshot shows the 'Host Details' tab for the IP address 119.79.62.121. The host status is 'up'. The following table summarizes the port scan results:

Category	Count
Open ports	0
Filtered ports	0
Closed ports	0
Scanned ports	0

Additional information: Up time: Not available, Last boot: Not available. The interface includes icons for a computer with a question mark and a server rack.

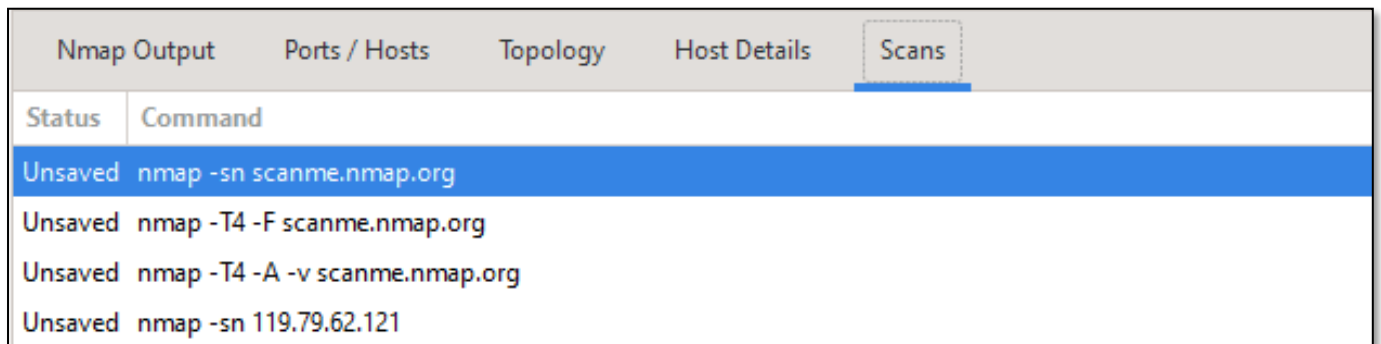

The screenshot shows the 'Scans' tab with a list of scan commands. The first command is highlighted in blue.

Status	Command
Unsaved	nmap -sn scanme.nmap.org
Unsaved	nmap -T4 -F scanme.nmap.org
Unsaved	nmap -T4 -A -v scanme.nmap.org
Unsaved	nmap -sn 119.79.62.121

Observation:

- **Nmap Output:** The Nmap output shows the target IP **119.79.62.121** as up, indicating that the SFIT host is reachable.
- **Ports/Hosts:** The Ports/Hosts section shows **no ports listed**, as no port information is obtained from the Ping Scan.
- **Topology:** The topology view shows **119.79.62.121** connected to localhost and displays the intermediate network path through several hops.
- **Host Details:** The Host Details section shows the host as **up**, with **0 open ports, 0 filtered ports, 0 closed ports, and 0 scanned ports**; uptime and last boot information are unavailable.
- **Scans:** The Scans section lists the Ping Scan command for **119.79.62.121** along with the earlier scans performed on scanme.nmap.org.

❖ Quick Scan (sfit.ac.in)

Target: 119.79.62.121 Profile: Quick scan

Command: nmap -T4 -F 119.79.62.121

Hosts Services

OS	Host
scanme.nmap.org	119.79.62.121


Nmap Output

```
nmap -T4 -F 119.79.62.121

Starting Nmap 7.95 ( https://nmap.org ) at 2026-10-03 12:52 India Standard Time
Nmap scan report for 119.79.62.121
Host is up (0.0018s latency).
Not shown: 98 filtered tcp ports (no-response)
PORT      STATE SERVICE
80/tcp    open  http
443/tcp   open  https

Nmap done: 1 IP address (1 host up) scanned in 15.02 seconds
```

Nmap Output	Ports / Hosts	Topology	Host Details	Scans
Port	Protocol	State	Service	Version
80	tcp	open	http	
443	tcp	open	https	

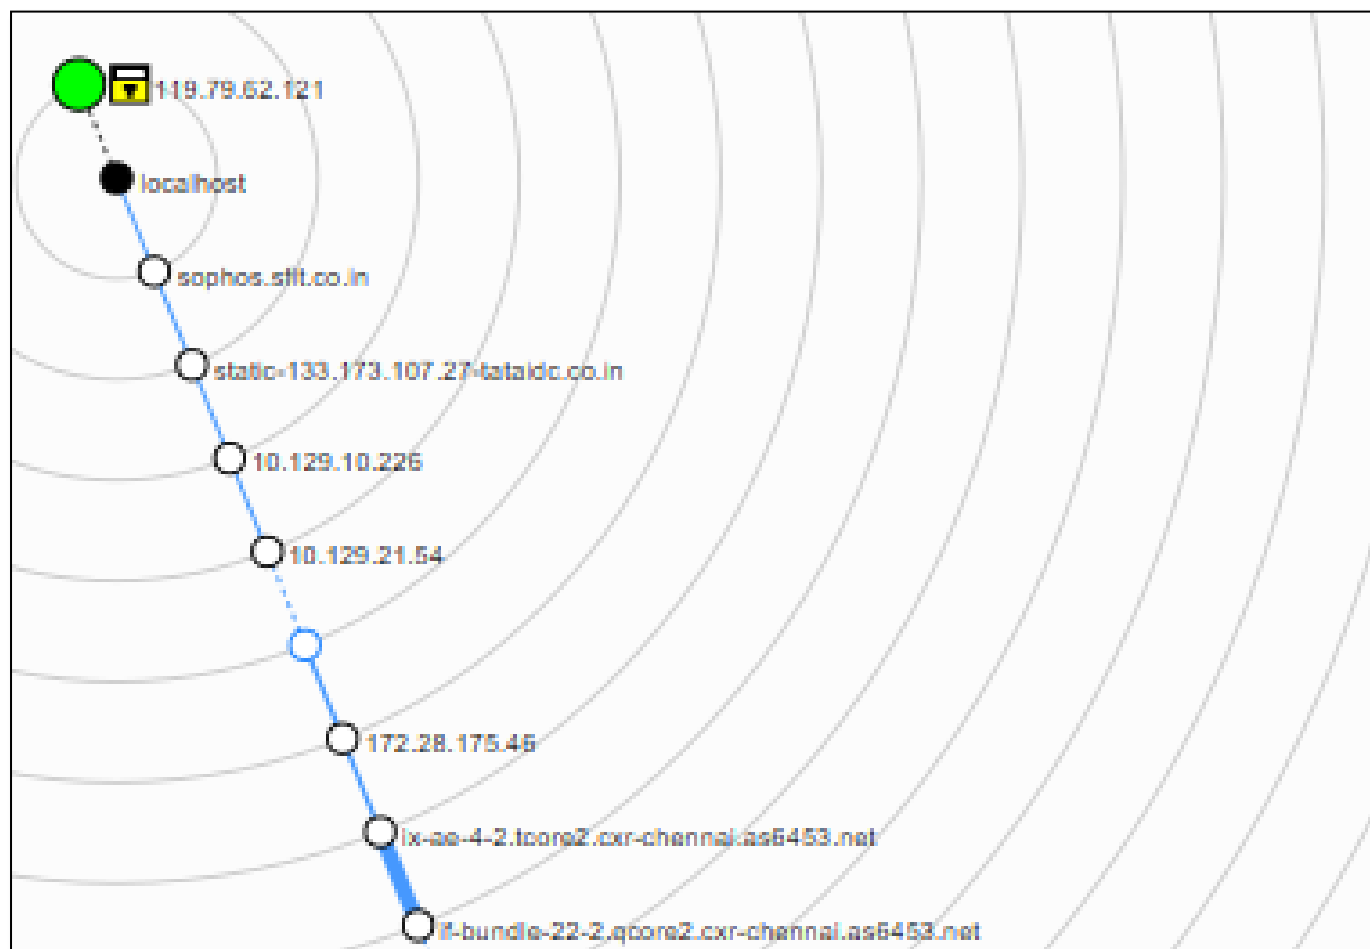

Nmap Output	Ports / Hosts	Topology	Host Details	Scans
▼ 119.79.62.121				
▼ Host Status				
State:	up			
Open ports:	2			
Filtered ports:	98			
Closed ports:	0			
Scanned ports:	100			
Up time:	Not available			
Last boot:	Not available			

Nmap Output	Ports / Hosts	Topology	Host Details	Scans
Status	Command			
Unsaved	nmap -sn scanme.nmap.org			
Unsaved	nmap -T4 -F scanme.nmap.org			
Unsaved	nmap -T4 -A -v scanme.nmap.org			
Unsaved	nmap -sn 119.79.62.121			
Unsaved	nmap -T4 -F 119.79.62.121			
Unsaved	nmap -T4 -F 119.79.62.121			

Observation:

- **Nmap Output:** The Quick Scan shows **119.79.62.121** as up and identifies **80/tcp (HTTP)** and **443/tcp (HTTPS)** as open, while the remaining scanned ports are filtered.
- **Ports/Hosts:** The Ports/Hosts section lists **80/tcp (HTTP)** and **443/tcp (HTTPS)** as open.
- **Topology:** The topology view shows **119.79.62.121** connected to localhost with several intermediate network hops.
- **Host Details:** The Host Details section shows the host as **up**, with **2 open ports**, **98 filtered ports**, **0 closed ports**, and **100 scanned ports**; uptime and last boot information are unavailable.
- **Scans:** The Scans section lists the Quick Scan command for **119.79.62.121** along with the previously executed scans.

❖ Intense Scan (sfit.ac.in)

Target: 119.79.62.121 Profile: Intense scan

Command: nmap -T4 -A -v 119.79.62.121

Hosts Services

OS Host

scanme.nmap.org


119.79.62.121



Nmap Output Ports / Hosts Topology Host Details Scans

nmap -T4 -A -v 119.79.62.121

Starting Nmap 7.95 (<https://nmap.org>) at 2026-10-03 12:47 India Standard Time
NSE: Loaded 157 scripts for scanning.
NSE: Script Pre-scanning.
 Initiating NSE at 12:47
 Completed NSE at 12:47, 0.00s elapsed
 Initiating NSE at 12:47
 Completed NSE at 12:47, 0.00s elapsed
 Initiating NSE at 12:47
 Completed NSE at 12:47, 0.00s elapsed
 Initiating Ping Scan at 12:47
 Scanning 119.79.62.121 [4 ports]
 Completed Ping Scan at 12:47, 0.01s elapsed (1 total hosts)
 Initiating Parallel DNS resolution of 1 host. at 12:47

Nmap Output	Ports / Hosts	Topology	Host Details	Scans
Port	Protocol	State	Service	Version
80	tcp	open	http	
443	tcp	open	https	

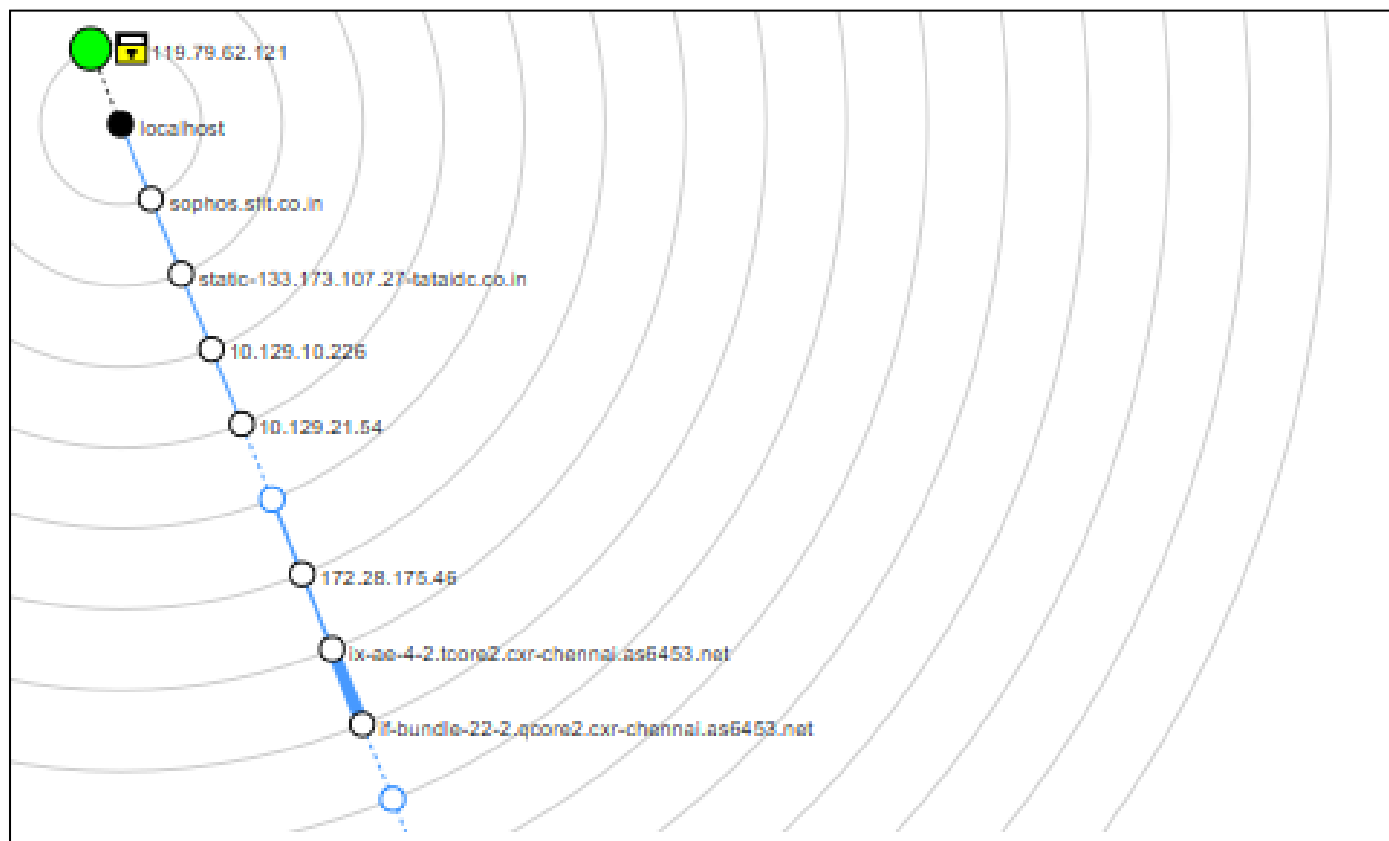

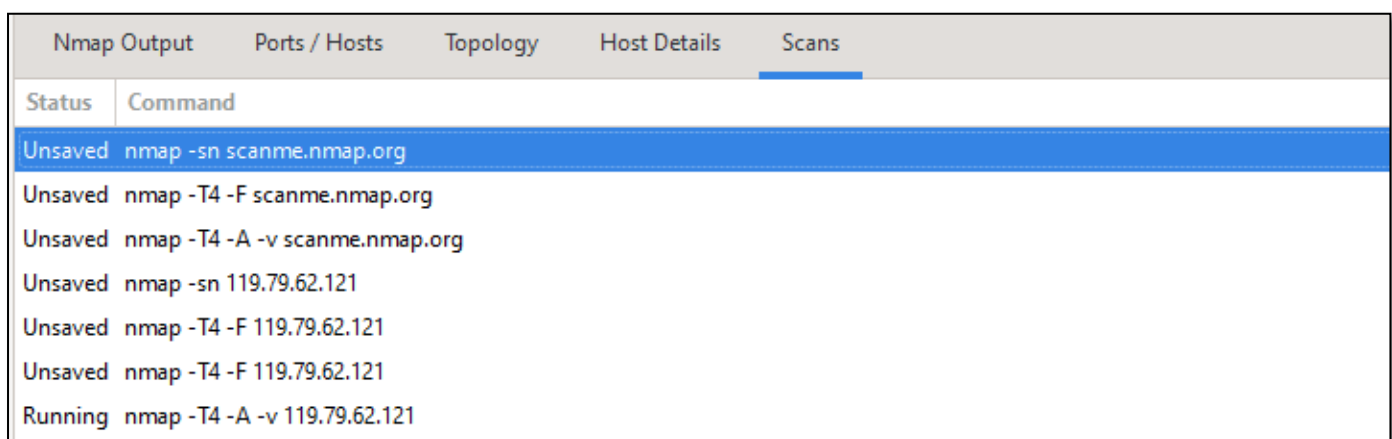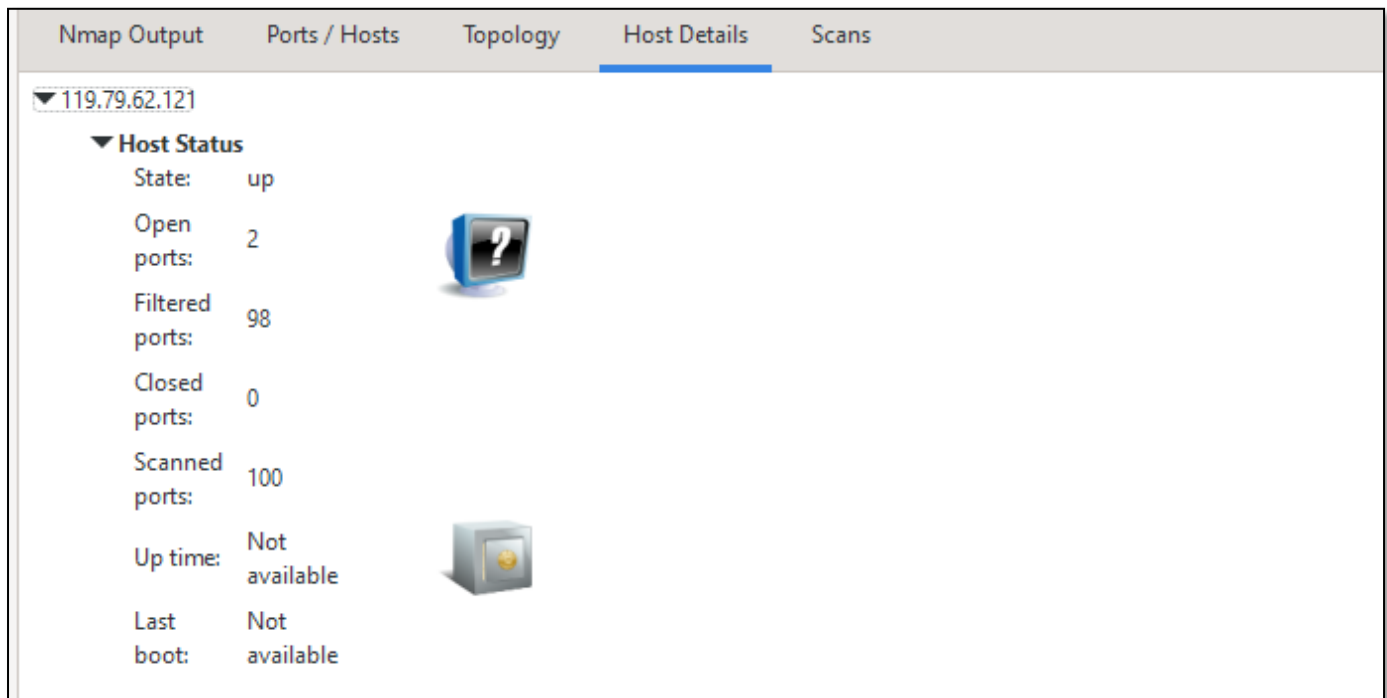

Observation:

- **Nmap Output:** The Intense Scan performs a detailed scan of **119.79.62.121** using the **-A** option and begins additional analysis such as port scanning, service detection, OS detection and network analysis.
- **Ports/Hosts:** The Ports/Hosts section shows **80/tcp (HTTP)** and **443/tcp (HTTPS)** as open.
- **Topology:** The topology view shows **119.79.62.121** connected to localhost through several intermediate hosts and network hops.
- **Host Details:** The Host Details section shows the host as **up**, with **2 open ports**, **98 filtered ports**, **0 closed ports**, and **100 scanned ports**; uptime and last boot information are unavailable.
- **Scans:** The Scans section records the Intense Scan command for **119.79.62.121** and shows the scan as **running** in the captured screenshot.