

CoreOps: Week 3 Module

Kubernetes Security & Platform Hardening

Objective: Master Kubernetes security fundamentals, pod-level & node-level isolation, RBAC correctness, secrets management, and supply-chain trust; the backbone of production-grade clusters.

WEDNESDAY: Service Accounts & Identity Basics

What You Should Understand Today

- What a ServiceAccount does
- Why workloads should not run as “default” SA
- What Workload Identity is

Key Outcomes

- You can assign a ServiceAccount to a deployment
 - You know why static cloud keys should not be inside pods
 - You understand identity → permission mapping at a high level
-

WHAT TO PRACTICE

Lab 1: Create a Custom ServiceAccount

Attach it to a deployment.

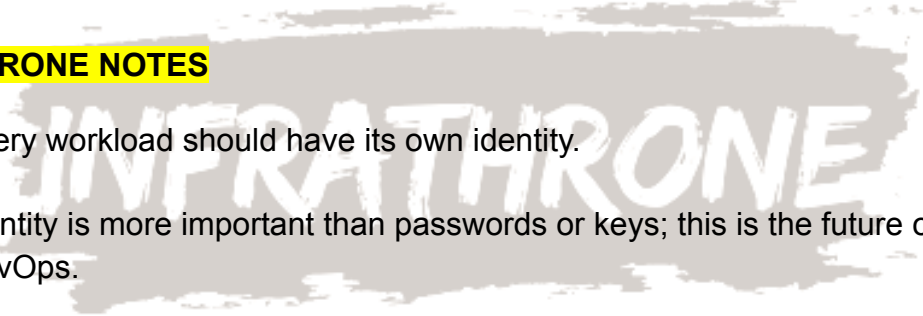
Lab 2: Remove Default Permissions

Ensure workloads run with minimal privileges.

WHERE TO STUDY

- ServiceAccounts docs
 - Basic identity diagrams on YouTube
-

INFRATHRONE NOTES

- Every workload should have its own identity.
 - Identity is more important than passwords or keys; this is the future of DevOps.
- 
- The logo for 'Infrathrone' is a large, stylized, light gray watermark in the background of the notes section. It features the word 'INFRATHRONE' in a bold, sans-serif font, with a horizontal line through the middle of the letters. Below the main text, the words 'THE DEVOPS WAR ROOM' are written in a smaller, all-caps, sans-serif font.
-

THE DEVOPS WAR ROOM