

1. Wikipedia URL components

For the URL <https://www.wikipedia.org/>:


- **Protocol:** **HTTPS** — the secure protocol used to transfer data between the browser and website.
- **Domain name:** **wikipedia**
- **Top-level domain (TLD):** **.org**


So the structure is:

https:// + **wikipedia** + **.org**

2. Browser–DNS–Web Server interaction

User types `www.zomato.com`

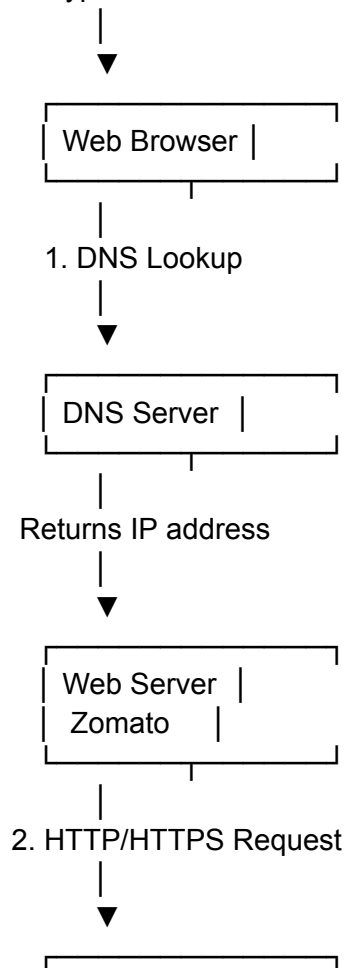

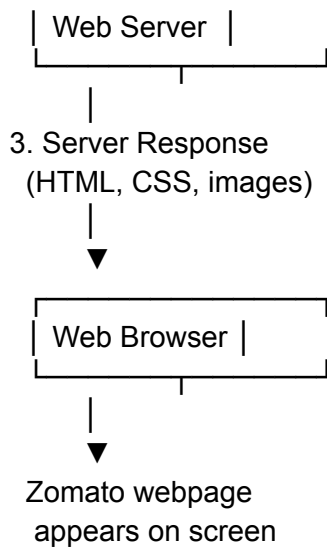

In simple words: The browser first uses **DNS** to find the server's IP address. It then sends an **HTTPS request** to that server, which sends the webpage data back to the browser for display.

3. Five popular websites and their types

Website	Type	Reason
Instagram	Web application	Users can log in, post, message, like, comment, and interact dynamically.
Flipkart	Web application	Provides interactive shopping, accounts, payments, orders, and personalized recommendations.
IRCTC	Web application	Users can search trains, book tickets, make payments, and manage bookings.
Wikipedia	Dynamic website	Pages are generated from a large database and can be edited and updated.
Zomato	Web application	Users can search restaurants, order food, make payments, and track orders.

Note: The distinction isn't always absolute. Modern websites often combine static content, dynamically generated pages, and web-application features.

4. HTTP vs HTTPS

HTTP (HyperText Transfer Protocol) sends information between a browser and web server without encryption. Data transferred over a normal HTTP connection can potentially be intercepted.

HTTPS (HyperText Transfer Protocol Secure) adds encryption using TLS, helping protect information such as passwords and payment details while it travels between the browser and server.

Real example: When you visit **Zomato** at <https://www.zomato.com>, the browser shows a **padlock/security indicator** because the connection uses HTTPS.

Simple difference:



HTTP → connection is not encrypted



HTTPS → connection is encrypted and authenticated.