


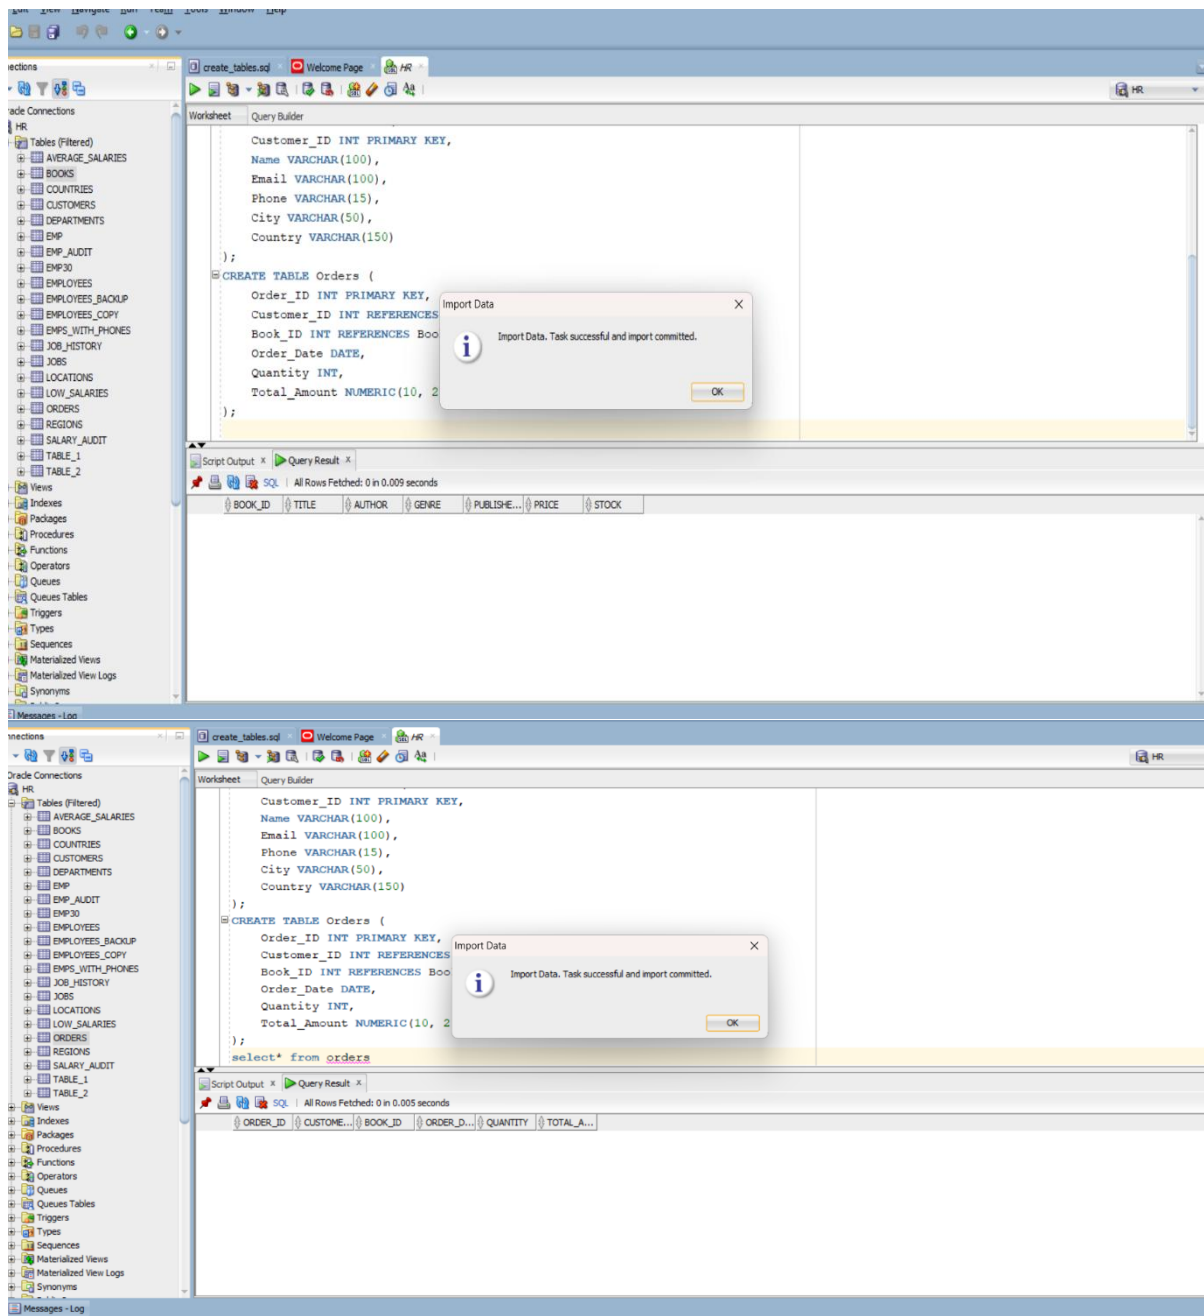

Oracle SQL Developer interface showing a SQL script in the Worksheet pane. The script defines tables for a book store database, including Customers and Orders. An "Import Data" dialog box is displayed, indicating a successful import.

Worksheet

```
Published_Year INT,  
Price NUMERIC(10, 2),  
Stock INT  
);  
  
CREATE TABLE Customers (  
  Customer_ID INT PRIMARY KEY,  
  Name VARCHAR(100),  
  Email VARCHAR(100),  
  Phone VARCHAR(15),  
  City VARCHAR(50),  
  Country VARCHAR(150)  
);  
  
CREATE TABLE Orders (  
  Order_ID INT PRIMARY KEY,  
  Customer_ID INT REFERENCES Customers (Customer_ID),  
  Book_ID INT REFERENCES Books (Book_ID),
```

Import Data

Import Data. Task successful and import committed.

OK

Script Output

SQL | All Rows Fetched: 0 in 0.009 seconds

BOOK_ID	TITLE	AUTHOR	GENRE	PUBLISHE...	PRICE	STOCK
---------	-------	--------	-------	-------------	-------	-------

29°C