AGILE DEVELOPMENT LAB FAT

NAME: SHIVANI M NAIR

REG NO:23MIS0108

QUESTION:

```
git push -u origin main
```

```
git push -u origin main
```


2. For the Web application automate the continuous integration and deployment process using Jenkins. 🕐 Write the code in Visual Studio and push it to your GITHUB repository. 🕐 Modify the code and commit the updates back in GITHUB. 🕐 Using Jenkins configure the job as pipeline and create the stages for the Continuous Integration process. 🕐 Checkout GITHUB 🕐 Build using Maven 🕐 Create Docker image 🕐 Push to Docker Hub 🕐 Create Cluster in Kubernetec and Deploy
a. The student degree certificate with all affiliation details

STEP1: WRITE THE HTML CODE AND PUSH IT TO GITHUB

CODE:
GIT HUB LINK: https://github.com/shivanimnair28-arch/html_jenkin.git

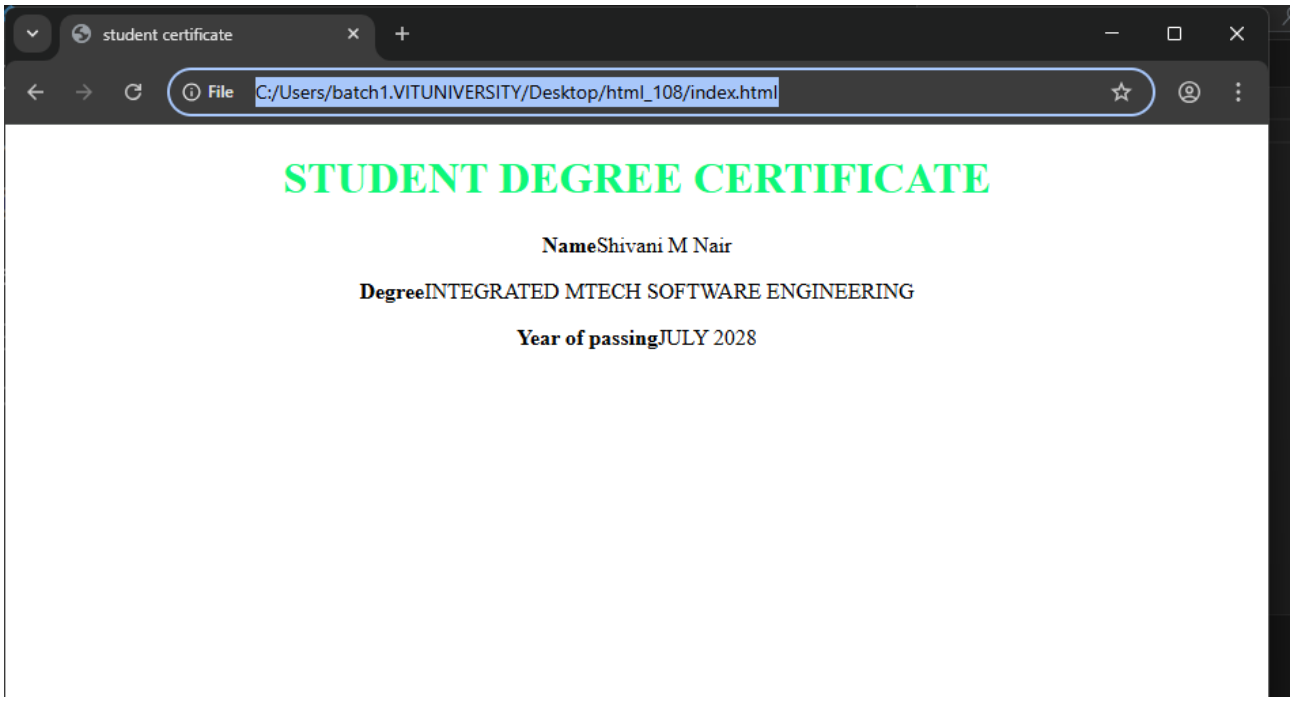

```
Show welcome page on startup

OUTPUT    DEBUG CONSOLE    TERMINAL                                   JavaSE-21 L

your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 3 files changed, 58 insertions(+)
 create mode 100644 Dockerfile
 create mode 100644 deployment.yaml
 create mode 100644 index.html

C:\Users\batch1.VITUNIVERSITY\Desktop\html_108>git branch -M main

C:\Users\batch1.VITUNIVERSITY\Desktop\html_108>git remote add origin https://github.com/shivanimnair28-arch/htmla.git

C:\Users\batch1.VITUNIVERSITY\Desktop\html_108>git push -u origin main
info: please complete authentication in your browser...
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 20 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (5/5), 872 bytes | 872.00 KiB/s, done.
Total 5 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/shivanimnair28-arch/htmla.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

STEP2: CREATE THE JENKINS AND WRITE PIPELINE SCRIPT

Jenkins / HTML_108 / Configuration

Configure

- General
- Office 365 Connector / Power Automate workflows
- Triggers
- Pipeline
- Advanced

Trigger builds remotely (e.g., from scripts) ?

Pipeline

Define your Pipeline using Groovy directly or pull it from source control.

Definition

Pipeline script

Script ?

```
pipeline {
    agent any

    environment {
        DOCKER_IMAGE = "shivanimnair28/html-demo:latest"
    }

    stages {

        stage('Clone Code') {
            steps {
                git branch: 'main',
                url: 'https://github.com/shivanimnair28-arch/html_jenkin.git'
            }
        }
```

Use Groovy Sandbox ?

Pipeline Syntax

Save Apply

STEP3: BUILD THE PIPELINE

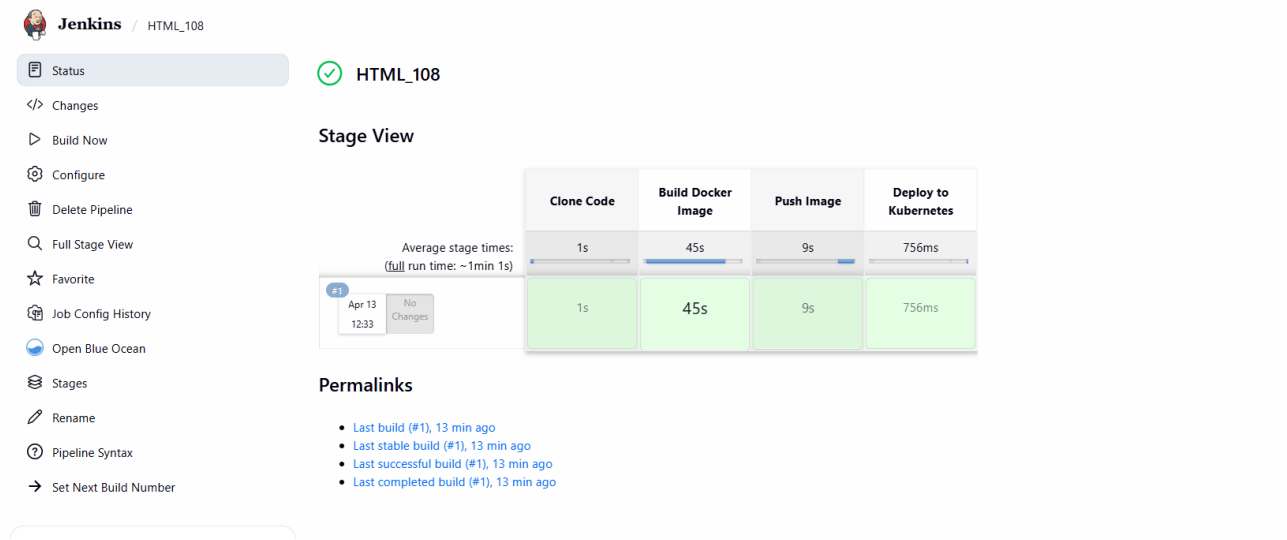

STEP4: CONSOLE OUTPUT

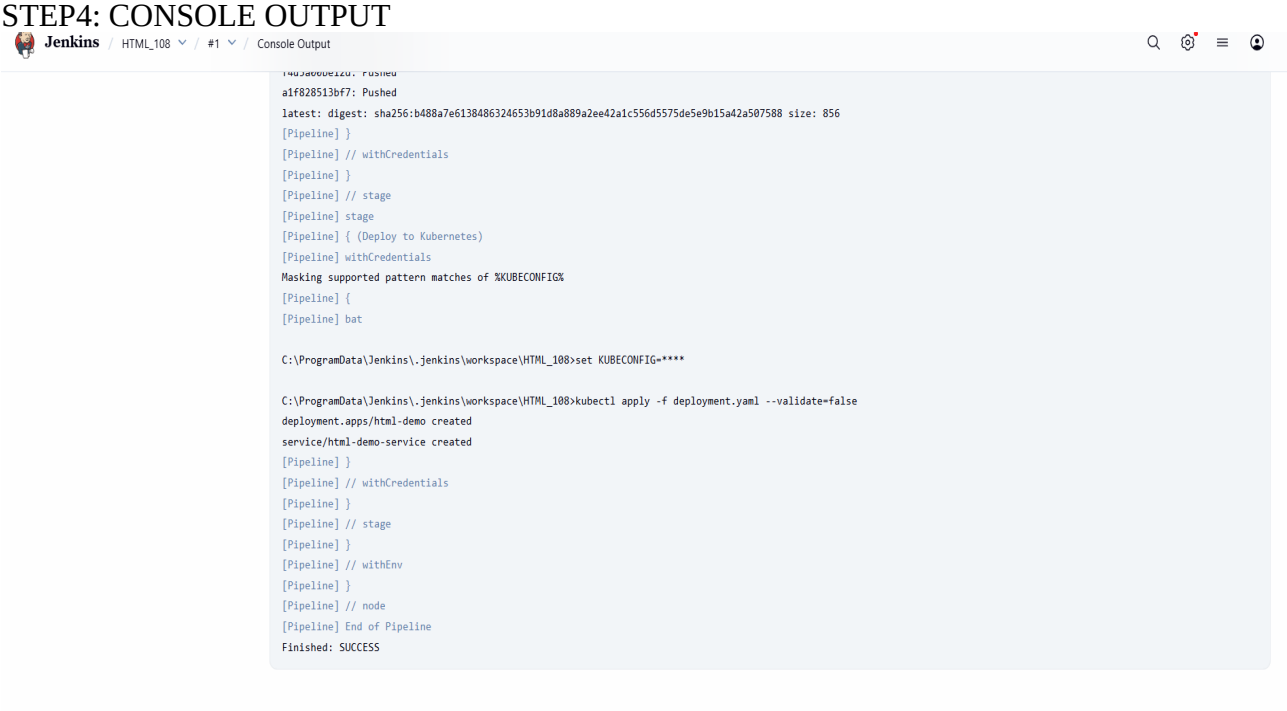

STEP5: DOCKER IMAGE

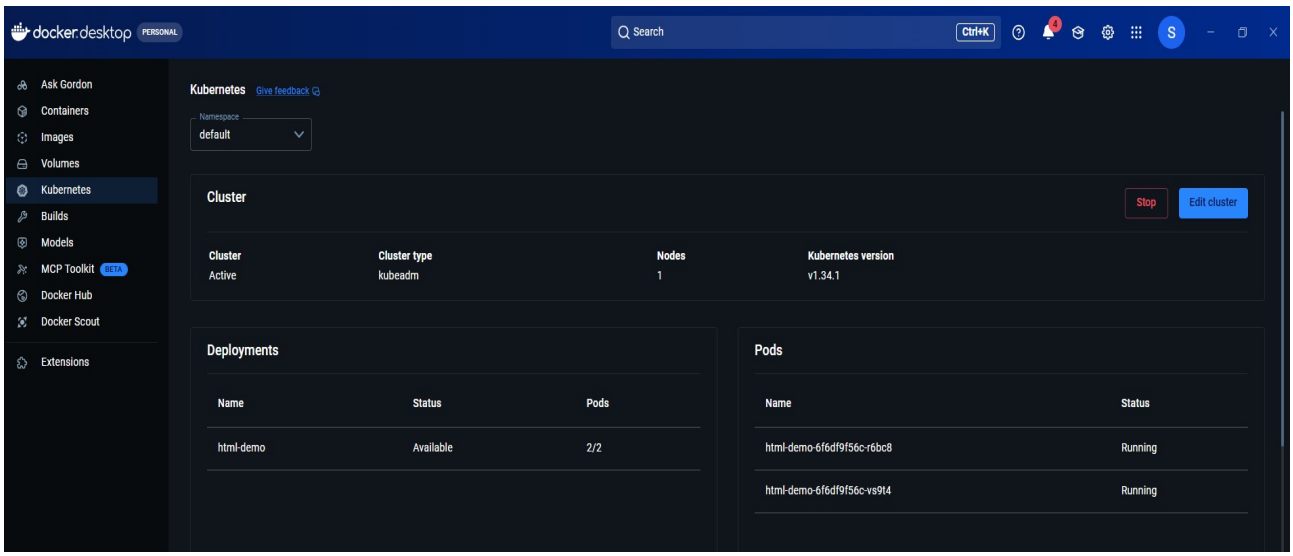

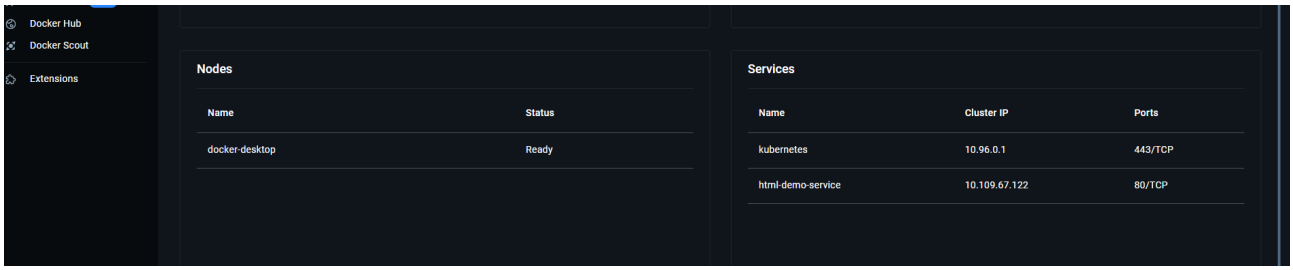

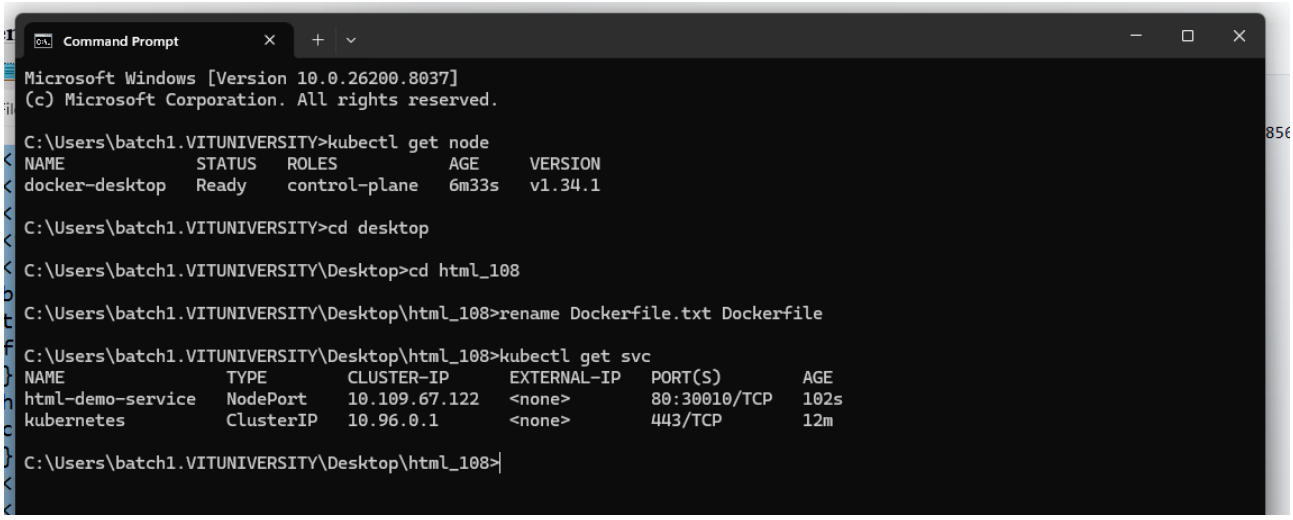

STEP 6: CONTAINER

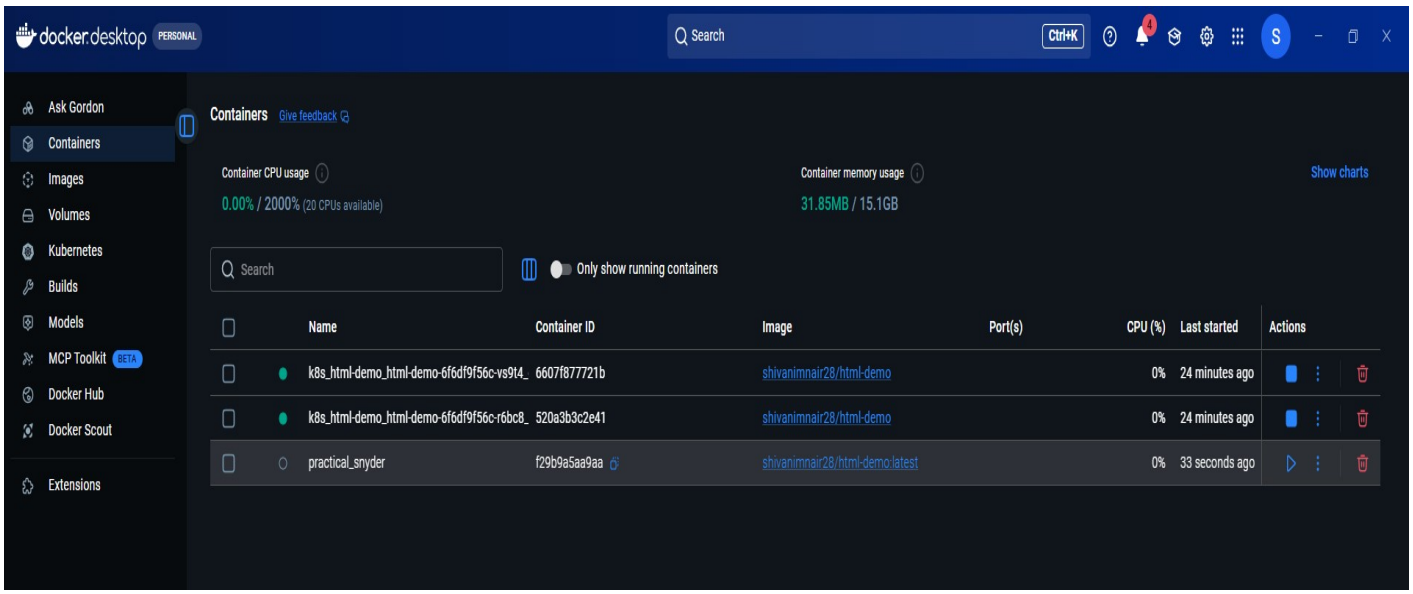
docker desktop PERSONAL
Search
Ctrl+K
Ask Gordon
Containers
Images
Volumes
Kubernetes
Builds
Models
MCP Toolkit BETA
Docker Hub
Docker Scout
Extensions
Containers Give feedback
Container CPU usage
0.00% / 2000% (20 CPUs available)
Container memory usage
31.85MB / 15.1GB
Show charts
Search
Only show running containers
Name
Container ID
Image
Port(s)
CPU (%)
Last started
Actions
k8s_html-demo_html-demo-6f6df9f56c-vs9t4_ 6607f877721b shivanimnair28/html-demo 0% 24 minutes ago
k8s_html-demo_html-demo-6f6df9f56c-r6bc8_ 520a3b3c2e41 shivanimnair28/html-demo 0% 24 minutes ago
practical_snyder f29b9a5aa9aa shivanimnair28/html-demo:latest 0% 33 seconds ago