

# DBMS LAB ASSIGNMENT


NAME:

Ch.Shivathmika

REG.NO:

19BCS055

- 1.) Show how to Create and Drop Database.

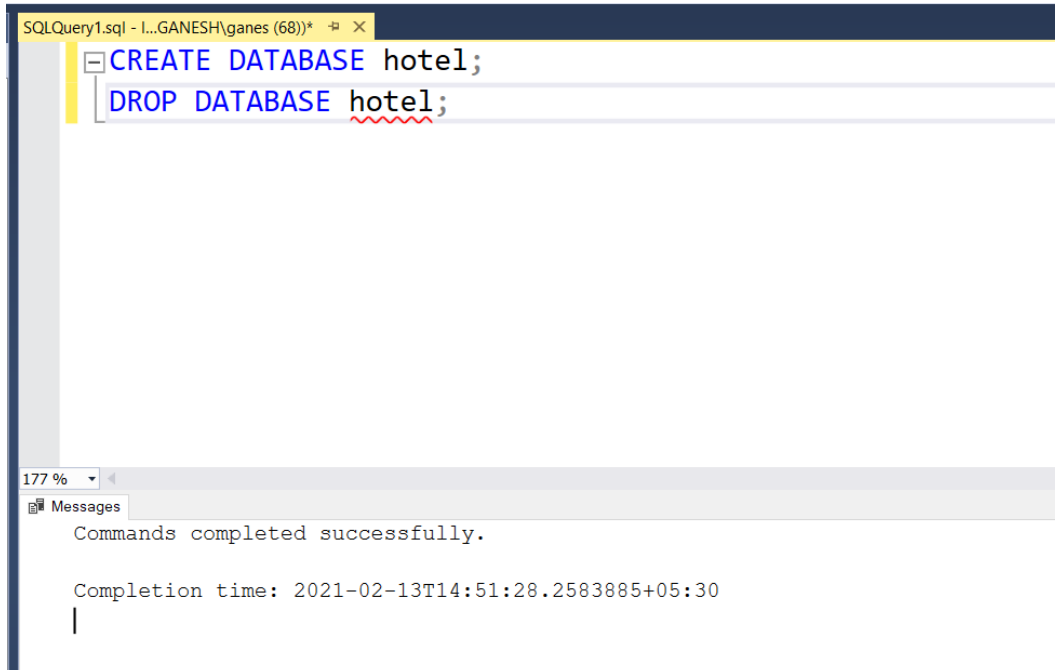A screenshot of a SQL query editor window titled "SQLQuery1.sql - I...GANESH\ganes (68))". The editor contains two lines of SQL code: "CREATE DATABASE hotel;" and "DROP DATABASE hotel;". The word "hotel" in the second line is underlined with a red wavy line. Below the editor, a "Messages" pane shows the output: "Commands completed successfully." and "Completion time: 2021-02-13T14:51:28.2583885+05:30". The zoom level is set to 177%.

```
SQLQuery1.sql - I...GANESH\ganes (68))  
CREATE DATABASE hotel;  
DROP DATABASE hotel;  
  
177 %  
Messages  
Commands completed successfully.  
Completion time: 2021-02-13T14:51:28.2583885+05:30  
|
```

- 2.) Show all the Databases are in the system.

SQLQuery2.sql - I...GANESH\ganes (64))\* SQLQuery1.sql - I...GANESH\ganes (68))\*

```
SELECT * FROM sys.databases WHERE database_id>0;
```

177 %

Results Messages

	name	database_id	source_database_id	owner_sid	create_date	compatibility_level	collation_name	user_access	user_access_desc	is_read_only	is_auto_close_on	is_auto_shrink_on	state	state_desc	is_in_standby
1	master	1	NULL	0x01	2003-04-08 09:13:36.390	150	SQL_Latin1_General_CP1_CI_AS	0	MULTI_USER	0	0	0	0	ONLINE	0
2	tempdb	2	NULL	0x01	2021-02-12 08:41:11.330	150	SQL_Latin1_General_CP1_CI_AS	0	MULTI_USER	0	0	0	0	ONLINE	0
3	model	3	NULL	0x01	2003-04-08 09:13:36.390	150	SQL_Latin1_General_CP1_CI_AS	0	MULTI_USER	0	0	0	0	ONLINE	0
4	msdb	4	NULL	0x01	2019-09-24 14:21:42.270	150	SQL_Latin1_General_CP1_CI_AS	0	MULTI_USER	0	0	0	0	ONLINE	0

3.) Create a Table for your Database.

SQLQuery3.sql - I...GANESH\ganes (65))\* SQLQuery2.sql - I...GANESH\ganes (64))\* SQLQ

```
CREATE TABLE customer(
    ID int primary key not null,
    Name varchar(45) not null,
    Phnno varchar(10) not null,
    Roomno varchar(10) not null,
    address varchar(20) not null
);
```

177 %

Messages

Commands completed successfully.

Completion time: 2021-02-13T15:16:17.1057602+05:30

4.) Drop table.

```
SQLQuery4.sql - I...GANESH\ganes (66))* SQLQuery3.sql - I...GANESH\ganes (65))* SQL
CREATE TABLE stock(
  ID int primary key not null,
  state varchar(10) not null
);
DROP TABLE stock;
```

177 %

Messages

Commands completed successfully.

Completion time: 2021-02-13T15:21:25.7435959+05:30

5.) Show how to check the schema of the tables.

```
SQLQuery6.sql - I...GANESH\ganes (67)) SQLQuery5.sql - I...GANESH\ganes (51))* SQLQuery4.sql - I...GANESH\ganes (66))*
sp_help customer;
```

177 %

Results Messages

Name	Owner	Type	Created_datetime
customer	dbo	user table	2021-02-13 15:16:16.903

Column_name	Type	Computed	Length	Prec	Scale	Nullable	TrimTrailingBlanks	FixedLenNullInSource	Collation
ID	int	no	4	10	0	no	(n/a)	(n/a)	NULL
Name	varchar	no	45			no	no	no	SQL_Latin1_General_CP1_CI_AS
Phnno	varchar	no	10			no	no	no	SQL_Latin1_General_CP1_CI_AS
Roomno	varchar	no	10			no	no	no	SQL_Latin1_General_CP1_CI_AS
address	varchar	no	20			no	no	no	SQL_Latin1_General_CP1_CI_AS

Identity	Seed	Increment	Not For Replication
No identity column defined.	NULL	NULL	NULL

RowGuidCol
No rowguidcol column defined.

Data located on filegroup
PRIMARY

index_name	index_description	index_keys
PK_customer_3214EC278680631C	clustered, unique, primary key located on PRIMARY	ID

constraint_type	constraint_name	delete_action	update_action	status_enabled	status_for_replication	constraint_keys
PRIMARY KEY (clustered)	PK_customer_3214EC278680631C	(n/a)	(n/a)	(n/a)	(n/a)	ID

6.) Show all the tables from the database.

SQLQuery6.sql - I...GANESH\ganes (67))\* SQLQuery5.sql - I...GANESH\ganes (51))\* SQLQuery4.sql - I...GANESH\ganes (66))\*

```
SELECT * FROM SYSOBJECTS WHERE xtype='u';
```

177 %

Results Messages

	name	id	xtype	uid	info	status	base_schema_ver	replinfo	parent_obj	crdate	ftcatid	schema_ver
1	trace_xe_action_map	-463397375	U	4	0	0	0	0	0	2019-09-24 14:20:12.640	0	0
2	trace_xe_event_map	-319884821	U	4	0	0	0	0	0	2019-09-24 14:20:12.560	0	0
3	spt_fallback_db	117575457	U	1	0	0	0	0	0	2003-04-08 09:18:01.557	0	0
4	spt_fallback_dev	133575514	U	1	0	0	0	0	0	2003-04-08 09:18:02.870	0	0
5	spt_fallback_usg	149575571	U	1	0	0	0	0	0	2003-04-08 09:18:04.180	0	0
6	customer	279672044	U	1	0	0	0	0	0	2021-02-13 15:16:16.903	0	0
7	spt_monitor	1803153469	U	1	0	0	0	0	0	2019-09-24 14:21:40.837	0	0
8	MSreplication_options	2107154552	U	1	0	0	0	0	0	2019-09-24 14:22:51.377	0	0

7.) Create Table using Select Statement.

SQLQuery7.sql - I...GANESH\ganes (74))\* SQLQuery6.sql - I...GANESH\ganes (67))\* SQLQuery5.sql - I...GANESH\ganes (51))\*

```
SELECT ID, Phnno, Roomno INTO details FROM customer;
```


177 %

Messages

(0 rows affected)

Completion time: 2021-02-13T15:34:12.4201952+05:30

- 8.) Create a table which has derived attribute.

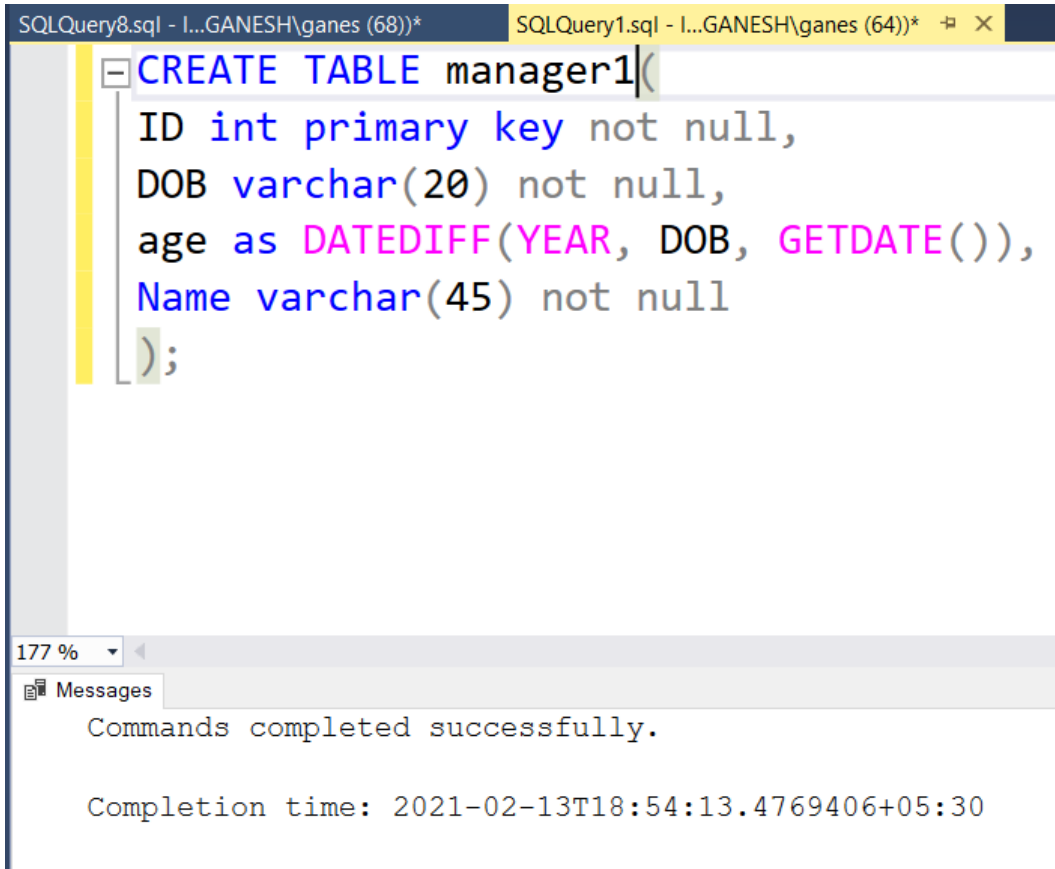

The screenshot shows a SQL Server Enterprise Manager interface. At the top, there are two tabs: 'SQLQuery8.sql - I...GANESH\ganes (68))\*' and 'SQLQuery1.sql - I...GANESH\ganes (64))\*'. The active tab displays the following SQL command:

```
CREATE TABLE manager1(  
    ID int primary key not null,  
    DOB varchar(20) not null,  
    age as DATEDIFF(YEAR, DOB, GETDATE()),  
    Name varchar(45) not null  
);
```

Below the query editor, there is a 'Messages' pane showing the execution results:

```
Commands completed successfully.  
  
Completion time: 2021-02-13T18:54:13.4769406+05:30
```