

API end point :

<https://api.groq.com/openai/v1/audio/speech>

The screenshot displays a REST client interface with the following details:

- URL:** `https://api.groq.com/openai/v1/audio/speech`
- Method:** `POST`
- Body (JSON):**

```
1 {
2   "model": "canopylabs/orpheus-v1-english",
3   "input": "Welcome to the Groq API tutorial Shivesh. This is text-to-speech on Groq.",
4   "voice": "troy",
5   "response_format": "wav"
6 }
```
- Status:** `200 OK` (1.07 s, 285.8 KB)
- Response:** A black rectangular area representing the audio output, with a playback control bar showing `0:00 / 0:06`.
- Right Panel:** Includes a 'New Chat' section and a list of actions: 'Lock Groq model response schema', 'Stabilize S01 audio request', and 'Generate Swagger-based test cases'. Below these is a text input field with the placeholder 'Describe what you need. Press @ for context, / for Skills.' and an 'Auto' dropdown menu.
- Bottom Bar:** Shows system information including 'ENG IN', signal strength, and the date '18-06-2026'.

API end point :

<https://api.groq.com/openai/v1/chat/completions>

The screenshot displays a REST client interface with a POST request to `https://api.groq.com/openai/v1/chat/completions`. The request body is a JSON object with the following structure:


```
1 {
2   "model": "llama-3.3-70b-versatile",
3   "messages": [
4     { "role": "system", "content": "You are a helpful assistant." },
5     { "role": "user", "content": "Explain REST APIs in 3 sentences." }
6   ],
7   "temperature": 0.7,
8   "max_completion_tokens": 1024
9 }
```

The response is a 200 OK status with a response time of 945 ms and a body size of 1.63 KB. The response body is a JSON object:

```
1 {
2   "id": "chatcmpl-69f18a1c-ff38-4f55-939f-a08be9a8cb99",
3   "object": "chat.completion",
4   "created": 1781769467,
5   "model": "llama-3.3-70b-versatile",
6   "choices": [
7     {
8       "index": 0,
9       "message": {
10        "role": "assistant",
11        "content": "A REST (Representational State of Resource) API is an architectural style for designing networked applications, based on the idea of resources that are identified by URIs, and can be manipulated using a fixed set of operations. REST APIs typically use"
12      }
13     }
14   ]
15 }
```

On the right side, there is a 'New Chat' panel with a text input field containing the prompt: 'Describe what you need. Press @ for context, / for Skills.' Below the input field is an 'Auto' button.

<https://api.groq.com/openai/v1/chat/completions>

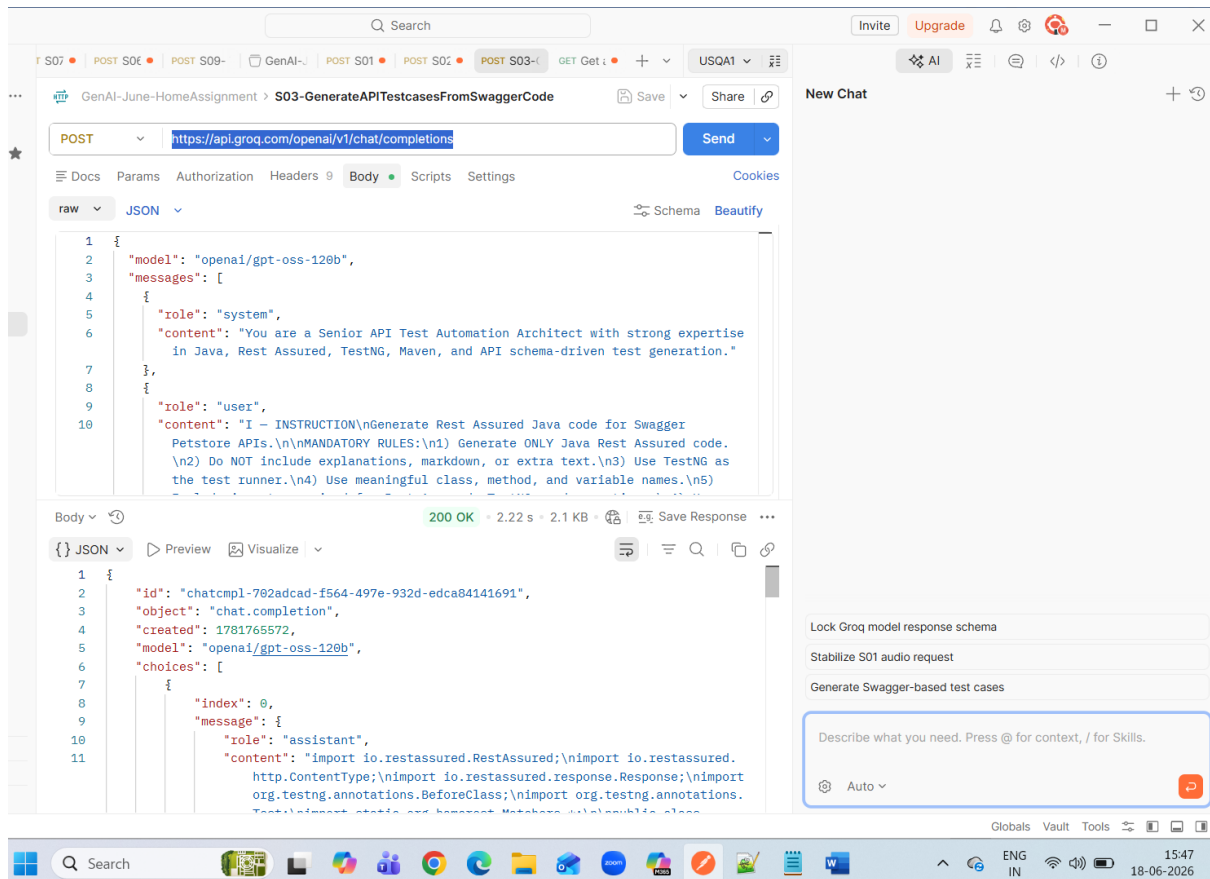

Additional – Get method to list all AI models-

API end point : <https://api.groq.com/openai/v1/models>

The screenshot shows the Postman interface with a GET request to `https://api.groq.com/openai/v1/models`. The response is a 200 OK status with a 355 ms response time and 1.32 KB of data. The response body is in JSON format, showing a list of models. The first model in the list is `openai/gpt-oss-120b`.

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body

```
{
  "object": "list",
  "data": [
    {
      "id": "openai/gpt-oss-120b",
      "object": "model",
      "created": 1754408224,
      "owned_by": "OpenAI",
      "active": true,
      "context_window": 131072,
      "public_apps": null,
      "max_completion_tokens": 65536
    }
  ]
}
```

Lock Groq model response schema
Stabilize S01 audio request
Generate Swagger-based test cases

Describe what you need. Press @ for context, / for Skills.

Auto