

# Approximating All-Pairs Similarity Search by Rademacher Average

Shiyu Ji  
shiyu@cs.ucsb.edu

## Abstract

All-pairs similarity search (APSS) has abundant applications in many fields such as collaborative filtering, recommendations, search query suggestions, spam detection, etc. This paper proposes two approximation algorithms for cosine similarity based APSS and SimRank based APSS respectively. We give the upper bounds of the approximation errors for the worst case by using Rademacher average. To the best of our knowledge, we are the first to apply Rademacher average to bound the errors in APSS approximation problems. We also evaluate our algorithms by experiments on real-world data sets to verify that our upper bounds are tight enough for practical use.

## 1 Introduction

All-pairs similarity search (APSS) has received extensive research interest recently [5, 45, 1, 39]. Collaborative filtering [37], similarity-based recommendations [32], search query suggestions [10], spam and plagiarism detection [12, 28] all find APSS useful in practice. However, it is time consuming to do an APSS since the time complexity grows quadratically with the problem scale [5, 1, 39]. To improve performance, many approximation approaches have been proposed [18, 15, 22, 13]. Hence the computation [5, 14, 45, 1, 39] and approximation [18, 15, 22, 13] of the all-pairs similarities have been popular in research for more than ten years.

This paper considers two approximation methods for cosine similarity based search [38, 45, 1, 39], and SimRank based search [23, 26, 16, 24] respectively. Our solution idea is to treat the cosine similarity or SimRank between two vectors as a true average over random variables, and then we can use sampled average to approximate the true average. We explain the details as follows:

- Cosine similarity between two vectors, each of which contains  $m$  features, is defined as

$$Sim(u, v) = \frac{1}{\|u\| \cdot \|v\|} \sum_{i=1}^m u_i \cdot v_i,$$

where  $\|\cdot\|$  denotes 2-norm and  $u_i$  is the  $i$ -th component (feature) value. If we normalize each vector to make their norms all equal to  $\sqrt{m}$ , then cosine similarity is just the true average of the  $m$  feature products between two vectors:

$$Sim(u, v) = \frac{1}{m} \sum_{i=1}^m u_i \cdot v_i.$$

Suppose  $m$  is large, e.g., over 1K. Then it is time consuming to traverse all the  $m$  feature pairs and do the multiplications. A straightforward method to approximate the true average is by using the sampled average

$$\widetilde{Sim}(u, v) = \frac{1}{|S|} \sum_{s_i \in S} u_{s_i} \cdot v_{s_i},$$

where  $S$  is the set of sampled features. That is, we can choose  $k$  out of  $m$  features at random, and compute the average of the  $k$  sampled feature products as an approximation of the cosine similarity.

Thanks to the recent advance in statistical learning theory (especially the results of Rademacher average), there are tight error bounds for this sampling method.

- SimRank between two nodes in the graph can be defined as

$$\text{SimRank}(a, b) = \sum_{t: (a, b) \rightsquigarrow (x, x)} P[t] \cdot c^{L(t)},$$

where  $t$  is a pair of random walks with the same length  $L(t)$ , which lead the starting nodes  $a$  and  $b$  to meet at one node  $x$ , and  $P[t]$  denotes the probability when  $t$  is chosen. Hence SimRank can be treated as the true average of the random variable  $c^{L(t)}$ , where  $t$  is taken over the space of all the pairs of random walks that start from the two nodes respectively. Thus similarly, we can sample over the random walk space and then use the sampled average as an approximation. Again, tight error bounds given by Rademacher average are also inherited.

The approximation error of each our algorithm can be upper bounded by using Rademacher average [4, 30, 3]. We can treat the similarity approximation as a learning problem over large scaled data set. In the analysis, we want to upper bound the approximation error for the worst case, i.e., to bound the maximum error  $\overline{E}$  among all pairs:

$$\overline{E} = \max_{u \neq v} |\widetilde{\text{Sim}}(u, v) - \text{Sim}(u, v)|.$$

Rademacher average does an excellent job on how to bound such maximum error [35, 36]. The key result we use in this paper is that with probability at least  $1 - \delta$ ,

$$\overline{E} \leq R + c \left( 1 + \sqrt{\frac{8}{k} \log \frac{2}{\delta}} + \sqrt{\frac{8}{k} \log \frac{2}{\delta} + \frac{8R}{c}} \right) \sqrt{\frac{\log \frac{8}{\delta}}{2k}},$$

where  $R$  denotes the Rademacher average of the data set, and  $k$  is the number of samples, and  $c$  is the number of features for cosine similarity, or the constant between 0 and 1 for SimRank. It is also possible to upper bound the Rademacher average by the state-of-art results [2, 35, 36]. Thus we can find an upper bound of the worst errors for our approximation algorithms.

**Our Contributions.** We are the first to give the approximation algorithms for APSS that can achieve upper bounds on maximum errors, and to show the upper bounds by using Rademacher average. We also evaluate our algorithms by using real-world data sets.

The rest of this paper is organized as follows. Section 2 discusses the related works. Section 3 introduces the problem settings and reviews some technical background. Section 4 approximates the cosine similarity based APSS and also gives the analysis on the upper bound of maximum errors. Section 5 approximates the SimRank based APSS and also gives an upper bound on maximum errors. Section 6 evaluates our algorithms and presents the experimental results. Section 7 concludes this paper and discusses some possible future works.

## 2 Related Works

All-pairs similarity search (APSS) is recently a popular research topic in the community of information retrieval [5, 45, 1, 39]. Given a big set of objects, the goal of APSS is to efficiently compute (or approximate) the similarities between each pair of objects. Many similarity measures have been proposed [38], e.g., Cosine Similarity [40], SimRank [23], Jaccard Index [19], Metric Distance [38], Pearson Correlation [6], etc. For similarity search, Cosine Similarity and SimRank are very popular ([40, 45, 1, 39] for Cosine, and [26, 16, 24, 46] for SimRank). A major challenge of APSS is the large volume of computation: given  $n$  objects, without any assumption on the similarity distribution (e.g., the similarity matrix is sparse), the time complexity is at least  $O(n^2)$ . To compute more efficiently, the state-of-art research works often use parallelism [11, 20] and dissimilarity detection [1, 39]. If only approximations are needed, how to efficiently

sample with negligible error for similarity search is another research focus [18, 15, 22, 13]. This paper focuses on the approximation problem.

We may treat the similarity approximation as a learning problem over large scaled data, and we need to upper bound the learning error for the worst case. In statistical learning theory, such upper bounds are usually called risk bounds [41]. There are two classical methods to compute the risk bounds: by VapnikChervonenkis (VC) dimension [42, 43, 41] and by Rademacher average [30, 4, 3]. Many approximation algorithms that use these two techniques have been proposed [33, 34, 35, 36]. Riondato and Kornaropoulos [33, 34] proposed algorithms that use VC dimension to upper bound the sample size that is sufficient to approximate the betweenness centralities [9] of all nodes in a graph with guaranteed error bounds. One limitation of the VC-based algorithms is that the upper bounds of some characteristic quantities (e.g., the maximum length of any shortest path) are needed [33, 34, 36]. But such bounds are not always available. One year later, Riondato and Upfal used Rademacher average to approximate the frequent itemsets [35] and betweenness centralities [36]. They also found that by using Rademacher average, we can avoid the aforementioned limitation of VC-based solutions. It has been proved that Rademacher average can be applied to various approximation problems, which are out of the scope of classical learning framework. This paper basically follows this idea. To the best of our knowledge, there is no research work connecting similarity approximation with Rademacher average. We attempt to fill this void.

### 3 Problem Formulation and Preliminaries

#### 3.1 Cosine Similarity

We consider the cosine similarity based all-pairs similarity search. Suppose there are  $n$  vectors (each vector can represent a user profile or a web page). Each vector contains  $m$  non-negative features. Define the cosine similarity between two vectors  $u$  and  $v$  as

$$Sim(u, v) = \frac{1}{\|u\| \cdot \|v\|} \sum_{i=1}^m u_i \cdot v_i,$$

where  $u_i, v_i$  denotes the  $i$ -th feature value of  $u, v$ . For simplicity, we assume all the vectors are adjusted with the same norm:  $\|v\| = \sqrt{m}$  for every  $v$  in the  $n$  vectors. Then the equation above can be simplified as

$$Sim(u, v) = \frac{1}{m} \sum_{i=1}^m u_i \cdot v_i.$$

That is, the similarity is defined as the average on the corresponding feature products between the vectors.

To do the all-pairs similarity search (APSS), we need to compute the similarity between each pair of vectors. Since there are  $n(n-1)$  pairs, and for each pair we need  $m$  times of multiplication, the total complexity of a naïve algorithm is  $O(n^2m)$ . Fortunately, there are many methods to detect dissimilar pairs (two vectors without sharing any feature) [1, 39, 27], which can save a lot of computation. For the state-of-art works, to compute all the pairs, the complexity can be lowered to  $O(nkm)$ , where  $k$  is much less than  $n$ . However, to the best of our knowledge, there were few discussions on the size of features  $m$ . If we can only consider a part of the  $m$  features without significantly deteriorating the accuracy, then the total computation time for APSS can be lowered significantly (note that  $nk$  is still large for very big dataset). We can approximating the similarity by sampling on the features.

#### 3.2 SimRank

SimRank [23] is a popular measure of the similarity between two nodes in a graph based on the idea that similar nodes are often referred by other similar nodes. Denote by  $s(a, b)$  the SimRank between nodes  $a$  and

b. If  $a = b$ , then  $s(a, b)$  is defined to be 1. Otherwise,

$$s(a, b) = \frac{c}{|I(a)| \cdot |I(b)|} \sum_{i \in I(a)} \sum_{j \in I(b)} s(i, j),$$

where  $c$  is a constant in  $(0, 1)$  and  $I(a)$  denotes the in-neighbors of  $a$ . If there is an edge from  $a$  to  $b$ , then  $a$  is an in-neighbor of  $b$ . An important fact is that SimRank can be equivalently built upon Random Surfer-Pairs Model [23]. That is,  $s(a, b)$  can also be written as follows:

$$s(a, b) = \sum_{t: (a, b) \rightsquigarrow (x, x)} P[t] \cdot c^{L(t)},$$

where  $t$  is a pair of random walks with the same number of steps, which lead  $a$  and  $b$  to meet at one node  $x$ , and  $P[t]$  denotes the probability when  $t$  is chosen, and  $L(t)$  denotes the number of steps of each walk in  $t$ . Here we take random walks from the reversed graph, in which each edge is reversed compared with the original graph. A random walk works as follows: in the tour at any node, which has  $k$  out-edges, we take one of the  $k$  edge with equal probability  $1/k$  as our next step. Note that as the length of random walk grows, its contribution to  $s(a, b)$  decreases exponentially. Hence in practice, we only need to consider relatively short walks, e.g., with length no more than  $T$ .

### 3.3 Rademacher Average

This section will review some key results related to Rademacher Average. Suppose we want to compute the cosine similarities between a fixed vector  $u$  and other vectors  $v_1, v_2, \dots, v_n$ . We take the  $m$  features as the sample space  $S$ :

$$S = \{s_1, \dots, s_k\} \subseteq D$$

where  $k$  is the number of samples we take, and  $D$  is the feature space:  $D = \{1, 2, \dots, m\}$ . Let  $F$  be a collection of functions from the features  $D$  to the interval  $[0, m]$ . For each function  $f \in F$ , define the *true average*  $A_D(f)$  and *sampled average*  $A_S(f)$  as follows:

$$A_D(f) = \frac{1}{m} \sum_{i=1}^m f(i), \quad A_S(f) = \frac{1}{k} \sum_{i=1}^k f(s_i).$$

Define the *uniform deviation* [31] of  $F$  given  $S$  as

$$U_S(F) = \sup_{f \in F} [A_S(f) - A_D(f)].$$

Note that if  $F$  is a finite set (in this paper we will see this is true), supreme can be replaced by maximum:

$$U_S(F) = \max_{f \in F} [A_S(f) - A_D(f)].$$

For the case when  $F$  is finite, we have the upper bound of the approximation error in the worst case as follows.

**Theorem 1.** If  $F$  is finite, then for any  $\delta > 0$ , with probability at least  $1 - \delta$ ,

$$\sup_{f \in F} |A_S(f) - A_D(f)| \leq m \sqrt{\frac{\log(2|F|) + \log(1/\delta)}{2k}}.$$

We leave the proof of Theorem 1 to the Appendix.

However if  $F$  is not necessarily infinite, the above bound cannot apply. We can use Rademacher average to deal with the general case. Define the *Rademacher average* [30, 4, 31] of  $F$  given  $S$  as

$$R_S(F) = \mathbb{E}_\sigma \left[ \sup_{f \in F} \frac{2}{k} \sum_{i=1}^k \sigma_i f(s_i) \right],$$

where each  $\sigma_i$  is a random variable uniformly distributed over  $\{-1, 1\}$ , and the mean  $\mathbb{E}_\sigma$  takes randomness over all the  $\sigma_i$ 's conditionally on  $S$ . Again, one can replace supreme by maximum if  $F$  is finite.

The main motivation of our algorithm is that the difference between true average and sampled average is upper bounded by the Rademacher average as follows. We leave the proofs to the Appendix.

**Theorem 2.** Let  $F$  be a collection of functions  $f$  mapping  $D$  to  $[0, m]$ . With probability at least  $1 - \delta$ , we have

$$\sup_{f \in F} |A_S(f) - A_D(f)| \leq R_S(F) + \left( m + m \sqrt{\frac{8}{k} \log \frac{2}{\delta}} + m \sqrt{\frac{8}{k} \log \frac{2}{\delta} + \frac{8R_S(F)}{m}} \right) \sqrt{\frac{\log \frac{8}{\delta}}{2k}}.$$

The remaining item we need to upper bound is  $R_S(F)$ . Our result is similar to Massart's lemma [2].

**Theorem 3.**

$$R_S(F) \leq \frac{\ell}{k} \sqrt{8 \log |F|},$$

where  $\ell^2 = \sup_{f \in F} \sum_{i=1}^k f(s_i)^2$ .

By the above two theorems, we can bound our approximation error even for the worst case.

## 4 Approximating Cosine Similarities

This section proposes our approximation algorithm and its analysis. The approximation algorithm takes as input a collection of  $n$  vectors  $V$  and two parameters  $(\epsilon, \delta)$  whose values are between 0 and 1. The algorithm outputs a set  $C = \{\tilde{S}(u, v) : u, v \in V, u \neq v\}$ , where  $\tilde{S}(u, v)$  is the  $(\epsilon, \delta)$ -approximation of cosine similarity between  $u$  and  $v$ , i.e., with probability at least  $1 - \delta$ , the worst approximation error in  $C$  is at most  $\epsilon$ . Each vector in  $V$  contains  $m$  features. We take the  $m$  features as the sample space  $D = \{1, \dots, m\}$ . For each feature  $s \in D$ , let  $f_{u,v}(s) = u_s \cdot v_s$ , where  $u_s$  is the  $s$ -th feature value of the vector  $u$ . Let  $F = \{f_{u,v} : u, v \in V, u \neq v\}$ . Thus  $|F| < n^2/2$  since symmetry of cosine similarity. It is clear that the true average of  $f_{u,v}$  equals to the cosine similarity between  $u$  and  $v$ . Given the sampled features, the upper bound of  $R_S(F)$  is

$$R_S(F) \leq \frac{\ell}{k} \sqrt{8 \log |F|} < \frac{4\ell \sqrt{\log n}}{k},$$

where  $\ell = \sqrt{\max_{f \in F} \sum_{i=1}^k f(s_i)^2}$ . Since  $F$  is finite, we can replace supreme by maximum.

### 4.1 The Algorithm

The approximation algorithm works in an iterative mode. For each iteration, we sample some new features  $s_i$ 's among  $D$  and aggregate the feature products given by  $f_{u,v}(s_i)$  for each  $f_{u,v}$  in  $F$ . Then we compute the error upper bound:

$$\Delta = \min \left\{ m \sqrt{\frac{2 \log n + \log(1/\delta)}{2k}}, \frac{4\ell \sqrt{\log n}}{k} + \left( m + m \sqrt{\frac{8}{k} \log \frac{2}{\delta}} + m \sqrt{\frac{8}{k} \log \frac{2}{\delta} + \frac{32\ell \sqrt{\log n}}{mk}} \right) \sqrt{\frac{\log \frac{8}{\delta}}{2k}} \right\},$$

where  $\ell = \sqrt{\max_{f \in F} \sum_{i=1}^k f(s_i)^2}$ , and  $k$  is the number of aggregated samples. If  $\Delta \leq \epsilon$ , then we stop and return the averages  $\frac{1}{k} \sum_{s_i \in S} f_{u,v}(s_i)$  for each pair  $u, v$ . Otherwise, we continue to the next round, where

---

**Algorithm 1** Cosine Similarity Approximation

---

**Input:** vectors  $V$  ( $|V| = n$ ); features  $U$  ( $|U| = m$ );  $\epsilon \in (0, 1)$ ;  $\delta \in (0, 1)$ .

**Output:**  $\text{Sim}(u, v)$  for each  $u, v \in V$  s.t.  $u \neq v$ .

```
 $k \leftarrow 0;$ 
 $S \leftarrow \emptyset;$ 
 $S(u, v) \leftarrow 0$  for each  $u, v \in V$  s.t.  $u \neq v$ ;
while  $k < m$  do
   $k' \leftarrow \text{next-sample-size}(k);$ 
  for  $i$  from  $k$  to  $k' - 1$  do
    Uniformly sample a feature  $s$  from  $U \setminus S$ ;
     $S(u, v) \leftarrow S(u, v) + u[s] \cdot v[s];$ 
     $S \leftarrow S \cup \{s\};$ 
  end for
   $\Delta \leftarrow \min \left\{ m \sqrt{\frac{2 \log n + \log(1/\delta)}{2k}}, \frac{4\ell \sqrt{\log n}}{k} + \left( m + m \sqrt{\frac{8}{k} \log \frac{2}{\delta}} + m \sqrt{\frac{8}{k} \log \frac{2}{\delta}} + \frac{32\ell \sqrt{\log n}}{mk} \right) \sqrt{\frac{\log \frac{8}{\delta}}{2k}} \right\};$ 
  if  $\Delta \leq \epsilon$  then
    break the while loop;
  end if
end while
 $S \leftarrow \{S(u, v)/k : u, v \in V, u \neq v\}.$ 
return  $S$ .
```

---

we will sample more features. If  $\Delta \leq \epsilon$  can never be satisfied, at the end we will sample all the  $m$  features and return the averages as the exact solution. Algorithm 1 gives the pseudocode of our solution. We use progressive approximation, i.e., for each round, the next sample size  $k'$  is larger than the previous size  $k$ . The algorithm stops once the upper bound  $\epsilon$  can be achieved.

It is clear to verify the correctness of our algorithm by Theorem 1, Theorem 2 and Theorem 3.

## 4.2 Improving the Upper Bound

Note that in the upper bound  $\Delta$  of Algorithm 1,  $m$  is a dominating variable: it is proportional to  $\Delta$ . Usually  $m$  can be quite large, e.g., from 100 to 10K. Thus it is worth investigating how to mitigate the negative effect of large  $m$ . The idea comes from Theorem 2, which assumes the range of each function  $f$  is  $[0, m]$ . However in reality, most feature products  $u[s] \cdot v[s]$  are close to zero due to sparsity, and its maximum value shall be much less than  $m$ . In practice, usually we can assume there is a good estimation (much less than  $m$ ) on the maximum feature product based on historic experience. To further lower the upper bound  $\Delta$ , a variant of Algorithm 1 may use the bound as follows:

$$\hat{m} = \max_{i \in [1, \dots, m], u, v \in V, u \neq v} u[i] \cdot v[i],$$

where  $[1, \dots, m]$  denotes all the  $m$  features, and  $V$  is the set of all vectors. Intuitively,  $\hat{m}$  is the maximum value of all the feature products, and we assume we have a good estimation of  $\hat{m}$ . Then we may choose the upper bound as follows:

$$\Delta = \min \left\{ \hat{m} \sqrt{\frac{2 \log n + \log(1/\delta)}{2k}}, \frac{4\ell \sqrt{\log n}}{k} + \hat{m} \left( 1 + \sqrt{\frac{8}{k} \log \frac{2}{\delta}} + \sqrt{\frac{8}{k} \log \frac{2}{\delta}} + \frac{32\ell \sqrt{\log n}}{\hat{m}k} \right) \sqrt{\frac{\log \frac{8}{\delta}}{2k}} \right\}.$$

We use experiments (in Section 6) to show that the improvement of the variant above is significant.

---

**Algorithm 2** Random Walk Generation

---

**Input:** reversed graph  $\overline{G}$ , sequence  $(s_1, \dots, s_T) \in [0, 1]^T$ , starting node  $a$ .

**Output:** a random walk  $W = (a, \dots)$  starting from  $a$ .

Let  $W$  be a sequence of length  $T + 1$ ;  
 $W[0] \leftarrow a$ ;  
**for**  $i$  from 1 to  $T$  **do**  
     $I \leftarrow \{b : \text{there is an edge in } \overline{G} \text{ from } W[i-1] \text{ to } b\}$ ;  
     $k \leftarrow |I|$ ;  
    **if**  $k=0$  **then**  
         $W[i] \leftarrow W[i-1]$ ;  
    **else**  
        Sort  $I$  in lexicographical order:  $(I[0], \dots, I[k-1])$ ;  
         $x \leftarrow \lfloor s_{i-1} * k \rfloor$ ;  
         $W[i] \leftarrow I[x]$ ;  
    **end if**  
**end for**  
**return**  $W$ .

---

## 5 Approximating SimRank

We approximate SimRank scores on the nodes in the digraph  $G = (V, E)$ . The basic idea is similar to the case of cosine similarity approximation, but the sample space  $D$  is changed to the  $2T$ -dimensional manifold  $[0, 1]^{2T}$ , where  $[0, 1]$  is the interval of real numbers between 0 and 1, and  $F$  is now defined as

$$F = \{f_{a,b} : a, b \in V, a \neq b\},$$

where given any two nodes  $a, b$ , the function  $f_{a,b}$  takes a sample  $s_i \in D$  as input and outputs a value in the interval  $[0, c]$ . Algorithm 2 shows how to generate a random walk given a sample from  $[0, 1]^T$  and a starting node  $a$ . It is clear that the random walk chosen by Algorithm 2 is uniformly distributed if the sample is uniformly drawn from  $[0, 1]^T$ . Thus given two nodes  $a, b$  and a sample  $s_i \in [0, 1]^{2T}$ , we can generate two random walks  $W_a, W_b$  starting from  $a$  and  $b$  respectively. Let

$$l_{a,b}(s_i) = \min\{j : 1 \leq j \leq T, W_a[j] = W_b[j]\},$$

i.e., the number of steps before two surfers starting from  $a, b$  meet at some node. If  $W_a$  and  $W_b$  never meet within  $T$  steps,  $l_{a,b}(s_i)$  is defined to be 0.

The function  $f_{a,b}(s_i)$  is defined as

$$f_{a,b}(s_i) = \begin{cases} 0 & \text{if } l_{a,b}(s_i) = 0, \\ c^{l_{a,b}(s_i)} & \text{otherwise.} \end{cases}$$

It is clear that the true average  $A_D(f_{a,b})$  equals to the SimRank between the nodes  $a$  and  $b$ . Thus a similar approximation idea based on Rademacher average can be applied. We still need to upper bound the worst approximation error. The new bound is stated as follows.

**Theorem 4.** Let  $F$  be a collection of functions  $f$  mapping  $D$  to  $[0, c]$ . For any  $\delta > 0$ , with probability at least  $1 - \delta$ , we have

$$\sup_{f \in F} |A_S(f) - A_D(f)| \leq c \sqrt{\frac{\log(2|F|) + \log(1/\delta)}{2k}}.$$

and

$$\sup_{f \in F} |A_S(f) - A_D(f)| \leq R_S(F) + \left( c + c \sqrt{\frac{8}{k} \log \frac{2}{\delta}} + c \sqrt{\frac{8}{k} \log \frac{2}{\delta} + \frac{8R_S(F)}{c}} \right) \sqrt{\frac{\log \frac{8}{\delta}}{2k}}.$$

---

**Algorithm 3** SimRank Approximation
 

---

**Input:** reversed graph  $\bar{G}$ ;  $\epsilon \in (0, 1)$ ;  $\delta \in (0, 1)$ ; maximum random walk length  $T$ ; maximum number of iterations  $R$ ; SimRank constant  $c$ .

**Output:** SimRank( $u, v$ ) for each  $u, v \in V$  s.t.  $u \neq v$ .

```

 $k \leftarrow 0$ ;
 $S(u, v) \leftarrow 0$  for each  $u, v \in V$  s.t.  $u \neq v$ ;
for count from 1 to  $R$  do
   $k' \leftarrow \text{next-sample-size}(k)$ ;
  for  $i$  from  $k$  to  $k' - 1$  do
    Uniformly sample a feature  $s$  from  $[0, 1]^{2T}$ ;
    for each  $a, b \in V \times V$  s.t.  $a \neq b$  do
       $W_a \leftarrow \text{Random Walk Generation}(s[1 \dots T])$ ;
       $W_b \leftarrow \text{Random Walk Generation}(s[(T + 1) \dots 2T])$ ;
       $L \leftarrow \{j : 1 \leq j \leq T, W_a[j] = W_b[j]\}$ ;
      if  $|L| > 0$  then
         $l_{a,b} \leftarrow \min L$ ;
         $S(u, v) \leftarrow S(u, v) + c^{l_{a,b}}$ ;
      end if
    end for
  end for
   $\Delta \leftarrow \min \left\{ c\sqrt{\frac{2\log n + \log(1/\delta)}{2k}}, \frac{4\ell\sqrt{\log n}}{k} + \left( c + c\sqrt{\frac{8}{k} \log \frac{2}{\delta}} + c\sqrt{\frac{8}{k} \log \frac{2}{\delta} + \frac{32\ell\sqrt{\log n}}{ck}} \right) \sqrt{\frac{\log \frac{8}{\delta}}{2k}} \right\}$ ;
  if  $\Delta \leq \epsilon$  then
    break the for loop;
  end if
end for
 $S \leftarrow \{S(u, v)/k : u, v \in V, u \neq v\}$ .
if count =  $R$  then
  show a message that  $(\epsilon, \delta)$  cannot be satisfied.
end if
return  $S$ .

```

---

The proof is essentially the same as the proof of Theorem 2. We leave the discussions to the Appendix. Also the upper bound of  $R_S(F)$  given by Theorem 3 remains unchanged.

Our approximation algorithm works as follows. For each iteration, we sample some new features  $s_i$ 's among  $D$ , generate random walks  $W_a, W_b$  from nodes  $a, b$  given  $s_i$  and aggregate  $f_{a,b}(s_i)$  for each  $f_{a,b}$  in  $F$ . Then we compute the error upper bound:

$$\Delta = \min \left\{ c\sqrt{\frac{2\log n + \log(1/\delta)}{2k}}, \frac{4\ell\sqrt{\log n}}{k} + \left( c + c\sqrt{\frac{8}{k} \log \frac{2}{\delta}} + c\sqrt{\frac{8}{k} \log \frac{2}{\delta} + \frac{32\ell\sqrt{\log n}}{ck}} \right) \sqrt{\frac{\log \frac{8}{\delta}}{2k}} \right\},$$

where  $\ell = \sqrt{\max_{f \in F} \sum_{i=1}^k f(s_i)^2}$ , and  $k$  is the aggregated samples. If  $\Delta \leq \epsilon$ , then we stop and return the averages  $\frac{1}{k} \sum_{s_i \in S} f_{a,b}(s_i)$  for each pair  $u, v$ . Otherwise, we continue to the next round, where we will sample more features. If  $\Delta \leq \epsilon$  can never be satisfied with a certain number of iterations, we return the approximated SimRank scores of node pairs, with the message that the input parameters  $(\epsilon, \delta)$  cannot be satisfied by our algorithm.

It is clear to verify the correctness of our algorithm by Theorem 4 and Theorem 3.



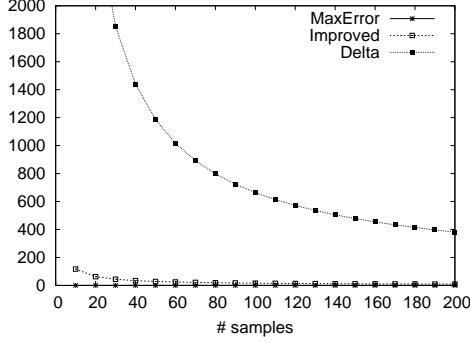


Figure 1: MaxErrors and upper bounds for cosine similarity with normal distribution.

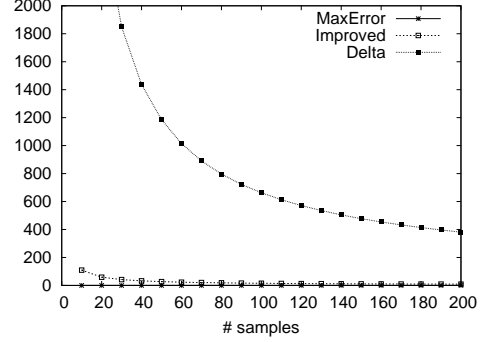


Figure 2: MaxError and upper bounds for cosine similarity with uniform distribution.

## 6 Evaluation

In this section we evaluate our algorithms. We use both synthesized and real-world data sets.

### 6.1 Setup

We implemented our algorithms by Python 3.4.3 and ran the programs on a Fedora 20 (Linux) cluster. Every measurement was averaged over 100 test cases, i.e., we ran our algorithms on 100 random vector collections or 100 random graphs and then computed the average.

- **Synthesized data sets**

For the cosine similarity approximation, we have 100 vectors with 1000 features. We considered two distributions of the feature values: uniform distribution and normal distribution. For uniform distribution, each feature value uniformly distributes over the interval  $[0, 1]$ . For normal distribution, each feature value is generated by  $|X|$ , where  $X$  is a random variable of standard normal distribution  $\mathcal{N}(0, 1)$ . At last, each vector was normalized with norm  $\sqrt{m}$ . We set the error probability  $\delta = 0.0001$ .

For the SimRank approximation, we have 100 nodes in total. We implemented two graph models: random graph model [17] and small-world model [44]. In random graph model, each pair of nodes are connected by an edge with probability  $p = 0.1$ . In small-world model, each node is connected by an edge with its 4 nearest neighbors, and each other pair of nodes are connected by an edge with probability  $p = 0.1$ . We choose the constant  $c = 0.7$ . We set the error probability  $\delta = 0.0001$ .

- **Real-world data sets**

For the cosine similarity approximation, we use **Cit-HepPh** and **Email-Enron** from Stanford Large Network Dataset Collection (SNAP) [25]. **Cit-HepPh** has 34551 vectors, each of which has 34551 features. **Email-Enron** has 36697 vectors, each of which has 36697 features.

For the SimRank approximation, we use two networks from **ego-Twitter** and **ego-Gplus** from SNAP. The network from **ego-Twitter** has 95 nodes and 951 edges. The network from **ego-Gplus** has 344 nodes and 4178 edges.

### 6.2 Approximation Errors and Sample Sizes

Figure 1 and Figure 2 present the maximum approximation errors and upper bound given by Algorithm 1 for the synthesized data sets. Here **MaxError** denotes the maximum absolute error among all the vector pairs, i.e.,

$$\text{MaxError} = \max_{u, v \in V, u \neq v} |\widetilde{\text{Sim}}(u, v) - \text{Sim}(u, v)|,$$

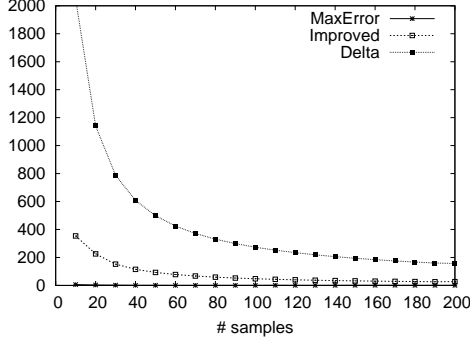


Figure 3: MaxErrors and upper bounds for cosine similarity for **Cit-HepPh**.

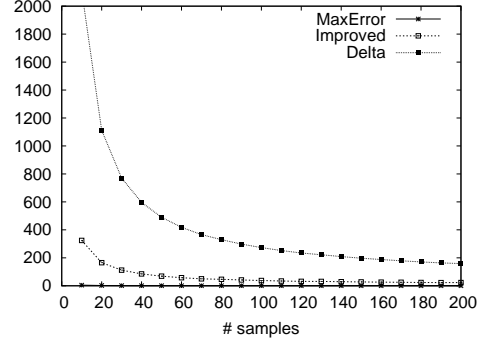


Figure 4: MaxError and upper bounds for cosine similarity for **Email-Enron**.

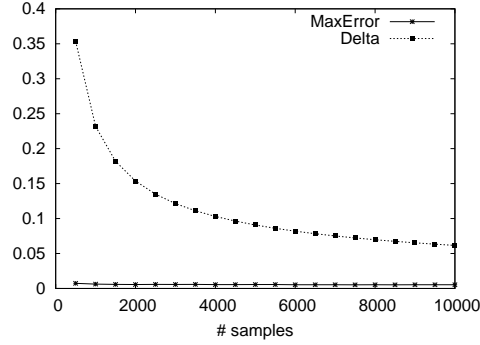


Figure 5: MaxError and upper bounds for SimRank with random graph model.

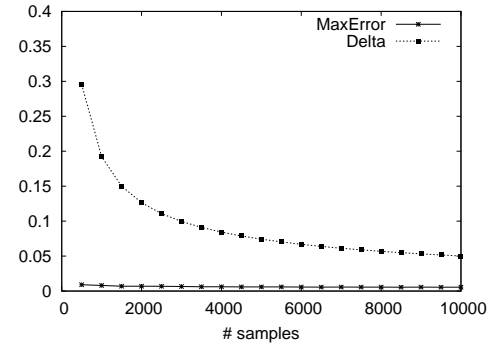


Figure 6: MaxError and upper bounds for SimRank with small-world model.

where  $\widetilde{Sim}(u, v)$  is the approximated similarity between  $u$  and  $v$  given by our algorithms. The upper bound Delta is the  $\Delta$  given in Algorithm 1, and the improved bound is given in Section 4.2. For the improved bound, we observe that with overwhelming probability, each feature product between any two vectors is less than 20.0 when  $m = 1000$ . Hence we choose the adjusted parameter  $\hat{m} = 20.0$ . See Section 4.2 for details. For both figures, when more samples are drawn, the maximum absolute errors and upper bounds decrease. Also our improved upper bounds are significantly tighter than the bounds by  $m$ , but they are still much larger than the maximum absolute errors. Hence our theoretical bounds are still quite loose. However, our improved bounds can be sufficient for practical use. For uniform distribution, by 200 samplings, we can guarantee that the maximum absolute error among all the vector pairs is less than 9.0 with probability at least 99.99%. Note that the cosine similarities can be between 0 and  $m = 1000$ . Thus 9.0 is relatively small. Similarly for normal distribution, by 190 samplings we can guarantee that with probability at least 99.99%, the maximum absolute error is less than 10.0.

Figure 3 and Figure 4 give the maximum approximation errors and upper bound given by Algorithm 1 for the real-world data sets. Since there are more features (more than 30K), the upper bounds cannot be as tight as before. However, for **Cit-HepPh**, only 200 samples can guarantee an upper bound 27.2, which is quite small compared to the number of features.

Figure 5 and Figure 6 present the approximation errors and upper bound given by Algorithm 3 for the synthesized data sets. Here the upper bound Delta is given in Algorithm 3. MaxError is same as before. For both figures, when more samples are drawn, the maximum absolute errors and upper bounds decrease. Note that even though our bounds are still quite loose compared to the maximum absolute errors, they can be

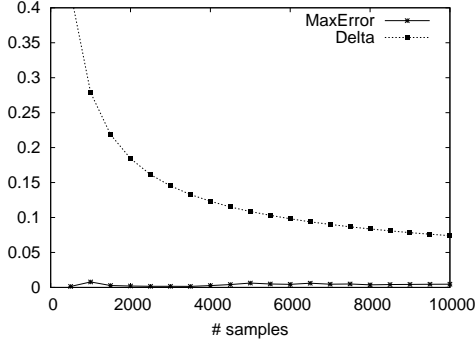


Figure 7: MaxError and upper bounds for Sim-Rank for the network from **ego-Twitter**.

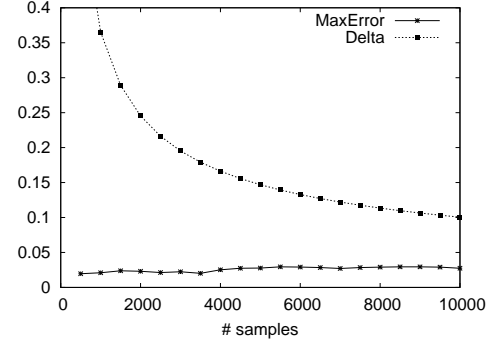


Figure 8: MaxError and upper bounds for Sim-Rank for the network from **ego-Gplus**.

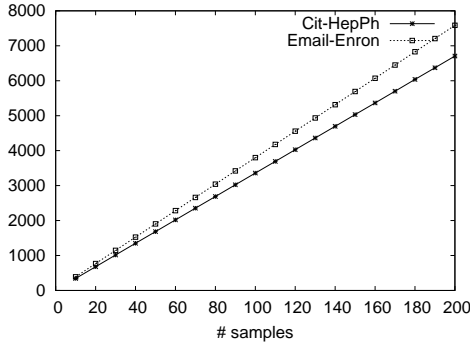


Figure 9: Running time of Algorithm 1 given sample sizes.

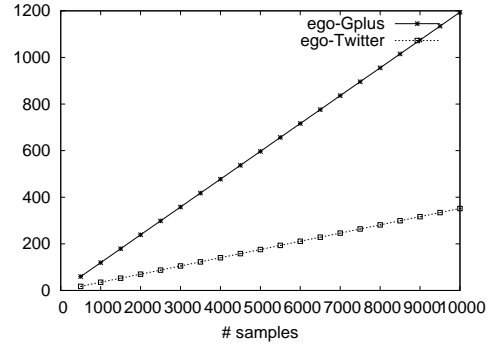


Figure 10: Running time of Algorithm 3 given sample sizes.

practically used. For random graph model, by taking 10000 samples, we can guarantee that the maximum absolute error among all the node pairs is less than 0.062 with probability at least 99.99%. For small-world model, by taking 10000 samples, we can guarantee that the maximum absolute error is less than 0.051 with probability at least 99.99%.

Figure 7 and Figure 8 give the maximum approximation errors and upper bound given by Algorithm 3 for the real-world data sets. The upper bounds are not as tight as before. For **ego-Twitter**, 10000 samples can guarantee an upper bound of 0.074. For **ego-Gplus**, 10000 samples can guarantee an upper bound of 0.10.

### 6.3 Running Time

Figure 9 and Figure 10 give the running time of our algorithms on the real-world data sets given the sample sizes. Here we did not use any parallelism or detection techniques to implement our algorithms. Note that in APSS we need to compute for each pair of objects. The number of such pairs grows quadratically. As a result when the sample size is large, the computation can take a few hours. A good news is that since the computation of each pair is independent from each other, the approximation algorithms can be easily distributed over multiple cores.

## 7 Conclusion and Future Research

In this paper we have given two approximation algorithms (on cosine similarity and SimRank respectively) for all-pairs similarity search. A rigorous analysis using Rademacher average has been presented. We also have evaluated their performance by experiments on both synthesized and real-world data sets. The results show that our algorithms can precisely approximate the similarities with acceptable time complexity and error probability.

We note that the upper bounds in this paper still have some space to improve. In the experiments our upper bounds are roughly 5 to 10 times the maximum absolute errors. In the proofs it is unclear whether the bounds we have used are the best possible. Hence the algorithms could be improved. Also it can be an interesting topic how to more efficiently use parallelism in APSS samplings.

## References

- [1] Maha Alabduljalil, Xun Tang, and Tao Yang. Cache-conscious performance optimization for similarity search. In *Proceedings of the 36th international ACM SIGIR conference on Research and development in information retrieval*, pages 713–722. ACM, 2013.
- [2] Davide Anguita, Alessandro Ghio, Luca Oneto, and Sandro Ridella. A deep connection between the vapnik–chervonenkis entropy and the rademacher complexity. *IEEE transactions on neural networks and learning systems*, 25(12):2202–2211, 2014.
- [3] Peter L Bartlett, Olivier Bousquet, and Shahar Mendelson. Local rademacher complexities. *Annals of Statistics*, pages 1497–1537, 2005.
- [4] Peter L Bartlett and Shahar Mendelson. Rademacher and gaussian complexities: Risk bounds and structural results. *Journal of Machine Learning Research*, 3(Nov):463–482, 2002.
- [5] Roberto J Bayardo, Yiming Ma, and Ramakrishnan Srikant. Scaling up all pairs similarity search. In *Proceedings of the 16th international conference on World Wide Web*, pages 131–140. ACM, 2007.
- [6] Jacob Benesty, Jingdong Chen, Yiteng Huang, and Israel Cohen. Pearson correlation coefficient. In *Noise reduction in speech processing*, pages 1–4. Springer, 2009.
- [7] S Boucheron, G Lugosi, and Pascal Massart. A sharp concentration inequality with applications. *Random Structures and Algorithms*, 1999.
- [8] Olivier Bousquet, Stéphane Boucheron, and Gábor Lugosi. Introduction to statistical learning theory. In *Advanced lectures on machine learning*, pages 169–207. Springer, 2004.
- [9] Ulrik Brandes. A faster algorithm for betweenness centrality\*. *Journal of mathematical sociology*, 25(2):163–177, 2001.
- [10] Huanhuan Cao, Daxin Jiang, Jian Pei, Qi He, Zhen Liao, Enhong Chen, and Hang Li. Context-aware query suggestion by mining click-through and session data. In *Proceedings of the 14th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 875–883. ACM, 2008.
- [11] Liangliang Cao, Brian Cho, Hyun Duk Kim, Zhen Li, Min-Hsuan Tsai, and Indranil Gupta. Delta-simrank computing on mapreduce. In *Proceedings of the 1st International Workshop on Big Data, Streams and Heterogeneous Source Mining: Algorithms, Systems, Programming Models and Applications*, pages 28–35. ACM, 2012.
- [12] Carlos Castillo, Debora Donato, Aristides Gionis, Vanessa Murdock, and Fabrizio Silvestri. Know your neighbors: Web spam detection using the web topology. In *Proceedings of the 30th annual international ACM SIGIR conference on Research and development in information retrieval*, pages 423–430. ACM, 2007.

- [13] Moses S Charikar. Similarity estimation techniques from rounding algorithms. In *Proceedings of the thirty-fourth annual ACM symposium on Theory of computing*, pages 380–388. ACM, 2002.
- [14] Xin Dong, Alon Halevy, Jayant Madhavan, Ema Nemes, and Jun Zhang. Similarity search for web services. In *Proceedings of the Thirtieth international conference on Very large data bases-Volume 30*, pages 372–383. VLDB Endowment, 2004.
- [15] Ronald Fagin, Ravi Kumar, and Dandapani Sivakumar. Efficient similarity search and classification via rank aggregation. In *Proceedings of the 2003 ACM SIGMOD international conference on Management of data*, pages 301–312. ACM, 2003.
- [16] Yasuhiro Fujiwara, Makoto Nakatsuji, Hiroaki Shiokawa, and Makoto Onizuka. Efficient search algorithm for simrank. In *Data Engineering (ICDE), 2013 IEEE 29th International Conference on*, pages 589–600. IEEE, 2013.
- [17] Edgar N Gilbert. Random graphs. *The Annals of Mathematical Statistics*, 30(4):1141–1144, 1959.
- [18] Aristides Gionis, Piotr Indyk, Rajeev Motwani, et al. Similarity search in high dimensions via hashing. *VLDB*, 99(6):518–529, 1999.
- [19] Lieve Hamers, Yves Hemeryck, Guido Herweyers, Marc Janssen, Hans Keters, Ronald Rousseau, and André Vanhoutte. Similarity measures in scientometric research: the jaccard index versus salton’s cosine formula. *Information Processing & Management*, 25(3):315–318, 1989.
- [20] Guoming He, Haijun Feng, Cuiping Li, and Hong Chen. Parallel simrank computation on large graphs with iterative aggregation. In *Proceedings of the 16th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 543–552. ACM, 2010.
- [21] Wassily Hoeffding. Probability inequalities for sums of bounded random variables. *Journal of the American statistical association*, 58(301):13–30, 1963.
- [22] Piotr Indyk and Rajeev Motwani. Approximate nearest neighbors: towards removing the curse of dimensionality. In *Proceedings of the thirtieth annual ACM symposium on Theory of computing*, pages 604–613. ACM, 1998.
- [23] Glen Jeh and Jennifer Widom. Simrank: a measure of structural-context similarity. In *Proceedings of the eighth ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 538–543. ACM, 2002.
- [24] Mitsuru Kusumoto, Takanori Maehara, and Ken-ichi Kawarabayashi. Scalable similarity search for simrank. In *Proceedings of the 2014 ACM SIGMOD international conference on Management of data*, pages 325–336. ACM, 2014.
- [25] Jure Leskovec and Andrej Krevl. Snap datasets: Stanford large network dataset collection. *Stanford University*, 2015.
- [26] Cuiping Li, Jiawei Han, Guoming He, Xin Jin, Yizhou Sun, Yintao Yu, and Tianyi Wu. Fast computation of simrank for static and dynamic information networks. In *Proceedings of the 13th International Conference on Extending Database Technology*, pages 465–476. ACM, 2010.
- [27] Jimmy Lin. Brute force and indexed approaches to pairwise document similarity comparisons with mapreduce. In *Proceedings of the 32nd international ACM SIGIR conference on Research and development in information retrieval*, pages 155–162. ACM, 2009.
- [28] Chao Liu, Chen Chen, Jiawei Han, and Philip S Yu. Gplag: detection of software plagiarism by program dependence graph analysis. In *Proceedings of the 12th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 872–881. ACM, 2006.

- [29] Colin McDiarmid. On the method of bounded differences. *Surveys in combinatorics*, 141(1):148–188, 1989.
- [30] Mehryar Mohri and Afshin Rostamizadeh. Rademacher complexity bounds for non-iid processes. In *Advances in Neural Information Processing Systems*, pages 1097–1104, 2009.
- [31] Luca Oneto, Alessandro Ghio, Davide Anguita, and Sandro Ridella. An improved analysis of the rademacher data-dependent bound using its self bounding property. *Neural Networks*, 44:107–111, 2013.
- [32] Paul Resnick and Hal R Varian. Recommender systems. *Communications of the ACM*, 40(3):56–58, 1997.
- [33] Matteo Riondato and Evgenios M Kornaropoulos. Fast approximation of betweenness centrality through sampling. In *Proceedings of the 7th ACM international conference on Web search and data mining*, pages 413–422. ACM, 2014.
- [34] Matteo Riondato and Evgenios M Kornaropoulos. Fast approximation of betweenness centrality through sampling. *Data Mining and Knowledge Discovery*, 30(2):438–475, 2016.
- [35] Matteo Riondato and Eli Upfal. Mining frequent itemsets through progressive sampling with rademacher averages. In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 1005–1014. ACM, 2015.
- [36] Matteo Riondato and Eli Upfal. Abra: Approximating betweenness centrality in static and dynamic graphs with rademacher averages. *arXiv preprint arXiv:1602.05866*, 2016.
- [37] Badrul Sarwar, George Karypis, Joseph Konstan, and John Riedl. Item-based collaborative filtering recommendation algorithms. In *Proceedings of the 10th international conference on World Wide Web*, pages 285–295. ACM, 2001.
- [38] Alexander Strehl, Joydeep Ghosh, and Raymond Mooney. Impact of similarity measures on web-page clustering. In *Workshop on Artificial Intelligence for Web Search (AAAI 2000)*, pages 58–64, 2000.
- [39] Xun Tang, Maha Alabduljalil, Xin Jin, and Tao Yang. Load balancing for partition-based similarity search. In *Proceedings of the 37th international ACM SIGIR conference on Research & development in information retrieval*, pages 193–202. ACM, 2014.
- [40] Sandeep Tata and Jignesh M Patel. Estimating the selectivity of tf-idf based cosine similarity predicates. *ACM Sigmod Record*, 36(2):7–12, 2007.
- [41] Vladimir Vapnik. *The nature of statistical learning theory*. Springer Science & Business Media, 2013.
- [42] Vladimir Vapnik, Esther Levin, and Yann Le Cun. Measuring the vc-dimension of a learning machine. *Neural Computation*, 6(5):851–876, 1994.
- [43] Vladimir Naumovich Vapnik and Vladimir Vapnik. *Statistical learning theory*, volume 1. Wiley New York, 1998.
- [44] Duncan J Watts and Steven H Strogatz. Collective dynamics of small-world networks. *nature*, 393(6684):440–442, 1998.
- [45] Zhihua Xia, Xinhui Wang, Xingming Sun, and Qian Wang. A secure and dynamic multi-keyword ranked search scheme over encrypted cloud data. *IEEE Transactions on Parallel and Distributed Systems*, 27(2):340–352, 2016.
- [46] Weiren Yu and Julie Ann McCann. High quality graph-based similarity search. In *Proceedings of the 38th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 83–92. ACM, 2015.

## 8 Appendix

### 8.1 Proof of Theorem 1

First, for any  $\epsilon > 0$ ,

$$\begin{aligned}\Pr[U_S(F) > \epsilon] &= \Pr[\exists f \in F, A_S(f) - A_D(f) > \epsilon] \\ &\leq \sum_{f \in F} \Pr[A_S(f) - A_D(f) > \epsilon] \\ &= \sum_{f \in F} \Pr\left[\frac{1}{k} \sum_{i=1}^k f(s_i) - A_D(f) > \epsilon\right].\end{aligned}$$

By Hoeffding's inequality [8] we have

$$\Pr\left[\frac{1}{k} \sum_{i=1}^k f(s_i) - A_D(f) > \epsilon\right] \leq \exp\left(-\frac{2k\epsilon^2}{m^2}\right).$$

Hence

$$\Pr[U_S(F) > \epsilon] \leq |F| \exp\left(-\frac{2k\epsilon^2}{m^2}\right).$$

Similarly one can show that

$$\Pr[\sup_{f \in F} [A_D(f) - A_S(f)] > \epsilon] \leq |F| \exp\left(-\frac{2k\epsilon^2}{m^2}\right).$$

Thus putting the two cases together,

$$\Pr[\sup_{f \in F} |A_S(f) - A_D(f)| > \epsilon] \leq 2|F| \exp\left(-\frac{2k\epsilon^2}{m^2}\right).$$

Equivalently for any  $\delta > 0$ , with probability at least  $1 - \delta$ ,

$$\sup_{f \in F} |A_S(f) - A_D(f)| \leq m \sqrt{\frac{\log(2|F|) + \log(1/\delta)}{2k}}.$$

We have obtained the desired upper bound in Theorem 1.

### 8.2 Proof of Theorem 2

In this section, we show our main result (Theorem 2). We start from the definition of self bounding function [31].

**Definition 1.** Let  $s_1, s_2, \dots, s_k$  be independent random variables taking values from a set  $D$ . A function  $f : D^k \rightarrow [0, +\infty]$  is a self bounding function if there exists a constant  $c$  and a function  $g : D^{k-1} \rightarrow \mathbb{R}$  such that for any  $s_1, \dots, s_{j-1}, s_{j+1}, \dots, s_k \in D$ , the following conditions hold:

$$\begin{aligned}0 &\leq f(s_1, \dots, s_k) - g(s_1, \dots, s_{j-1}, s_{j+1}, \dots, s_k) \leq c, \\ \sum_{j=1}^k [f(s_1, \dots, s_k) - g(s_1, \dots, s_{j-1}, s_{j+1}, \dots, s_k)] &\leq f(s_1, \dots, s_k).\end{aligned}$$

The following concentration inequality can be achieved for self bounding functions [7].

**Lemma 1.** [7] If a function  $Z = f(s_1, \dots, s_k)$  is a self bounding function with constant  $c$ , then for  $t \leq \mathbb{E}Z$ ,

$$\Pr[\mathbb{E}Z - Z \geq t] \leq \exp\left(-\frac{t^2}{2c\mathbb{E}Z}\right).$$

For  $t > \mathbb{E}Z$ , the left probability is zero trivially. Here we take randomness over  $s_1, s_2, \dots, s_k$ .

By using the above lemma, we can show a similar inequality for Rademacher average.

**Lemma 2.**

$$\Pr[\mathbb{E}R_S(F) \geq R_S(F) + t] \leq \exp\left(-\frac{kt^2}{4m\mathbb{E}R_S(F)}\right),$$

where  $\mathbb{E}$  takes randomness over the samplings  $s_1, s_2, \dots, s_k$ .

*Proof.* It suffices to show that  $R_S(F)$  is a self bounding function with constant  $c = 2m/k$ . Define

$$Z = R_S(F) = \mathbb{E}_\sigma \sup_{f \in F} \left[ \frac{2}{k} \sum_{i=1}^k \sigma_i f(s_i) \right],$$

$$G_j = \mathbb{E}_\sigma \sup_{f \in F} \left[ \frac{2}{k} \sum_{i \neq j} \sigma_i f(s_i) \right].$$

It is clear that  $Z$  is non-negative:

$$Z \geq \sup_{f \in F} \left[ \mathbb{E}_\sigma \frac{2}{k} \sum_{i=1}^k \sigma_i f(s_i) \right] = 0.$$

Also it is clear that  $Z \geq G_j$  for each  $j$ : suppose  $\tilde{f}$  achieves the supreme of  $G_j$ . Then

$$\begin{aligned} G_j &= \mathbb{E}_\sigma \left[ \frac{2}{k} \sum_{i=1}^k \sigma_i \tilde{f}(s_i) - \frac{2}{k} \sigma_j \tilde{f}(s_j) \right] \\ &= \mathbb{E}_\sigma \left[ \frac{2}{k} \sum_{i=1}^k \sigma_i \tilde{f}(s_i) \right] - \mathbb{E}_\sigma \left[ \frac{2}{k} \sigma_j \tilde{f}(s_j) \right] \\ &= \mathbb{E}_\sigma \left[ \frac{2}{k} \sum_{i=1}^k \sigma_i \tilde{f}(s_i) \right] \leq Z. \end{aligned}$$

Next we show  $Z - G_j \leq 2m/k = c$ :

$$\begin{aligned} G_j &= \mathbb{E}_\sigma \sup_{f \in F} \left[ \frac{2}{k} \sum_{i=1}^k \sigma_i f(s_i) - \frac{2}{k} \sigma_j f(s_j) \right] \\ &\geq \mathbb{E}_\sigma \sup_{f \in F} \left[ \frac{2}{k} \sum_{i=1}^k \sigma_i f(s_i) \right] - \mathbb{E}_\sigma \sup_{f \in F} \left[ \frac{2}{k} \sigma_j f(s_j) \right] \\ &\geq \mathbb{E}_\sigma \sup_{f \in F} \left[ \frac{2}{k} \sum_{i=1}^k \sigma_i f(s_i) \right] - \frac{2m}{k}. \end{aligned}$$



Finally we need to verify  $\sum_{j=1}^k Z - G_j \leq Z$ :

$$\begin{aligned} \sum_{j=1}^k G_j &= \mathbb{E}_\sigma \sum_{j=1}^k \sup_{f \in F} \left[ \frac{2}{k} \sum_{i \neq j} \sigma_i f(s_i) \right] \\ &\geq \mathbb{E}_\sigma \sup_{f \in F} \left[ \frac{2}{k} \sum_{j=1}^k \sum_{i \neq j} \sigma_i f(s_i) \right] \\ &= \frac{2(k-1)}{k} \mathbb{E}_\sigma \sup_{f \in F} \left[ \sum_{j=1}^k \sigma_j f(s_j) \right] = (k-1)Z. \end{aligned}$$

□

We still need the following lemma on the relation between uniform deviation and Rademacher average.

**Lemma 3.**

$$\begin{aligned} \mathbb{E} \sup_{f \in F} [A_S(f) - A_D(f)] &\leq \mathbb{E} R_S(F), \\ \mathbb{E} \sup_{f \in F} [A_D(f) - A_F(f)] &\leq \mathbb{E} R_S(F). \end{aligned}$$

Here we take randomness over the  $k$  samplings.

*Proof.* The proof idea is based on ghost samplings, i.e., independently draw another  $k$  samples:  $s'_1, \dots, s'_k$ , and then we have

$$A_D(f) = \frac{1}{m} \sum_{i=1}^m f(i) = \mathbb{E} \frac{1}{k} \sum_{j=1}^k f(s'_j),$$

where  $\mathbb{E}$  takes randomness over the  $k$  ghost samples. Thus

$$\begin{aligned} \mathbb{E} \sup_{f \in F} [A_S(f) - A_D(f)] &= \mathbb{E} \sup_{f \in F} \left[ \frac{1}{k} \sum_{i=1}^k f(s_i) - \mathbb{E} \frac{1}{k} \sum_{j=1}^k f(s'_j) \right] \\ &\leq \mathbb{E} \sup_{f \in F} \left[ \frac{1}{k} \sum_{i=1}^k f(s_i) - \frac{1}{k} \sum_{j=1}^k f(s'_j) \right]. \end{aligned}$$

Since all the samples  $s, s'$  are independently identically distributed, flipping the sign of  $f(s_i) - f(s'_i)$  will not change the expected supreme, i.e.,

$$\mathbb{E} \sup_{f \in F} \left[ \frac{1}{k} \sum_{i=1}^k f(s_i) - \frac{1}{k} \sum_{j=1}^k f(s'_j) \right] = \mathbb{E} \sup_{f \in F} \frac{1}{k} \sum_{i=1}^k [\sigma_i (f(s_i) - f(s'_i))],$$

where  $\sigma_i$  is uniformly distributed over  $\{-1, 1\}$ . Since

$$\mathbb{E} \sup_{f \in F} \frac{1}{k} \sum_{i=1}^k [\sigma_i (f(s_i) - f(s'_i))] \leq 2 \mathbb{E} \sup_{f \in F} \frac{1}{k} \sum_{i=1}^k \sigma_i f(s_i) = \mathbb{E} R_S(F),$$

we have shown the first inequality. The second inequality is analogous. □

We also need McDiarmid's inequality [29].

**Lemma 4.** [29] Let  $s_1, \dots, s_k$  be independent random variables taking values from a set  $D$ . Suppose a function  $h : D^k \rightarrow \mathbb{R}$  satisfies

$$\sup_{x_1, \dots, x_k, x'_i \in D} |h(x_1, \dots, x_k) - h(x_1, \dots, x_{i-1}, x'_i, x_{i+1}, \dots, x_k)| \leq c_i$$

for some constants  $c_i$  and every  $1 \leq i \leq k$ . Then for any  $t > 0$ , we have

$$\Pr[h(s_1, \dots, s_k) - \mathbb{E}h(s_1, \dots, s_k) \geq t] \leq \exp\left(-\frac{2t^2}{\sum_{i=1}^k c_i^2}\right).$$

By the above three lemmas, we can bound the difference between true average and sampled average as follows.

**Lemma 5.**

$$\begin{aligned} & \Pr\left[\sup_{f \in F} |A_D(f) - A_S(f)| \geq R_S(F) + t\right] \\ & \leq 4 \exp\left(-\frac{2kt^2}{(m + \sqrt{8m\mathbb{E}R_S(F)})^2}\right). \end{aligned}$$

*Proof.* First by Lemma 3,

$$\begin{aligned} & \Pr\left[\sup_{f \in F} [A_D(f) - A_S(f)] \geq R_S(F) + t\right] \\ & \leq \Pr\left[\sup_{f \in F} [A_D(f) - A_S(f)] \geq \mathbb{E} \sup_{f \in F} [A_D(f) - A_S(f)] + at\right] \\ & \quad + \Pr[\mathbb{E}R_S(F) \geq R_S(F) + (1-a)t] \end{aligned}$$

for any  $a \in [0, 1]$ . Let

$$h(s_1, \dots, s_k) = A_D(f) - A_S(f) = A_D(f) - \frac{1}{k} \sum_{i=1}^k f(s_i).$$

It is clear that

$$\begin{aligned} & \sup_{x_1, \dots, x_k, x'_i \in D} |h(x_1, \dots, x_k) - h(x_1, \dots, x_{i-1}, x'_i, x_{i+1}, \dots, x_k)| \\ & = \sup_{x_1, \dots, x_k, x'_i \in D} \left| \frac{1}{k} \sum_{j=1, j \neq i}^k f(x_j) + \frac{1}{k} f(x'_i) - \frac{1}{k} \sum_{i=1}^k f(x_i) \right| \\ & = \sup_{x_1, \dots, x_k, x'_i \in D} \left| \frac{1}{k} f(x'_i) - \frac{1}{k} f(x_i) \right| \leq \frac{m}{k}. \end{aligned}$$

By McDiarmid's inequality,

$$\begin{aligned} & \Pr\left[\sup_{f \in F} [A_D(f) - A_S(f)] \geq \mathbb{E} \sup_{f \in F} [A_D(f) - A_S(f)] + at\right] \\ & \leq \exp\left(-\frac{2a^2t^2}{\sum_{i=1}^k m^2/k^2}\right) = \exp\left(-\frac{2ka^2t^2}{m^2}\right). \end{aligned}$$

By Lemma 2,

$$\Pr[\mathbb{E}R_S(F) \geq R_S(F) + (1-a)t] \leq \exp\left(-\frac{k(1-a)^2t^2}{4m\mathbb{E}R_S(F)}\right).$$

Let  $a = 1/(1 + \sqrt{8\mathbb{E}R_S(F)/m})$ . Then putting everything together, we have

$$\begin{aligned} & \Pr \left[ \sup_{f \in F} [A_D(f) - A_S(f)] \geq R_S(F) + t \right] \\ & \leq 2 \exp \left( - \frac{2kt^2}{(m + \sqrt{8m\mathbb{E}R_S(F)})^2} \right). \end{aligned}$$

Similarly one can show

$$\begin{aligned} & \Pr \left[ \sup_{f \in F} [A_S(f) - A_D(f)] \geq R_S(F) + t \right] \\ & \leq 2 \exp \left( - \frac{2kt^2}{(m + \sqrt{8m\mathbb{E}R_S(F)})^2} \right). \end{aligned}$$

Thus we have the inequality as desired.  $\square$

By the above lemma we have the following important corollary.

**Corollary 1.** *With probability at least  $1 - \delta$ , we have*

$$\sup_{f \in F} |A_S(f) - A_D(f)| \leq R_S(F) + (m + \sqrt{8m\mathbb{E}R_S(F)}) \sqrt{\frac{\log \frac{4}{\delta}}{2k}}.$$

We still need to upper bound  $\mathbb{E}R_S(F)$ . By Lemma 2, with probability at least  $1 - \delta$ ,

$$\mathbb{E}R_S(F) \leq R_S(F) + \sqrt{4m\mathbb{E}R_S(F) \frac{\log \frac{1}{\delta}}{k}}.$$

Or equivalently,

$$\sqrt{\mathbb{E}R_S(F)} \leq \sqrt{\frac{m}{k} \log \frac{1}{\delta}} + \sqrt{\frac{m}{k} \log \frac{1}{\delta} + R_S(F)}.$$

Hence with probability at least  $1 - 2\delta$ , we have

$$\sup_{f \in F} |A_S(f) - A_D(f)| \leq R_S(F) + \left( m + m\sqrt{\frac{8}{k} \log \frac{1}{\delta}} + m\sqrt{\frac{8}{k} \log \frac{1}{\delta} + \frac{8R_S(F)}{m}} \right) \sqrt{\frac{\log \frac{4}{\delta}}{2k}}.$$

We have shown Theorem 2.

### 8.3 Proof of Theorem 3

For any  $s > 0$ , by Jensen's inequality,

$$\begin{aligned} \exp(skR_S(F)) &= \exp \left( 2s\mathbb{E}_\sigma \sup_{f \in F} \sum_{i=1}^k \sigma_i f(s_i) \right) \\ &\leq \mathbb{E}_\sigma \exp \left( 2s \sup_{f \in F} \sum_{i=1}^k \sigma_i f(s_i) \right) \\ &\leq \mathbb{E}_\sigma \sum_{f \in F} \exp \left( 2s \sum_{i=1}^k \sigma_i f(s_i) \right). \end{aligned}$$

By Hoeffding's Lemma [21],

$$\begin{aligned} & \mathbb{E}_\sigma \sum_{f \in F} \exp \left( 2s \sum_{i=1}^k \sigma_i f(s_i) \right) \\ & \leq \sum_{f \in F} \prod_{i=1}^k \exp (2s^2 f(s_i)^2) \\ & = \sum_{f \in F} \exp \left( 2s^2 \sum_{i=1}^k f(s_i)^2 \right). \end{aligned}$$

Let  $\ell^2 = \sup_{f \in F} \sum_{i=1}^k f(s_i)^2$ , and then

$$\sum_{f \in F} \exp \left( 2s^2 \sum_{i=1}^k f(s_i)^2 \right) \leq |F| \exp (2s^2 \ell^2).$$

Thus

$$R_S(F) \leq \frac{1}{sk} (\log |F| + 2s^2 \ell^2),$$

for any  $s > 0$ . It turns out that to minimize the right hand side of the above equation, we have

$$s = \sqrt{\frac{\log |F|}{2\ell^2}}.$$

Then

$$R_S(F) \leq \frac{\ell}{k} \sqrt{8 \log |F|}.$$

#### 8.4 Discussions of Theorem 4

Theorem 4 can be treated as a special case of Theorem 1 and Theorem 2 when  $m = c$ . All the reasoning will not be affected and thus the desired bound follows.