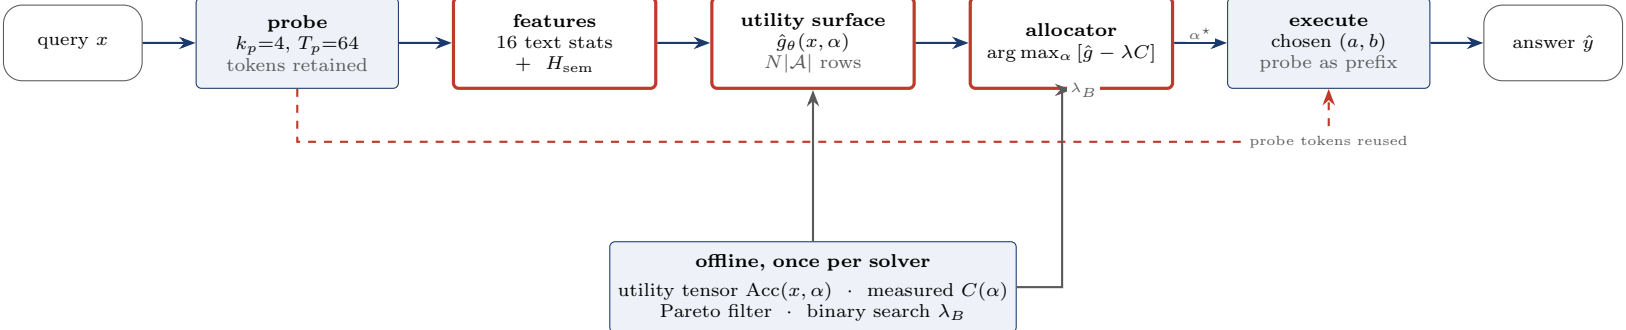

query x
probe
k_p=4, T_p=64
tokens retained
features
16 text stats
+ H_{sem}
utility surface
$\hat{g}_\theta(x, \alpha)$
$N|\mathcal{A}|$ rows
allocator
$\arg\max_\alpha [\hat{g} - \lambda C]$
$\alpha^\star$
execute
chosen (a, b)
probe as prefix
answer $\hat{y}$
λ_B
probe tokens reused
offline, once per solver
utility tensor $\text{Acc}(x, \alpha)$ · measured $C(\alpha)$
Pareto filter · binary search λ_B