

1-D: budget only (prior work)

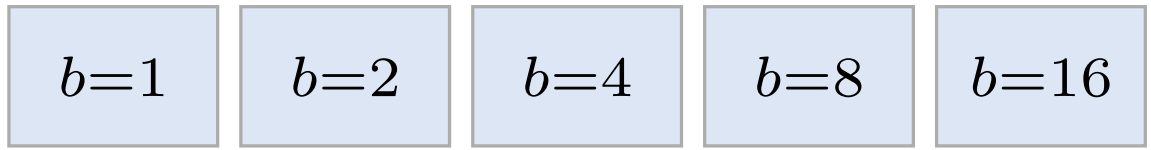

$|\mathcal{A}| = 5$, engine fixed to self-consistency

2-D: topology × budget (this work)

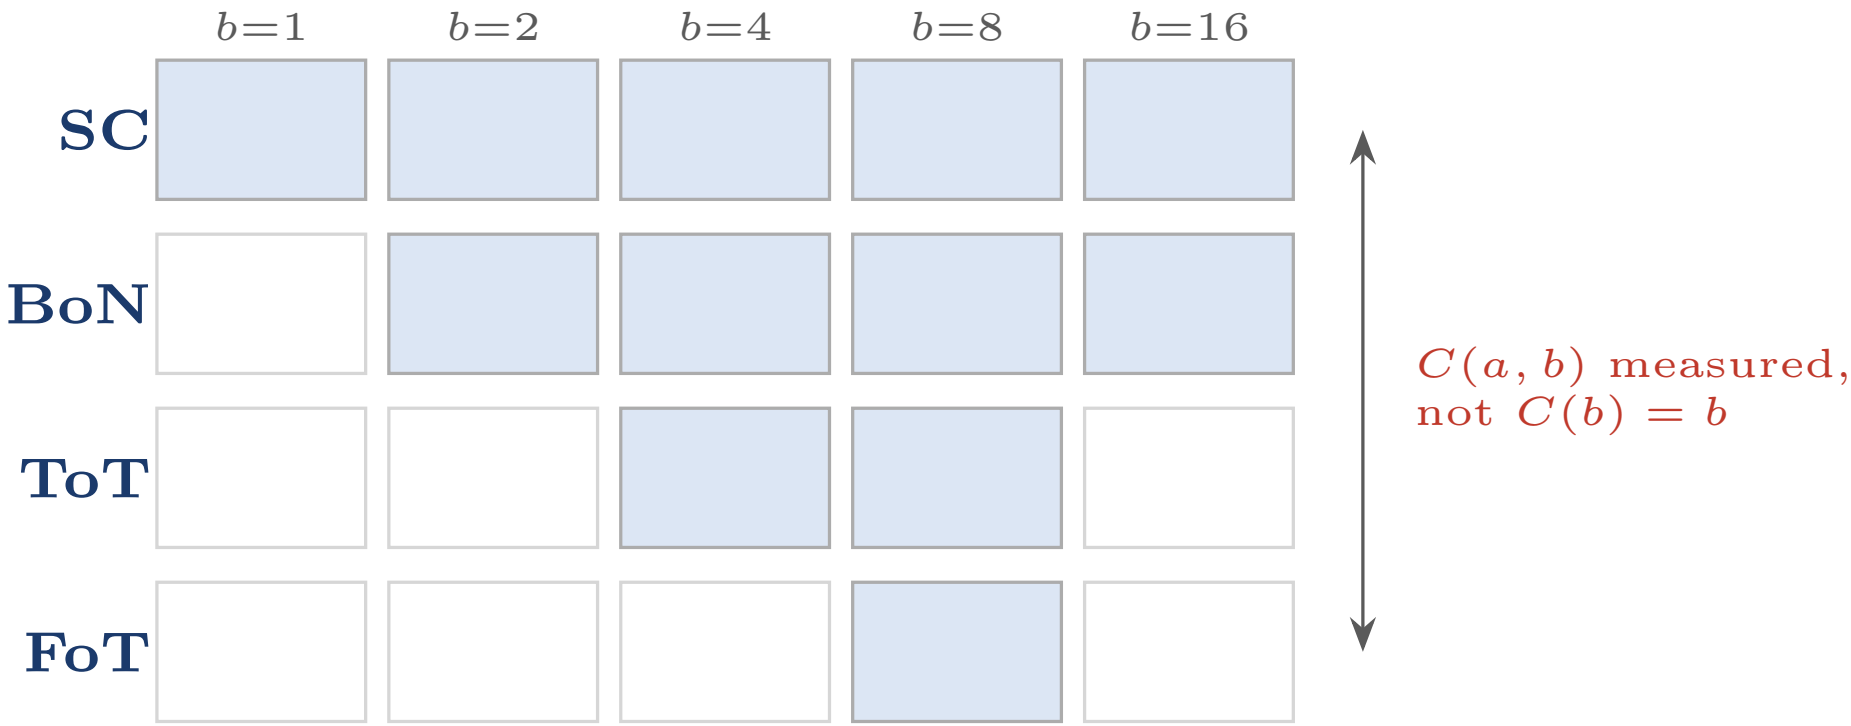

$|\mathcal{A}| = 12$; shaded cells are instantiated actions