```
//Server side
#include <stdio.h>
#include <string.h>
#include <unistd.h>
#include <arpa/inet.h>
#include <sys/socket.h>

int main() {
   int sockfd;
   char buffer[1024];
   struct sockaddr_in server_addr;
   socklen_t len = sizeof(server_addr);

   sockfd = socket(AF_INET, SOCK_DGRAM, 0);

   if (sockfd < 0) {
      perror("Socket creation failed");
      return 1;
   }

   server_addr.sin_family = AF_INET;
   server_addr.sin_port = htons(12345);
   server_addr.sin_addr.s_addr = inet_addr("127.0.0.1");

   while (1) {
      printf("Enter a string (exit to quit): ");
      fgets(buffer, sizeof(buffer), stdin);
      buffer[strcspn(buffer, "\n")] = '\0';

      sendto(sockfd, buffer, strlen(buffer), 0,
            (struct sockaddr *)&server_addr, len);
```

```
        memset(buffer, 0, sizeof(buffer));

        int n = recvfrom(sockfd, buffer, sizeof(buffer) - 1, 0,
                         NULL, NULL);

        if (n < 0) {
            perror("Receive failed");
            break;
        }

        buffer[n] = '\0';
        printf("Server response: %s\n", buffer);

        if (strcmp(buffer, "Server disconnected.") == 0)
            break;
    }

    close(sockfd);
    printf("Client socket closed.\n");

    return 0;
}
```

```
//client side

#include <stdio.h>
#include <string.h>
#include <unistd.h>
#include <arpa/inet.h>
#include <sys/socket.h>

int main() {
   int sockfd;
   char buffer[1024];
   struct sockaddr_in server_addr;
   socklen_t len = sizeof(server_addr);

   sockfd = socket(AF_INET, SOCK_DGRAM, 0);

   if (sockfd < 0) {
      perror("Socket creation failed");
      return 1;
   }

   server_addr.sin_family = AF_INET;
   server_addr.sin_port = htons(12345);
   server_addr.sin_addr.s_addr = inet_addr("127.0.0.1");

   while (1) {
      printf("Enter a string (exit to quit): ");
      fgets(buffer, sizeof(buffer), stdin);
      buffer[strcspn(buffer, "\n")] = '\0';

      sendto(sockfd, buffer, strlen(buffer), 0,
```

```
            (struct sockaddr *)&server_addr, len);

        memset(buffer, 0, sizeof(buffer));

        int n = recvfrom(sockfd, buffer, sizeof(buffer) - 1, 0,
                         NULL, NULL);

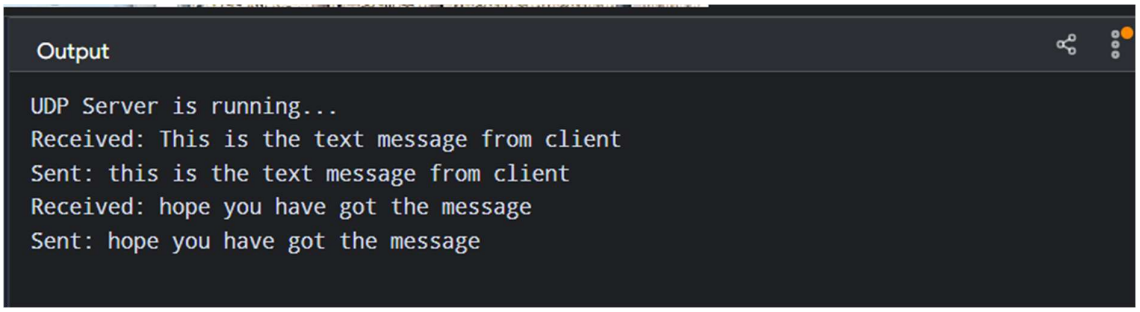
        if (n < 0) {
            perror("Receive failed");
            break;
        }

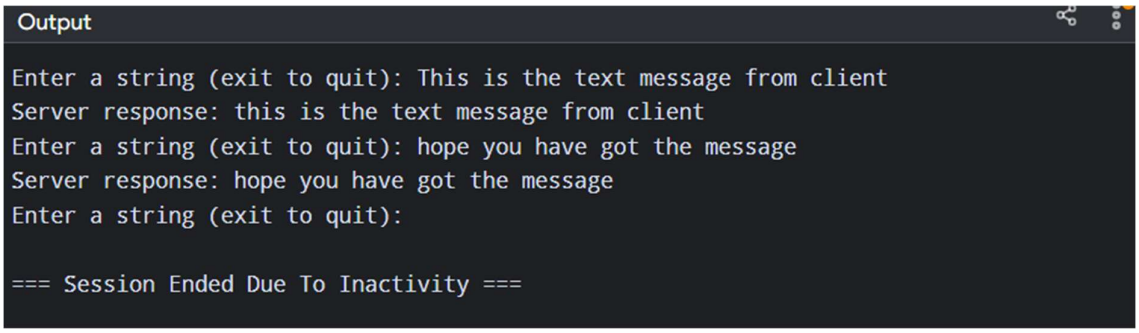
        buffer[n] = '\0';
        printf("Server response: %s\n", buffer);

        if (strcmp(buffer, "Server disconnected.") == 0)
            break;
    }

    close(sockfd);
    printf("Client socket closed.\n");

    return 0;
}
```


Output
UDP Server is running...
Received: This is the text message from client
Sent: this is the text message from client
Received: hope you have got the message
Sent: hope you have got the message


Output
Enter a string (exit to quit): This is the text message from client
Server response: this is the text message from client
Enter a string (exit to quit): hope you have got the message
Server response: hope you have got the message
Enter a string (exit to quit):
=== Session Ended Due To Inactivity ===