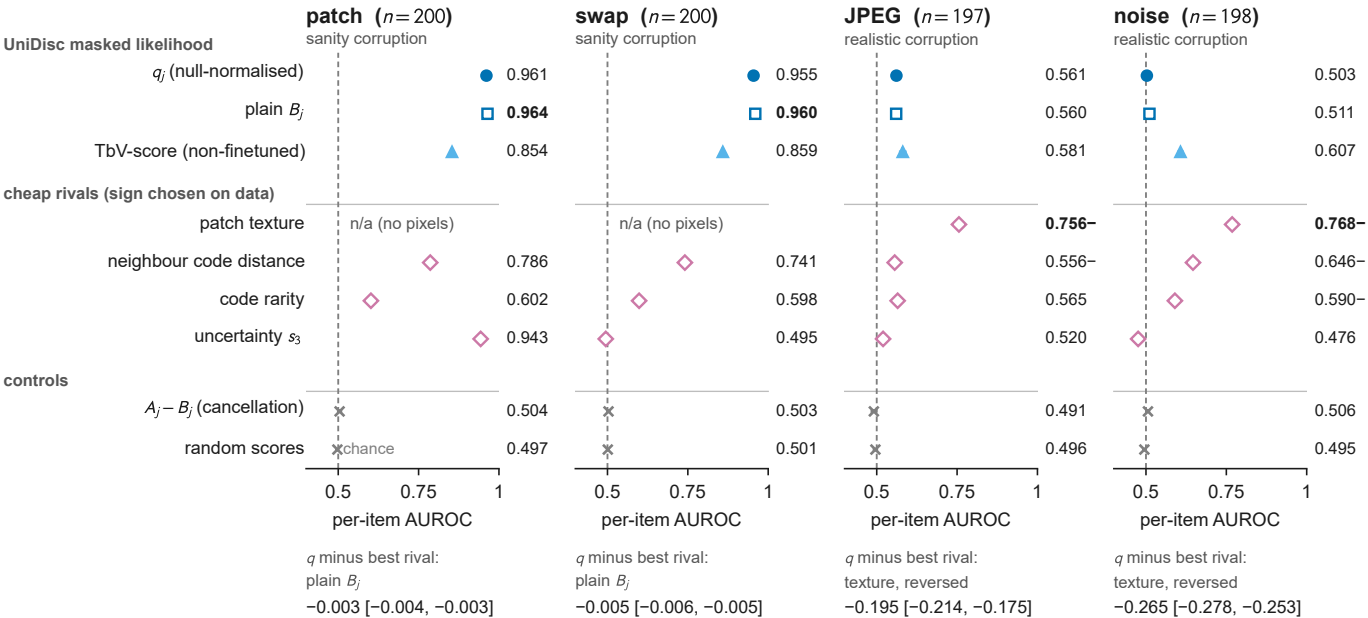

patch (n = 200)
sanity corruption
swap (n = 200)
sanity corruption
JPEG (n = 197)
realistic corruption
noise (n = 198)
realistic corruption
UniDisc masked likelihood
q_j (null-normalised)
plain B_j
TbV-score (non-finetuned)
cheap rivals (sign chosen on data)
patch texture
neighbour code distance
code rarity
uncertainty s_3
controls
$A_j - B_j$ (cancellation)
random scores
chance
n/a (no pixels)
n/a (no pixels)
0.961
0.964
0.854
0.786
0.602
0.943
0.504
0.497
0.955
0.960
0.859
0.741
0.598
0.495
0.503
0.501
0.561
0.560
0.581
0.756–
0.556–
0.565
0.520
0.491
0.496
0.503
0.511
0.607
0.768–
0.646–
0.590–
0.476
0.506
0.495
0.5
0.75
1
per-item AUROC
q minus best rival:
plain B_j
−0.003 [−0.004, −0.003]
q minus best rival:
plain B_j
−0.005 [−0.006, −0.005]
q minus best rival:
texture, reversed
−0.195 [−0.214, −0.175]
q minus best rival:
texture, reversed
−0.265 [−0.278, −0.253]