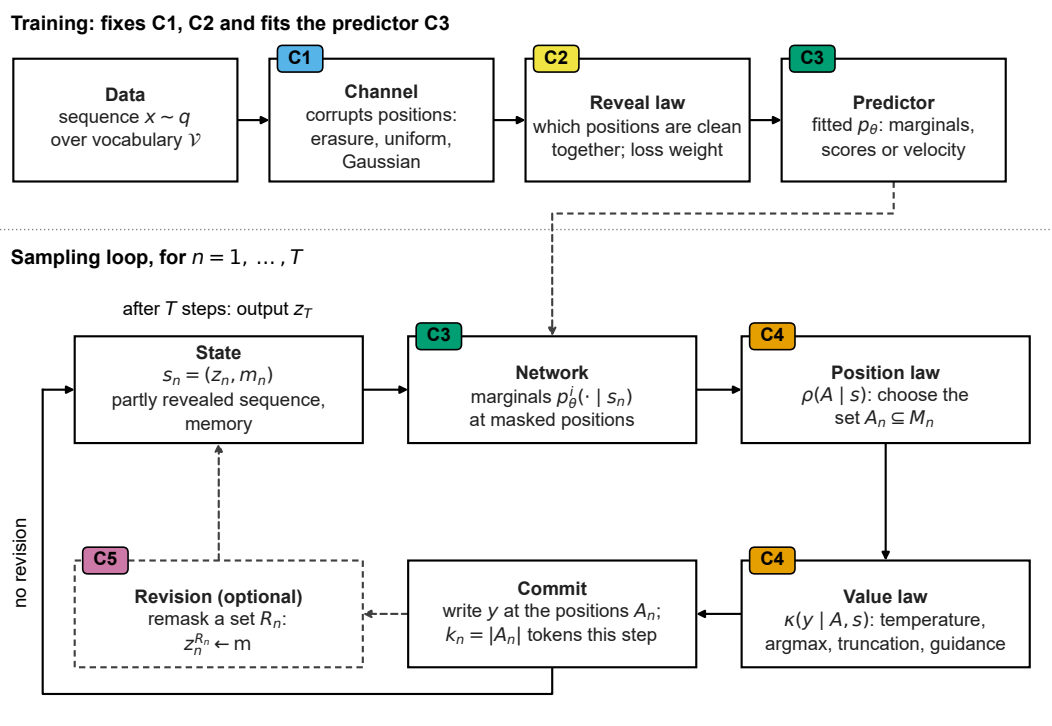

Training: fixes C1, C2 and fits the predictor C3
Data
sequence $x \sim q$
over vocabulary $\mathcal{V}$
C1
Channel
corrupts positions:
erasure, uniform,
Gaussian
C2
Reveal law
which positions are clean
together; loss weight
C3
Predictor
fitted p_θ: marginals,
scores or velocity
Sampling loop, for $n = 1, \ldots, T$
after T steps: output z_T
State
$s_n = (z_n, m_n)$
partly revealed sequence,
memory
C3
Network
marginals $p_\theta^i(\cdot \mid s_n)$
at masked positions
C4
Position law
$\rho(A \mid s)$: choose the
set $A_n \subseteq M_n$
C4
Value law
$\kappa(y \mid A, s)$: temperature,
argmax, truncation, guidance
Commit
write y at the positions A_n;
$k_n = |A_n|$ tokens this step
C5
Revision (optional)
remask a set R_n:
$z_n^{R_n} \leftarrow$ m
no revision