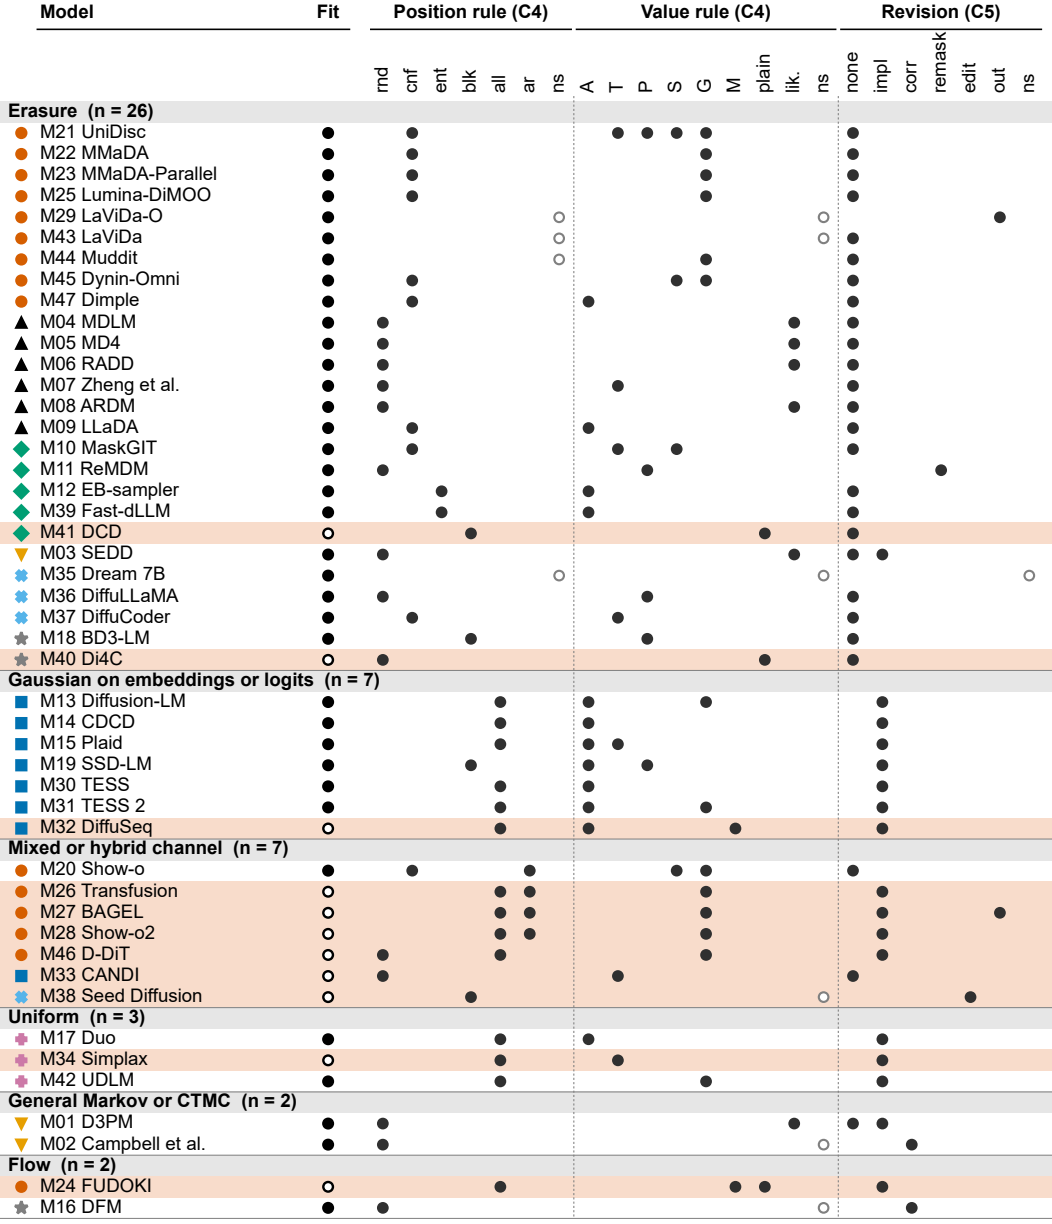

Model
Fit
Position rule (C4)
rnd
cnf
ent
blk
all
ar
ns
Value rule (C5)
A
T
P
S
G
M
plain
lik.
ns
Revision (C5)
none
impl
corr
remask
edit
out
ns
Erasure (n = 26)
M21 UniDisc
M22 MMaDA
M23 MMaDA-Parallel
M25 Lumina-DiMOO
M29 LaViDa-O
M43 LaViDa
M44 Muddit
M45 Dynin-Omni
M47 Dimple
M04 MDLM
M05 MD4
M06 RADD
M07 Zheng et al.
M08 ARDM
M09 LLaDA
M10 MaskGIT
M11 ReMDM
M12 EB-sampler
M39 Fast-dLLM
M41 DCD
M03 SEDD
M35 Dream 7B
M36 DiffuLLaMA
M37 DiffuCoder
M18 BD3-LM
M40 Di4C
Gaussian on embeddings or logits (n = 7)
M13 Diffusion-LM
M14 CDCD
M15 Plaid
M19 SSD-LM
M30 TESS
M31 TESS 2
M32 DiffuSeq
Mixed or hybrid channel (n = 7)
M20 Show-o
M26 Transfusion
M27 BAGEL
M28 Show-o2
M46 D-DiT
M33 CANDI
M38 Seed Diffusion
Uniform (n = 3)
M17 Duo
M34 Simplax
M42 UDLM
General Markov or CTMC (n = 2)
M01 D3PM
M02 Campbell et al.
Flow (n = 2)
M24 FUDOKI
M16 DFM
Family: unified multimodal and hybrids
other (flow, block, distillation)
general discrete
Gaussian, embedding or simplex
absorbing
sampler-only
uniform
adapted from autoregressive
Fit: fits
fits partly (tinted row)
not stated in the parts read (ns)