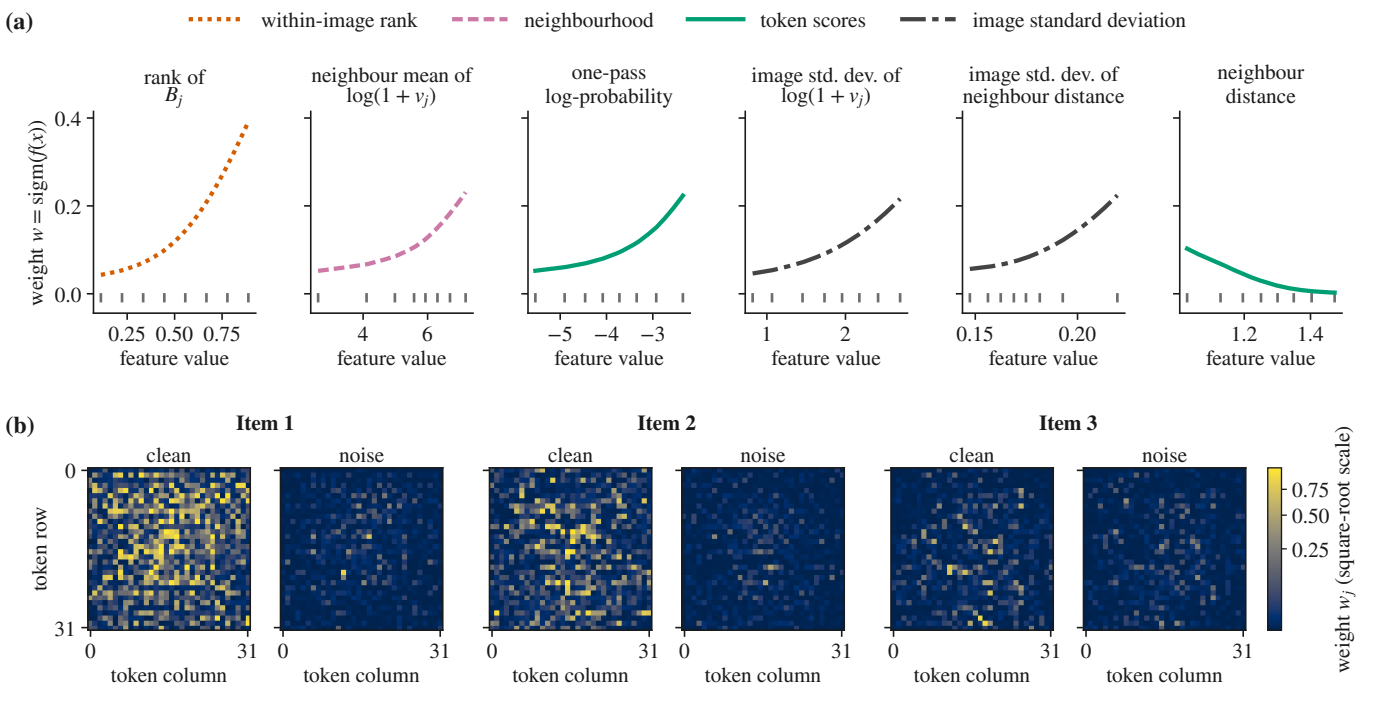
(a)
within-image rank
neighbourhood
token scores
image standard deviation
rank of $B_j$
neighbour mean of $\log(1+v_j)$
one-pass log-probability
image std. dev. of $\log(1+v_j)$
image std. dev. of neighbour distance
neighbour distance
weight $w = \mathrm{sigm}(f(x))$
0.0
0.2
0.4
0.25 0.50 0.75
4 6
−5 −4 −3
1 2
0.15 0.20
1.2 1.4
feature value
(b)
Item 1
Item 2
Item 3
clean
noise
token row
0
31
token column
0.75
0.50
0.25
weight $w_j$ (square-root scale)