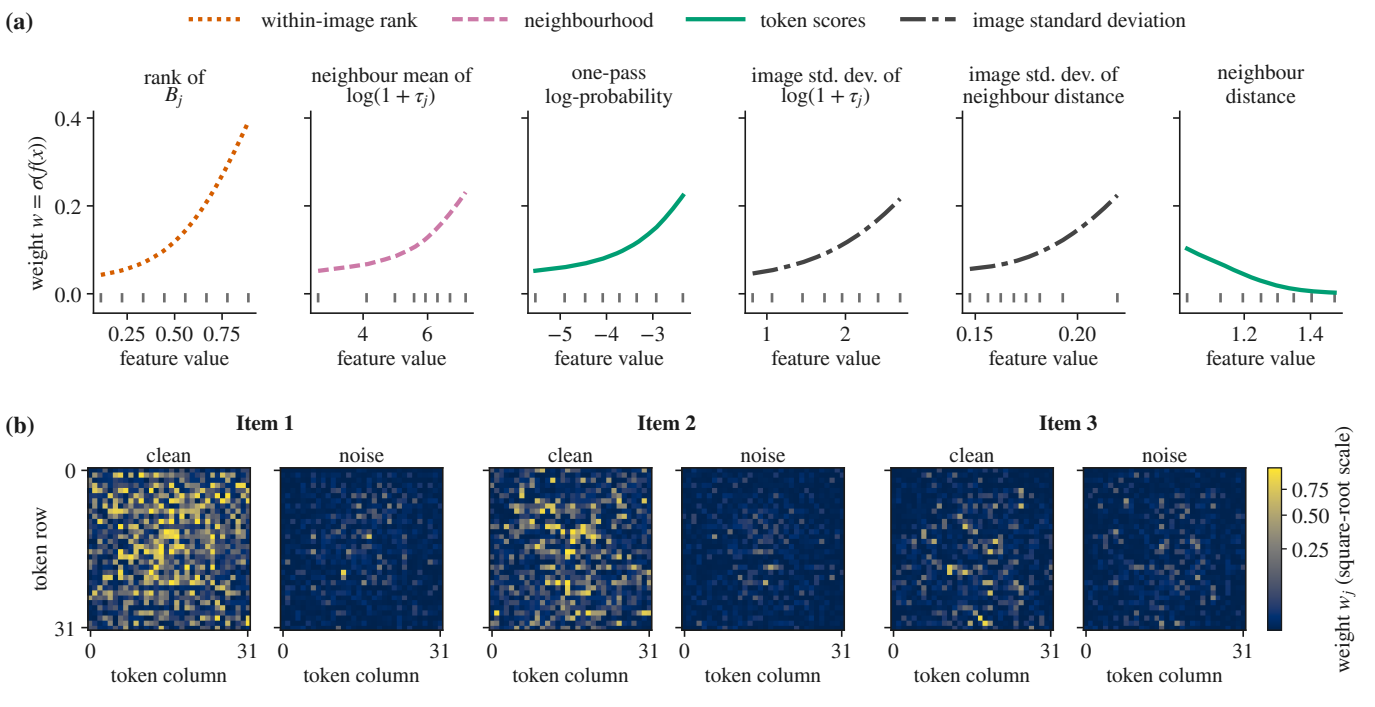
(a)
within-image rank
neighbourhood
token scores
image standard deviation
rank of B_j
neighbour mean of $\log(1+\tau_j)$
one-pass log-probability
image std. dev. of $\log(1+\tau_j)$
image std. dev. of neighbour distance
neighbour distance
weight $w = \sigma(f(x))$
0.0
0.2
0.4
0.25 0.50 0.75
4 6
−5 −4 −3
1 2
0.15 0.20
1.2 1.4
feature value
(b)
Item 1
Item 2
Item 3
clean
noise
token row
token column
0
31
weight w_j (square-root scale)
0.25
0.50
0.75