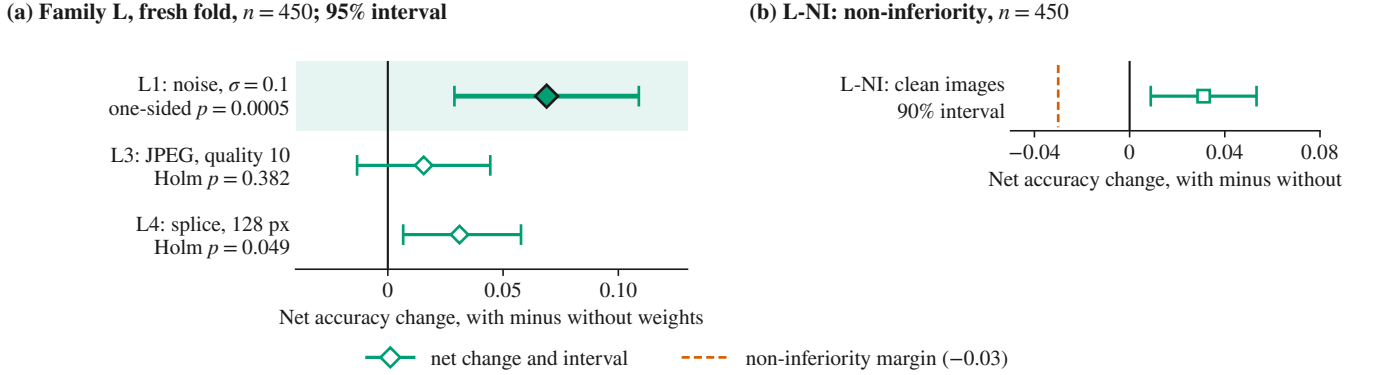
(a) Family L, fresh fold, n = 450; 95% interval
L1: noise, σ = 0.1
one-sided p = 0.0005
L3: JPEG, quality 10
Holm p = 0.382
L4: splice, 128 px
Holm p = 0.049
0
0.05
0.10
Net accuracy change, with minus without weights
(b) L-NI: non-inferiority, n = 450
L-NI: clean images
90% interval
−0.04
0
0.04
0.08
Net accuracy change, with minus without
net change and interval
non-inferiority margin (−0.03)