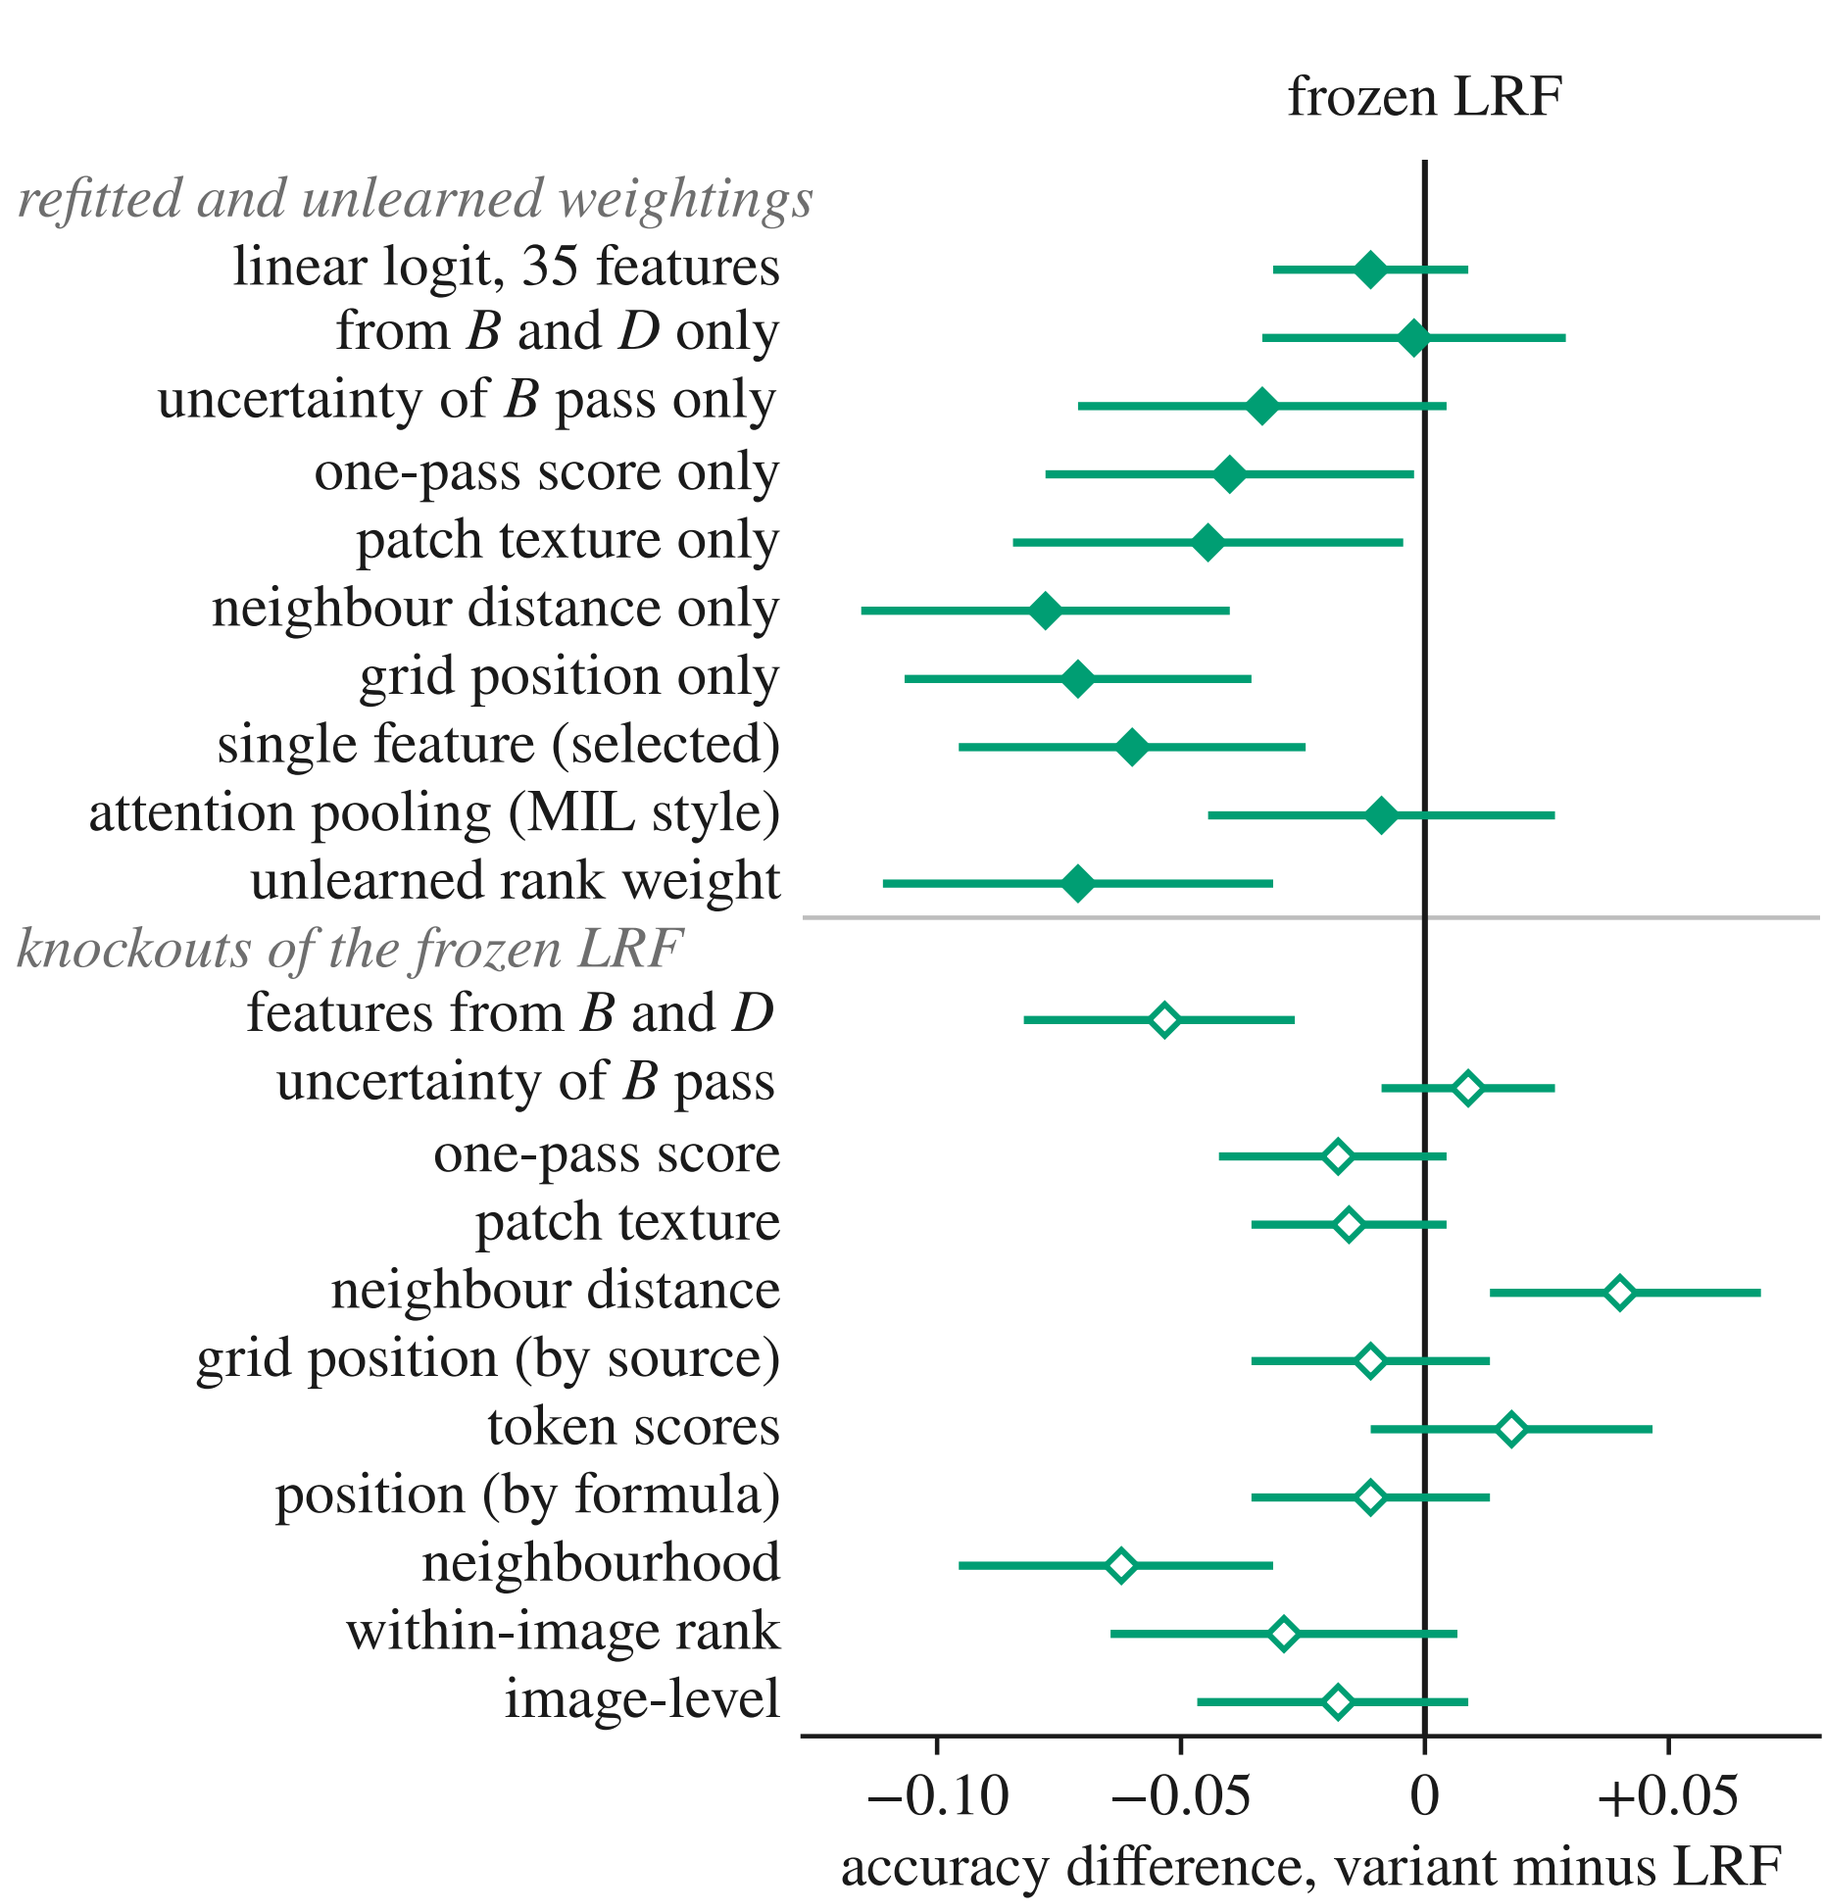
frozen LRF
refitted and unlearned weightings
linear logit, 35 features
from B and D only
uncertainty of B pass only
one-pass score only
patch texture only
neighbour distance only
grid position only
single feature (selected)
attention pooling (MIL style)
unlearned rank weight
knockouts of the frozen LRF
features from B and D
uncertainty of B pass
one-pass score
patch texture
neighbour distance
grid position (by source)
token scores
position (by formula)
neighbourhood
within-image rank
image-level
−0.10
−0.05
0
+0.05
accuracy difference, variant minus LRF