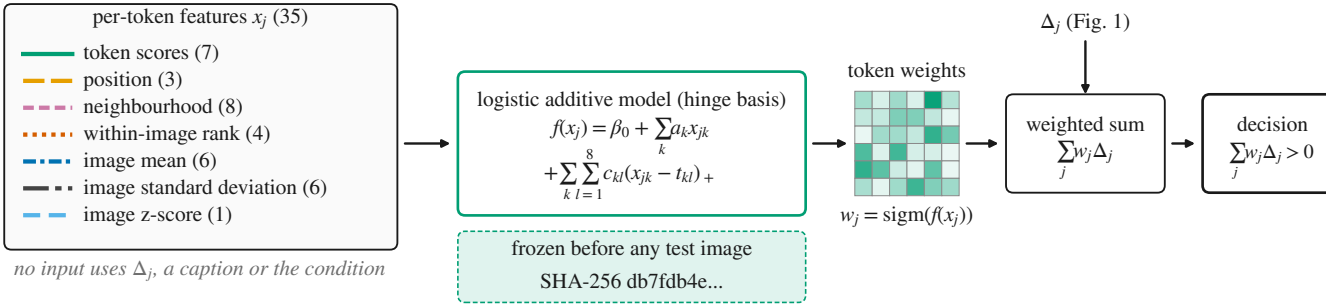
per-token features x_j (35)
token scores (7)
position (3)
neighbourhood (8)
within-image rank (4)
image mean (6)
image standard deviation (6)
image z-score (1)
no input uses Δ_j, a caption or the condition
logistic additive model (hinge basis)
$f(x_j) = \beta_0 + \sum_k a_k x_{jk}$
$+ \sum_k \sum_{l=1}^{8} c_{kl}(x_{jk} - t_{kl})_+$
frozen before any test image
SHA-256 db7fdb4e...
token weights
$w_j = \mathrm{sigm}(f(x_j))$
Δ_j (Fig. 1)
weighted sum
$\sum_j w_j \Delta_j$
decision
$\sum_j w_j \Delta_j > 0$