



Enterprise Deployment — Architecture Brief

How EraseAI enforces AI data governance across corporate LAN, WiFi/WAN, remote, and offline use — on the customer's own infrastructure.

Design principle

Enforcement travels with the device; the network is the backstop; the policy brain lives on the customer's own servers. EraseAI does not depend on the network to enforce — the corporate network simply guarantees that the only road to AI tools runs through EraseAI.


1 TWO ENFORCEMENT LAYERS

Layer 1 — Endpoint (primary control). The EraseAI browser extension / lightweight agent inspects at the prompt — the only point where sensitive data can be caught *before* it leaves. Force-installed via the tools IT already runs (Group Policy, Intune, Chrome Enterprise, MDM); identity via corporate SSO, so every event is tied to a user.

Layer 2 — Network (backstop). The existing switches and egress firewall enforce one rule: direct traffic to AI endpoints is blocked unless it comes from a device running the EraseAI agent or is routed through the EraseAI gateway. Catches unmanaged devices, scripts, and personal laptops on corporate WiFi. DNS filtering or an egress proxy rule — no re-cabling.

Policy server on customer infrastructure. Rules, audit logs, and the admin dashboard run on the customer's own servers (on-prem or private cloud). Prompt content never leaves their environment for inspection.

2 REFERENCE ARCHITECTURE

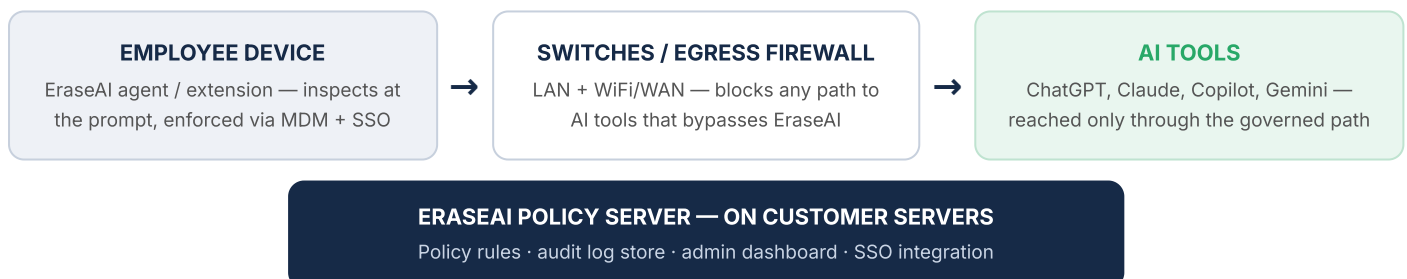



3 COVERAGE ACROSS CONNECTIVITY STATES

Employee state	What happens
On LAN, online	Endpoint agent inspects at the prompt; the network blocks anything that bypasses it. Full real-time logging.
On WiFi / WAN, online	Identical — WiFi is another path through the same switches and egress point, so both layers apply unchanged.
Remote, online	The endpoint agent enforces on its own, independent of network. Policies and audit logs sync with the policy server over the internet or corporate VPN.
Offline	Cloud AI tools are unreachable, closing the live leak path. The agent keeps enforcing against local AI models using its cached policy; logs queue and sync on reconnect.

4 OFFLINE DESIGN

Local policy cache. The agent evaluates prompts on-device against the latest cached policy — no server round-trip for a block/allow decision, and zero added latency online.

Queued audit trail. Events are stored locally and synced when connectivity returns; nothing is lost from the log trail.

Fail-closed by default. If the agent cannot reach the policy server beyond a configured window, AI tool access is blocked until re-sync. Admins may choose fail-open for low-sensitivity groups.

5 DEPLOYMENT PATH

1. **Install the policy server** on customer infrastructure (on-prem or private cloud) and connect corporate SSO.
2. **Push the endpoint agent** to managed devices via Group Policy / Intune / Chrome Enterprise / MDM.
3. **Add egress rules** at the existing firewall: AI endpoints reachable only via EraseAI-governed paths.
4. **Pilot with one department**, tune policies, then roll out organisation-wide.

"We don't depend on your network to enforce — the control travels with the device. Your switches just make sure the only road to AI tools runs through us, and the policy brain lives on your own servers."

EraseAI — prevention at the prompt, on your infrastructure.