

Predation rates based on dummy caterpillars

Shirin Shoghli, Shahrzad Torabi, Sanaz Bayat, Maryam Gheibi, Mozhdeh Ramezani Dastjerdi

December 19, 2023

4 Week 06 (December 7 - December 21)

Our 3 datasets:

<https://www.bexis.uni-jena.de/ddm/data/Showdata/31113>

<https://www.bexis.uni-jena.de/ddm/data/Showdata/24246>

<https://www.bexis.uni-jena.de/ddm/data/Showdata/25807>

Findable

Identifier and Metadata

Globally Unique Identifier:

Dataset Unique :

<https://www.bexis.uni-jena.de/ddm/data/Showdata/31113>

<https://www.bexis.uni-jena.de/ddm/data/Showdata/24246>

<https://www.bexis.uni-jena.de/ddm/data/Showdata/25807>

Provided on their portal named BExIS

Rich Data:

Yes, rich data contains abundant metadata that offers detailed information.

Some important metadata elements include titles, abstracts, and project names.

The ID, which is a local/internal identifier, holds great importance in rich metadata.

The screenshot shows the BEIS website interface. At the top, there's a header with the logo and navigation links. Below it, a breadcrumb trail indicates the dataset path. The main content area displays the dataset title and a dropdown menu for version selection (currently showing '4 Metadata edited (16.11.2021)'). On the right, there are buttons for 'Download Dataset' and 'Download Citation'. Below this, a tabbed interface shows 'Metadata' selected, with sub-tabs for 'General', 'Contacts', 'Coverage', 'Methods', 'Keywords', and 'Data Type And Status'. The 'General' tab is active, showing a form with fields for Title, Abstract, Project name, Metadata creation date, Metadata last modification date, Data last modification date, ID, Version, Metadata schema, License, and Funder. The 'Title' field contains the dataset name. The 'Abstract' field contains a paragraph about the study. The 'Project name' is 'Arthropods (core)'. The 'Metadata creation date' is '10/26/2021 2:38:59 PM'. The 'Metadata last modification date' is '11/16/2021 11:00:16 AM'. The 'Data last modification date' is '10/26/2021 2:45:40 PM'. The 'ID' is '31113'. The 'Version' is '4'. The 'Metadata schema' is 'Biodiversity Exploratories Metadata Schema 3.0'. The 'License' is 'CC BY 4.0'. The 'Funder' is 'German Research Foundation'.

Metadata-Data Relationship:



The connection between metadata and data is explained clearly in our datasets.

When searching on Google, the dataset cannot be found using the metadata, which includes the ID and project name.

Registration or Indexing:

The dataset is not effectively indexed by search engines, meaning that searching for it using the dataset name on browsers yields results.

The screenshot shows a Google search results page. The search bar contains the query 'Predation measured as predation marks by arthropods, birds, rodents and slugs on dun'. The results are sorted by 'All' and show several search results. The first result is from 'science' and is titled 'Land-use components, abundance of predatory arthropods ... - Scien...'. The second result is also from 'science' and is titled 'Land-use components, abundance of predatory arthropods ... - Scien...'. The third result is from 'dora.lib4ri.ch' and is titled 'Environment, 270-271, 84-92. https://doi.org/10.1016/j.agee.2018.1...'. The fourth result is from 'ncbi.nlm.nih.gov' and is titled 'Animal-Mediated Ecosystem Process Rates in Forests and Grassland...'. The fifth result is from 'frontiersin.org' and is titled 'Frontiers | Predation pressure by arthropods, birds, and rodents is ...'. The search results are displayed in a list format with links to the full text of each article.

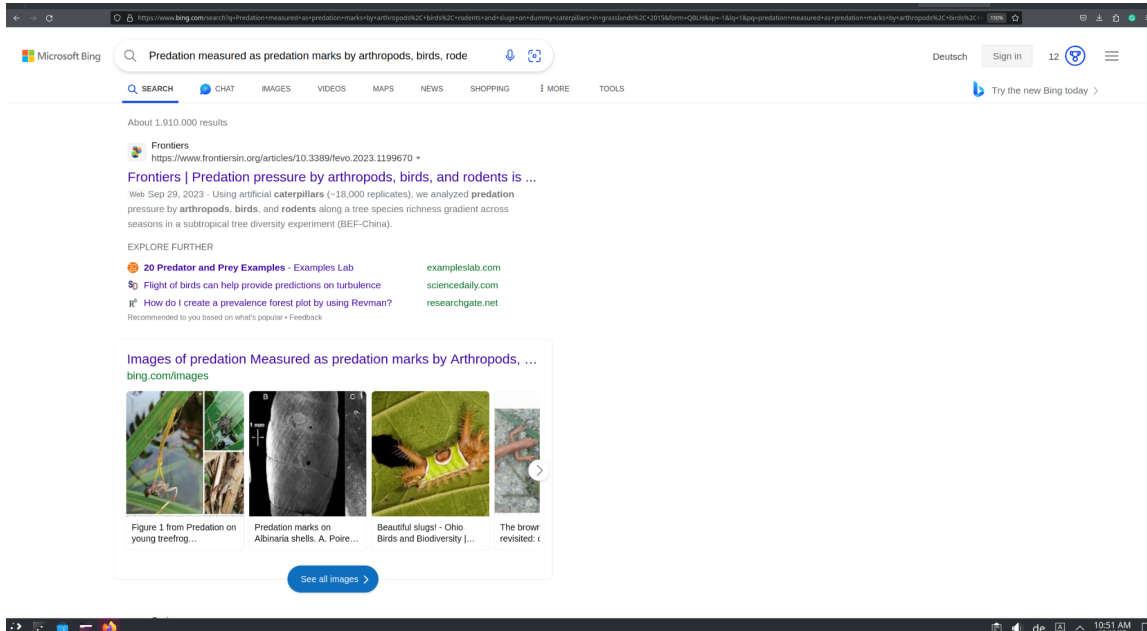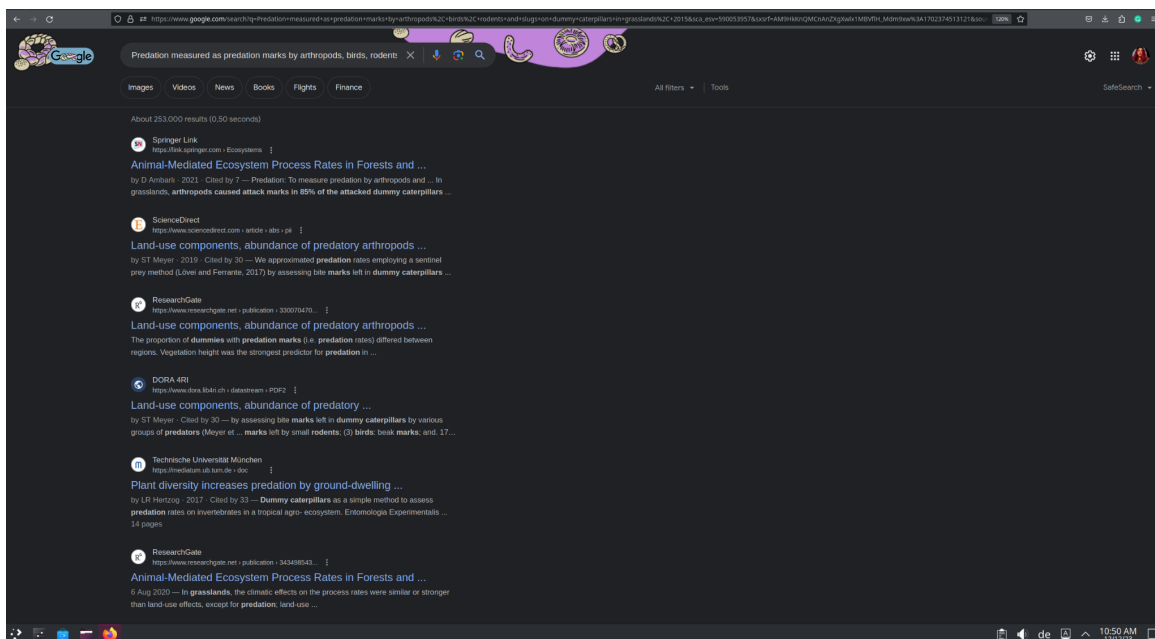

Challenges Encountered:

The challenges encountered include the absence of a global identifier, leading to a lack of indexing or registration, despite the presence of a metadata-data relationship.

Proposed Improvements:

To address the challenges, proposed improvements include leveraging collaborative efforts with domain experts and SEO optimizers to enhance the dataset's indexing. Additionally, assigning a persistent identifier, such as a DOI (Digital Object Identifier), can enhance the discoverability and registration of the dataset.

Overall Reflection:


The findability of data in the Biodiversity Exploratories Information System (BExIS) datasets faces challenges. While each dataset has a unique identifier and rich metadata, the datasets are not effectively indexed by search engines. Searching for the datasets using their metadata or names does not yield results. To improve findability, it is proposed to establish a global identifier, such as a DOI, and collaborate with domain experts and

SEO optimizers to enhance indexing and discoverability. These improvements would ensure that the datasets can be easily found and accessed by researchers and users interested in the data.

Accessible


Protocol for Retrieval:

- It has a specific URL
- Have specific HTTPS
- <https://www.bexis.uni-jena.de/ddm/data/Showdata/31113>

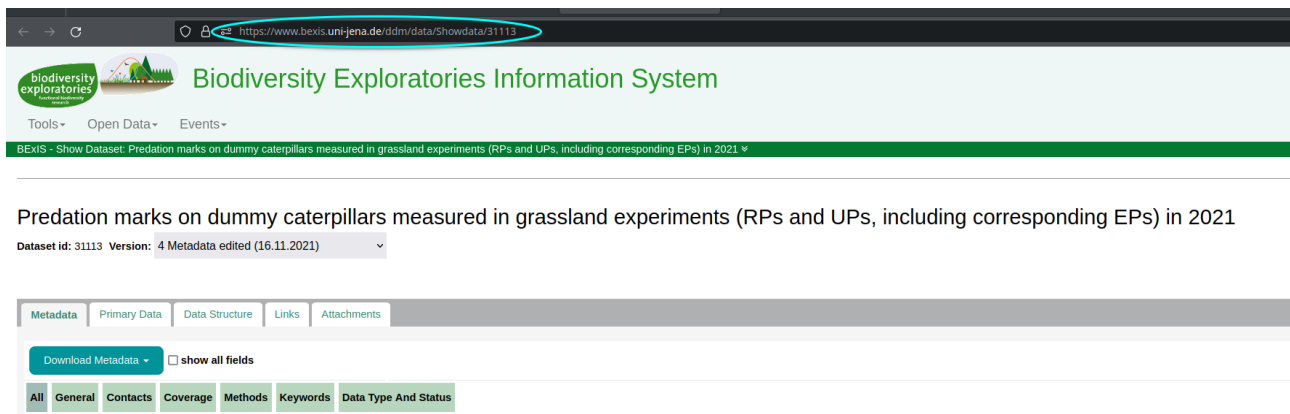


Protocol Openness, Authentication and Authorization Procedure:

- The download is accessible with the given protocol in various types (as we mentioned before)
- It is open so no authentication is needed to download it (no login needed) for viewing but for modification, users need to log in to the Bexis website.

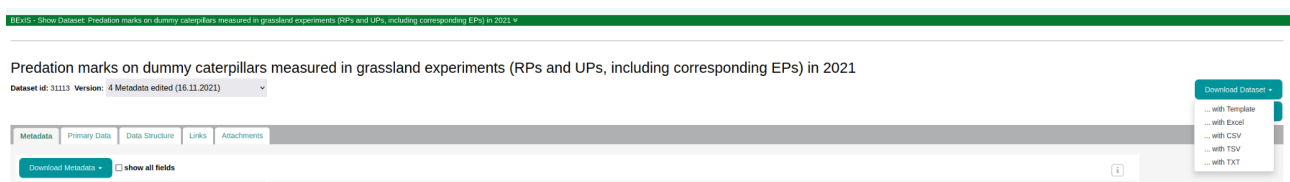

Log in page:

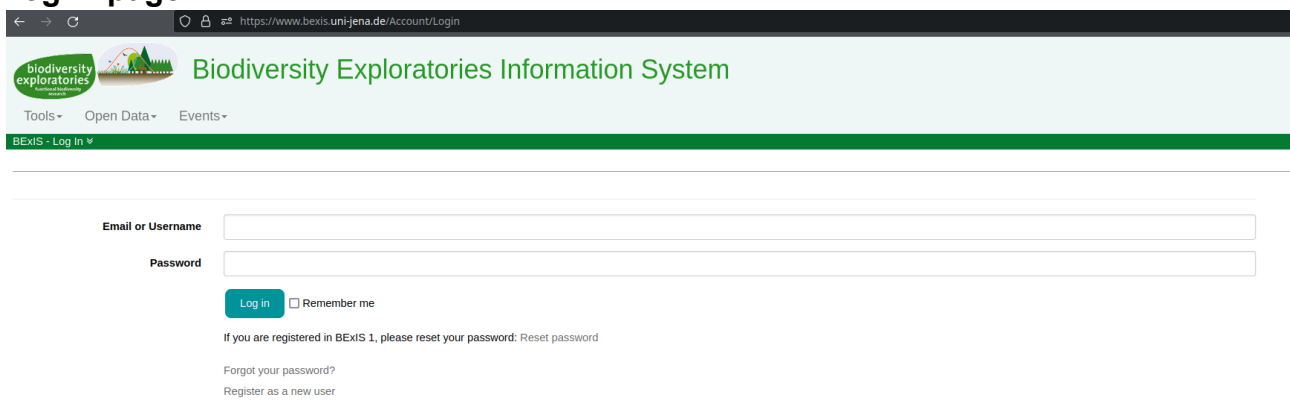

Registration page:

← → ↻ https://www.bexis.uni-jena.de/Account/Register

biodiversity exploratories Biodiversity Exploratories Information System

Tools ▾ Open Data ▾ Events ▾

Register ▾

Create a new account.

Username

Email

Password

Confirm password

☐ I accept Terms and Conditions.

[Please read the Privacy Policy.](#)

[Register](#)

Powered by **BEXIS**

[Privacy Policy](#) [Terms and Conditions](#) [Contact Us](#) [Imprint](#)

Accessible Metadata:

- The metadata for the dataset is easily accessible within the website.
- Can be in touch with the contact person in case of misunderstanding.

← → ↻ https://www.bexis.uni-jena.de/ddm/data/Showdata/31113

biodiversity exploratories Biodiversity Exploratories Information System

Tools ▾ Open Data ▾ Events ▾

BEXIS - Show Dataset: Predation marks on dummy caterpillars measured in grassland experiments (RPs and UPs, including corresponding EPs) in 2021 ▾

▼ **Contacts**

Metadata creator ⓘ

Data creator ⓘ

Data collector ⓘ

Project leader ⓘ

▼ **Contact Person**

Name ⓘ

Email ⓘ

Institute ⓘ

Street ⓘ

Postal code ⓘ

City ⓘ

URL ⓘ

Challenges Encountered:

- No significant challenge.
 - Datasets however are available that can cause distributed denial-of-service (DDoS)
- DDoS: A distributed denial-of-service (DDoS) attack occurs when multiple systems flood the bandwidth or resources of a targeted system, usually one or more web servers. A DDoS attack uses more than one unique IP address or machines, often from thousands of hosts infected with malware.

Proposed Improvements:

- Using third-party vendors to prevent DDoS.

Overall Reflection:

The dataset available on the Biodiversity Exploratories Information System (BEXIS)

platform can be accessed through a specific URL (<https://www.bexis.uni-jena.de/ddm/data/Showdata/31113>) using the secure HTTPS protocol. Users can download the dataset in various formats without the need for authentication or login, although modifications require logging into the Bexis website. The metadata associated with the dataset is easily accessible on the website, and contact information is provided for further assistance. While no significant challenges are mentioned, there is a suggestion to employ third-party vendors to mitigate potential distributed denial-of-service (DDoS) risks. Overall, the dataset is openly available and retrievable, with appropriate protocol adherence and accessibility measures in place.

Contributions

Shirin Shoghli

Checking the dataset for findability properties (rich data, indexing, relationship between metadata and data and Globally Unique Identifier), checking the dataset for accessibility properties (Protocol for Retrieval, Protocol Openness, Authentication and Authorization Procedure and accessible metadata), writing the summary for both of them

Shahrzad Torabi

Checking the dataset for findability properties (rich data, indexing, relationship between metadata and data and Globally Unique Identifier), checking the dataset for accessibility properties (Protocol for Retrieval, Protocol Openness, Authentication and Authorization Procedure and accessible metadata), writing the summary for both of them

Sanaz Bayat

Checking the dataset for findability properties (rich data, indexing, relationship between metadata and data and Globally Unique Identifier), checking the dataset for accessibility properties (Protocol for Retrieval, Protocol Openness, Authentication and Authorization Procedure and accessible metadata), writing the summary for both of them

Maryam Gheibi

Checking the dataset for findability properties (rich data, indexing, relationship between metadata and data and Globally Unique Identifier), checking the dataset for accessibility properties (Protocol for Retrieval, Protocol Openness, Authentication and Authorization Procedure and accessible metadata), writing the summary for both of them

Mozhdeh Ramezani Dastjerdi

Checking the dataset for findability properties (rich data, indexing, relationship between metadata and data and Globally Unique Identifier), checking the dataset for accessibility properties (Protocol for Retrieval, Protocol Openness, Authentication and Authorization Procedure and accessible metadata), writing the summary for both of them