

# Patient Triage System

Interactively storing and serving patient data based on priority.

|   |          |
|---|----------|
| <b>Overview</b>                         | <b>1</b> |
| <b>Learning Goals:</b>                  | <b>2</b> |
| <b>Project Specification:</b>           | <b>2</b> |
| <b>Background</b>                       | <b>2</b> |
| <b>Maintaining the Heap Property</b>    | <b>3</b> |
| <b>Code Structure</b>                   | <b>3</b> |
| <b>Tasks</b>                            | <b>4</b> |
| <b>Testing</b>                          | <b>5</b> |
| <b>Export and Submit</b>                | <b>6</b> |
| <b>Academic Honesty Policy Reminder</b> | <b>7</b> |

---

## Overview

For this project, you will implement a futuristic automated emergency room (ER) triage system. Your system will receive data in the form of patient and injury pairs over time and automatically assign patients to doctors as the resources become available depending on the severity of the patient's injury.

To accomplish this, you will implement a data structure called a *priority* queue – more specifically, a *heap-based priority queue*. A priority queue is similar to a stack or a queue in that it stores and serves data in a specific order. It differs from these two data structures in that the order of data insertion does not affect the order of data serving (though the data clearly must be added to the structure before it can be served). Instead, the order of data serving is based on a *priority* of each datum – in this scenario, the priority of each patient is commensurate with the severity of their injury or age of the patient (depending on the comparator being used). Importantly, a priority queue accomplishes this task in an efficient way. Despite this specific setting, your implementation will be generic enough to work with all types of data and could be applied to other real world problems.

---

# Learning Goals:

- Implement an efficient abstract priority queue using an array-based heap.
- Write code adhering to the provided style guide.
- Use abstract comparators in a meaningful context.
- Demonstrate your ability to read and understand a specification by implementing it.
- Continue developing your ability to test and debug your code.

# Project Specification:

## Background

In this project, you will be implementing the core of an automatic ER triage system. Essentially, a medical triage is a system in which patients come and go and its behavior is similar to a processor executing tasks following a priority schedule. Patients will arrive one at a time with varying severity of conditions. The system will also provide the possibility of ordering by patient age instead of their condition. With a finite number of doctors and ER beds, we must decide which patients get treated in which order automatically. Naturally, we want the system to have the patients with the more severe conditions be treated first. To accomplish this, you will implement a priority queue using an array-based heap.

The main interface and data structure in this program is a priority queue. Patients are enqueued when they arrive and dequeued as they are treated and released. The priority is on the patient's condition, which has these levels in increasing order of priority: LIGHT, MILD, SEVERE, CRITICAL. Thus, all CRITICAL patients would be treated first, SEVERE patients second, etc. To offer more flexibility, this application can also prioritize patients by age.

The priority queue is implemented with a heap in this application. A heap is a binary tree which is organized based on a *heap-invariant* (the heap ordering property) defined on the priority of each element in the tree. In our case, each element in the tree will represent a specific patient with priority commensurate with the severity of the injury (or their age if that is the chosen priority). We want the patients with worse conditions to be treated first, so our heap invariant is: every child node will have less than or equal severity (priority) than its parent. Therefore, it can be inferred that the root node will always have the highest priority of any element in the heap. This describes a max heap. We must maintain the heap-invariant as patients arrive, enqueued onto the priority queue (added to the heap) and are treated, dequeued from the priority queue (removed from the heap). Note that in this program, the heap can also be configured to function as a min heap. In that case, the root has the lowest priority, and child nodes have priority less than or equal to their parent.

While there are many ways to store a binary tree in memory, we opt for the space efficient array-based allocation. The array implementation also provides a simple way to navigate the heap by calculating parent and child indexes.

## Maintaining the Heap Property

As stated above, there are two cases when the internal structure of the heap might need to change to maintain the heap invariant: adding elements onto the heap and removing elements off of the heap. Since the `Heap` class is implementing a priority queue, it will implement the `PriorityQueue` interface. Therefore, the method for adding a new data element to the `Heap` will be the `enqueueElement` method, and the method for removing a data element will be `dequeueElement`.

**Adding an element to the heap.** When an element is added to the heap, in order to maintain the heap property, this procedure is implemented in the `bubbleUp` method. We suggest a recursive approach.

**Removing an element from the heap.** Only the root is removed from a heap. When removing the root from the heap, we check the heap invariant property is satisfied. This procedure is implemented in the `bubbleDown` method. We suggest a recursive approach.

## Code Structure

In this context, let's briefly analyze some of the classes in the code structure (see Figure 1).

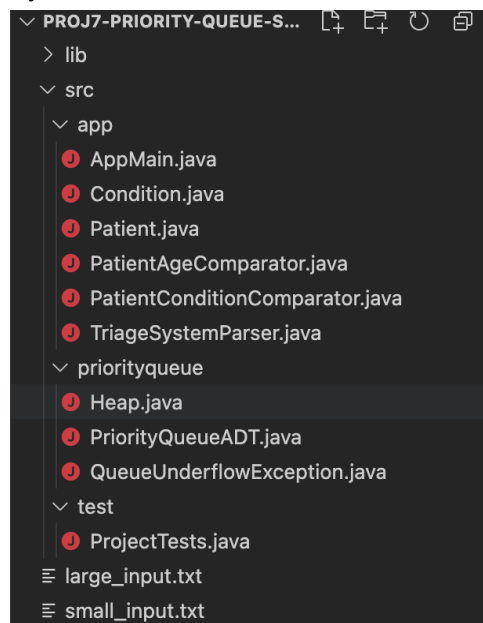


Figure 1: Code structure.

The `Heap.java` file contains the definition of a `Heap` class, which is to be implemented by yourself. The class already has standard methods to help you during your fun journey to implement a top notch priority queue for the triage system. Before diving into the assignment, it is worth mentioning some cool stuff about your `Heap` implementation. First, it uses Java generics to make the data structure code be valid regardless of which type of elements are stored in it, i.e a `Heap<int>` stores integer values, a `Heap<Patient>` stores patient objects.

Second, the Heap accepts a comparator object to define the order (priority) of its elements. Finally, the Heap accepts the boolean flag `isMaxHeap` to define if the instance will be a max heap, i.e highest priority first, or a min heap, i.e lowest priority first.

The `Patient.java` file contains all the relevant patient information for your triage. You do not need to implement anything on this file, although you'll probably need to check it multiple times during the assignment. Patients' health conditions are defined in the `Condition.java` file with an `Enum`. This is an elegant way to define the constant values of conditions that the triage system uses and, once more, you don't need to write anything in it.

The `TriageSystemParser` class implements all the necessary operations to parse a triage input data file (for e.g. `small_input.txt` or `large_input.txt`) and it is also implemented for you. It reads the entire file to memory and stores its content in the `patients` `ArrayList` attribute. Another important thing about this file is that it serves as a practical example of the **code style guide** you must follow - removing unnecessary lines of code; proper indenting; optimal use of blank lines and spaces for operators; use of camelCase for variable/parameter and method names; descriptive variable and method names.

### Comparator Interface

The program makes use of the Java `Comparator` interface. Like the `Comparable` interface, it allows data to be compared and thus ordered. `Comparator` is more flexible as the way data can be compared can be implemented by different `Comparator` classes. These are the two `Comparators` used in this program:

### `PatientAgeComparator.java`

The `compare` method performs the comparison between the age attribute of patients `pt1` and `pt2`. The age of a patient is an integer.

### `PatientConditionComparator.java`

The `compare` method for this `Comparator` performs the comparison between the condition attribute of patients `pt1` and `pt2`. The Condition levels in increasing severity are: `LIGHT`, `MILD`, `SEVERE`, `CRITICAL`. These are modeled by an `Enum` Object, which encapsulates data types that model a set of discrete values. (take a look at the `ordinal` method for [Enum](#)). A `LIGHT` condition is considered less than a `CRITICAL` condition, for example.

All classes that implement `Comparator` must implement the `compare` method. You can find more about the `Comparator` interface here [Comparator \(Java Platform SE 8\)](#).

## Tasks

To complete the assignment, you must implement all of the methods, marked with a `TODO` tag in the source code. **Do not modify any existing instance variables, method signatures, or**

**any of the starter code provided. Do not add any new classes to the project. You may add any additional instance variables or helper methods you wish. Do not import any additional and/or external code libraries.**

## Heap.java

Here are some additional notes.

```
public Heap(Comparator<T> comparator, boolean isMaxHeap)
```

The constructor initializes the type of `Comparator` to be used as well as a boolean parameter which designates whether the `Heap` class will act as a min or max heap. Any other class variables can also be initialized in the constructor, such as the array that will implement the heap. The array must be generically typed so it can store any type of `Object`, and it must be initialized to `INIT_SIZE`.

Methods defined in the `PriorityQueueADT` interface must be implemented in the `Heap` class. See the comments in the starter code.

**We suggest you implement the following as helper methods. These can be called by other methods to carry out the tasks of `enqueueElement`, `dequeueElement`, `bubbleUp`, and `bubbleDown`. Note: We do not test the private methods.**

```
private int getLeftChildOf(int parentIndex)
private int getRightChildOf(int parentIndex)
private int getParentOf(int childIndex)
private void swapIndices(int index1, int index2)
private void expandCapacity() // since the array may need to be lengthened.
```

## Testing

We suggest that you develop your code by debugging from the main method instead of the unit tests. You can alter the main method code to fully test your `Heap` class methods. Once you have a working program, run the unit tests, and if they pass, submit the project to Gradescope.

Ways you can test your code from the main method in `AppMain.java`:

1. Initially, the code reads in data from the `small_input.txt` file. You should open that file just to see how the data for patients is stored. You can also test your code on the `large_input.txt` file as well.
2. The `Comparator` classes can be set to prioritize age or condition. Try both to test that your code is correctly ordering on that priority.
3. Change the priority of the queue from max to min by setting `isMaxHeap` to `false`. Check that your code works correctly as a `minHeap`.

4. Use the debugger to visualize the way data is stored on the array and how it is adjusted upon `enqueueElement` and `dequeueElement` operations. Note that the array length will be  $\geq$  the amount of data in the heap. The array capacity will have to be expanded when full.

Here is the output for the data in `small_input.txt`, based on severity of patient condition. When the conditions of two patients are the same, then the oldest one comes first.

```
Patient: Shanell, Zacari, 88, CRITICAL
Patient: Najwa, Yonael, 70, SEVERE
Patient: Aryahi, Darbi, 55, SEVERE
Patient: Laekyn, Randolph, 96, LIGHT
Patient: Izac, Fidencia, 66, LIGHT
```

Here is the output for the data in `small_input.txt` ordered on patient age from youngest to oldest.

```
Patient: Aryahi, Darbi, 55, SEVERE
Patient: Izac, Fidencia, 66, LIGHT
Patient: Najwa, Yonael, 70, SEVERE
Patient: Shanell, Zacari, 88, CRITICAL
Patient: Laekyn, Randolph, 96, LIGHT
```

## Export and Submit

### Step 1: Export your project

Use the Archive extension or other means to create the correct zip file. If your zip file is not in the correct form, the autograder will not process your code and you will not receive any credit.

### Step 2: Submit the zip file to Gradescope

Log into Gradescope, select the assignment, and submit the zip file for grading.

The autograder will not run successfully if you do not submit a **correctly formatted zip file**- it has to have the same **names and directory structure as described above**. The autograder will also not run if your code **does not compile**, or if you **import libraries** that were not specifically allowed in the instructions.

**Remember, you can re-submit the assignment to gradescope as many times as you want, until the deadline. If it turns out you missed something and your code doesn't pass 100% of the tests, you can keep working until it does. Attend office hours for help or post your questions on CampusWire.**

# Academic Honesty Policy Reminder

Copying partial or whole solutions, obtained from other students or elsewhere, is **academic dishonesty**. Do not share your code with your classmates, and do not use your classmates' code. Posting solutions to the project on public sites **is not allowed**. If you are confused about what constitutes academic dishonesty, you should re-read the course policies.