

K-디지털 트레이닝

member 테이블

[KB] IT's Your Life

테이블 생성

-- 사용자 정보 테이블

```
drop table if exists tbl_member;
```

```
create table tbl_member
```

```
(  
    username          varchar(50) primary key,      -- 사용자 id  
    password          varchar(128) not null,         -- 암호화된 비밀번호  
    email             varchar(50) not null,  
    reg_date          datetime default now(),  
    update_date        datetime default now()  
);
```

-- 사용자 권한 테이블

```
drop table if exists tbl_member_auth;
```

```
create table tbl_member_auth
```

```
(  
    username          varchar(50) not null,          -- 사용자 id  
    auth              varchar(50) not null,          -- 권한 문자열 ROLE_ADMIN, ROLE_MANAGER, ROLE_MEMBER 등  
    primary key(username, auth),                    -- 복합키  
    constraint fk_authorities_users foreign key (username) references tbl_member(username)  
);
```

데이터 추가

-- 테스트 사용자 추가

```
insert into tbl_member(username, password, email)
values
```

```
('admin', '$2a$10$EsIMfxbJ6NuvwX7MDj4WqOYFzLU9U/lddCyn0nic5dFo3VfJYrXYC', 'admin@galapgos.org'),
('user0', '$2a$10$EsIMfxbJ6NuvwX7MDj4WqOYFzLU9U/lddCyn0nic5dFo3VfJYrXYC', 'user0@galapgos.org'),
('user1', '$2a$10$EsIMfxbJ6NuvwX7MDj4WqOYFzLU9U/lddCyn0nic5dFo3VfJYrXYC', 'user1@galapgos.org'),
('user2', '$2a$10$EsIMfxbJ6NuvwX7MDj4WqOYFzLU9U/lddCyn0nic5dFo3VfJYrXYC', 'user2@galapgos.org'),
('user3', '$2a$10$EsIMfxbJ6NuvwX7MDj4WqOYFzLU9U/lddCyn0nic5dFo3VfJYrXYC', 'user3@galapgos.org'),
('user4', '$2a$10$EsIMfxbJ6NuvwX7MDj4WqOYFzLU9U/lddCyn0nic5dFo3VfJYrXYC', 'user4@galapgos.org');
```

```
select * from tbl_member;
```

권한 데이터 추가

```
insert into tbl_member_auth(username, auth)
values
```

```
    ('admin','ROLE_ADMIN'),
    ('admin','ROLE_MANAGER'),
    ('admin','ROLE_MEMBER'),
    ('user0','ROLE_MANAGER'),
    ('user0','ROLE_MEMBER'),
    ('user1','ROLE_MEMBER'),
    ('user2','ROLE_MEMBER'),
    ('user3','ROLE_MEMBER'),
    ('user4','ROLE_MEMBER');
```


```
select * from tbl_member_auth order by auth;
```

- ADMIN(최고 관리자)
 - ROLE_ADMIN, ROLE_MANAGER, ROLE_MEMBER
- MANAGER(일반 관리자)
 - ROLE_MANAGER, ROLE_MEMBER
- MEMBER(일반 회원)
 - ROLE_MEMBER

security.account.domain.AuthVO.java

```
@Data
public class AuthVO implements GrantedAuthority {
    private String username;
    private String auth;

    @Override
    public String getAuthority() {
        return auth;
    }
}
```

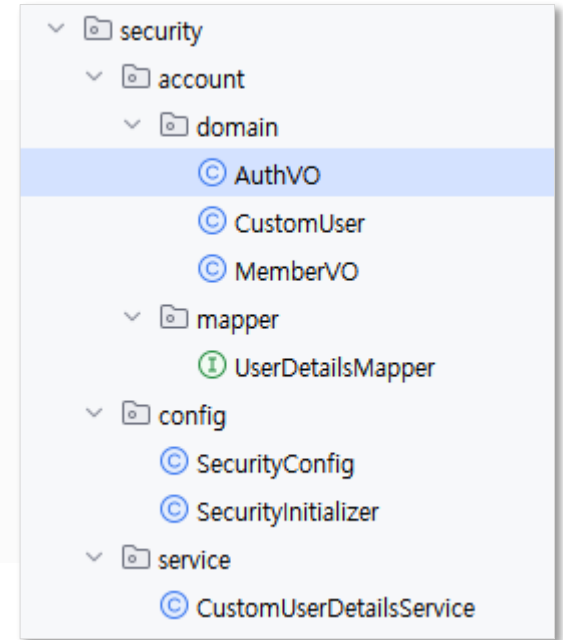

○ GrantedAuthority 인터페이스

■ 권한 정보 추출

```
public interface GrantedAuthority extends Serializable {
    String getAuthority();
}
```

 security.account.domain.MemberVO.java


```
import java.util.Date;
import java.util.List;

@Data
@NoArgsConstructor
@AllArgsConstructor
public class MemberVO {
    private String username;
    private String password;
    private String email;
    private Date regDate;
    private Date updateDate;

    private List<AuthVO> authList;

}
```

// 권한 목록, join 처리 필요

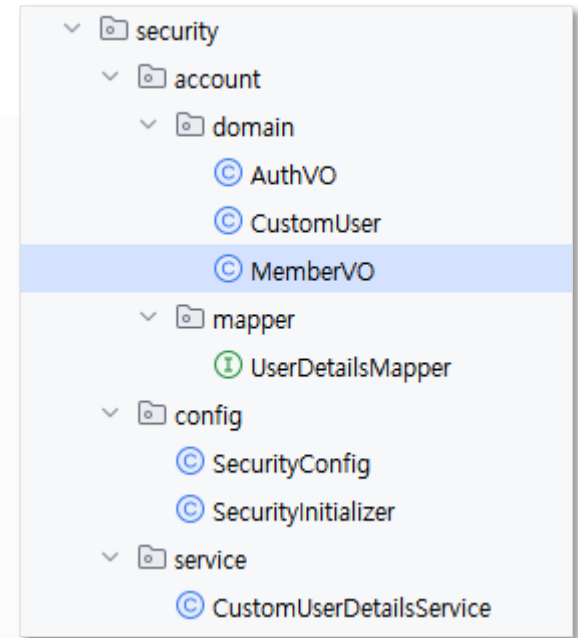


resources::mybatis-config.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE configuration PUBLIC "-//mybatis.org//DTD Config 3.0//EN" "http://mybatis.org/dtd/mybatis-3-config.dtd">

<configuration>
  <settings>
    <setting name="mapUnderscoreToCamelCase" value="true" />
  </settings>


  <typeAliases>
    <package name="org.scoula.security.account.domain" />
  </typeAliases>
</configuration>
```

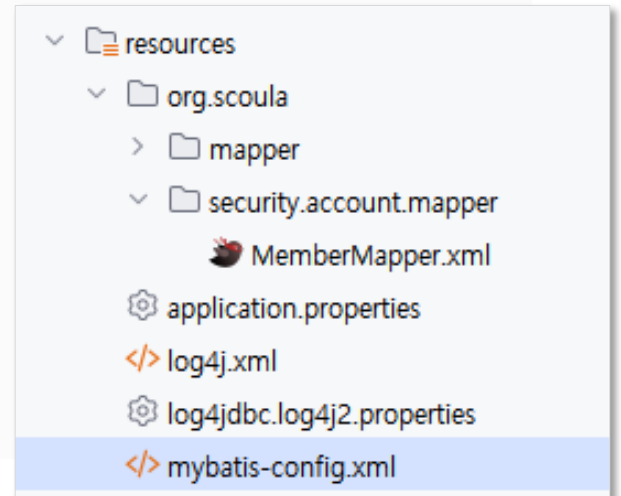

UserDetailsMapper.java

```
public interface UserDetailsMapper {  
    public MemberVO get(String username);  
}
```

- tbl_membe와 tbl_member_auth를 Join처리
 - MemberVO의 authList를 설정
 - MyBatis의 resultMap으로 Join 쿼리 결과를 MemberVO로 맵핑

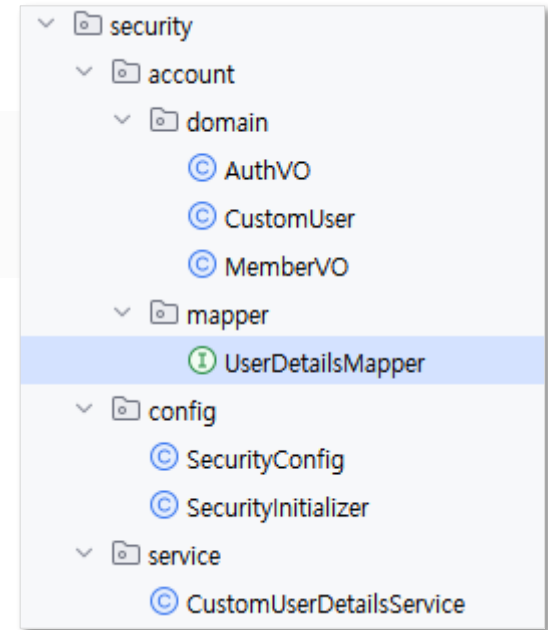

✓ MyBatis의 <resultMap>

```
select m.username, password, email, reg_date, update_date, auth
from tbl_member m
    left outer join tbl_member_auth a
    on m.username = a.username
where m.username = 'admin';
```

List<AuthVO>로 구성

	username	password	email	reg_date	update_date	auth
1	admin	\$2a\$10\$EsIMfxbJ6NuvwX7M	admin@galapgos.org	2023-11-24 17:24:04	2023-11-24 17:24:04	ROLE_ADMIN
2	admin	\$2a\$10\$EsIMfxbJ6NuvwX7M	admin@galapgos.org	2023-11-24 17:24:04	2023-11-24 17:24:04	ROLE_MANAGER
3	admin	\$2a\$10\$EsIMfxbJ6NuvwX7M	admin@galapgos.org	2023-11-24 17:24:04	2023-11-24 17:24:04	ROLE_USER

1개의 MemberVO 인스턴스로 구성

```
@Data
public class MemberVO {
    private String username;
    private String password;
    private String email;
    private Date regDate;
    private Date updateDate;

    private List<AuthVO> authList;
}
```

✓ resultMap

- select 쿼리 결과를 VO객체로 매핑하는 규칙 정의

```
<ResultMap type="VO 객체 클래스명" id="식별자">  
  <id property="VO 속성명" column="컬럼명"/>  
  <result property="VO 속성명" column="컬럼명"/>  
  ...  
</ResultMap>
```

List<AuthVO>로 구성

1개의 MemberVO 인스턴스로 구성

- 1:N의 Join 결과 매핑

```
<ResultMap type="VO 객체 클래스명" id="식별자">  
  <id property="VO 속성명" column="컬럼명"/>  
  <result property="VO 속성명" column="컬럼명"/>  
  ...
```

```
  <collection property="부모객체의 컬렉션 속성명" resultMap="자식 테이블 매핑 resultMap ID">  
</ResultMap>
```

✓ MyBatis의 <resultMap>

```
<resultMap id="memberMap" type="MemberVO">
  <id property="username"      column="username" />
  <result property="password"   column="password" />
  <result property="email"     column="email" />
  <result property="regDate"    column="reg_date" />
  <result property="updateDate" column="update_date" />
```

```
  <collection property="authList" resultMap="authMap" />
</resultMap>
```

```
<resultMap id="authMap" type="AuthVO">
  <result property="username"   column="username" />
  <result property="auth"      column="auth" />
</resultMap>
```

List<AuthVO>로 구성해줌

resources :: UserDetailsMapper.xml


```
<?xml version="1.0" encoding="UTF-8" ?>
<!DOCTYPE mapper PUBLIC "-//mybatis.org//DTD Mapper 3.0//EN" "http://mybatis.org/dtd/mybatis-3-mapper.dtd">

<mapper namespace="org.scoula.security.account.mapper.UserDetailsMapper">

    <resultMap id="authMap" type="AuthVO">
        <result property="username" column="username" />
        <result property="auth" column="auth" />
    </resultMap>

    <resultMap id="memberMap" type="MemberVO">
        <id property="username" column="username" />
        <result property="username" column="username" />
        <result property="password" column="password" />
        <result property="email" column="email" />
        <result property="regDate" column="reg_date" />
        <result property="updateDate" column="update_date" />

        <collection property="authList" resultMap="authMap" />
    </resultMap>
```

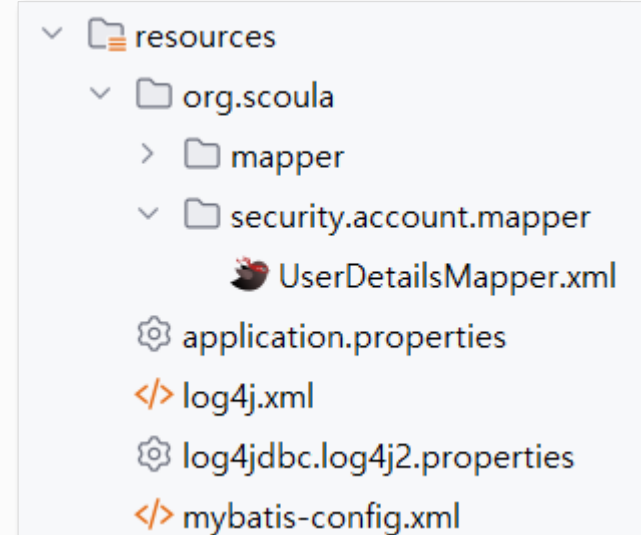

 resources :: UserDetailsMapper.xml

```
<select id="get" resultMap="memberMap">
    select m.username, password, email, reg_date, update_date, auth
    from
        tbl_member m left outer join tbl_member_auth a
                                on m.username = a.username
    where m.username = #{username}
</select>
</mapper>
```

SecurityConfig.java

```
@Configuration
@EnableWebSecurity
@Log4j2
@MapperScan(basePackages = {"org.scoula.security.account.mapper"})
public class SecurityConfig extends WebSecurityConfigurerAdapter {
    ...
}
```

test :: UserDetailsMapperTest.java


```

@ExtendWith(SpringExtension.class)
@ContextConfiguration(classes = { RootConfig.class, SecurityConfig.class })
@Log4j2
public class UserDetailsMapperTest {
    @Autowired
    private UserDetailsMapper mapper;

    @Test
    public void get() {
        MemberVO member = mapper.get("admin");
        log.info(member);

        for(AuthVO auth : member.getAuthList()) {
            log.info(auth);
        }
    }
}

```

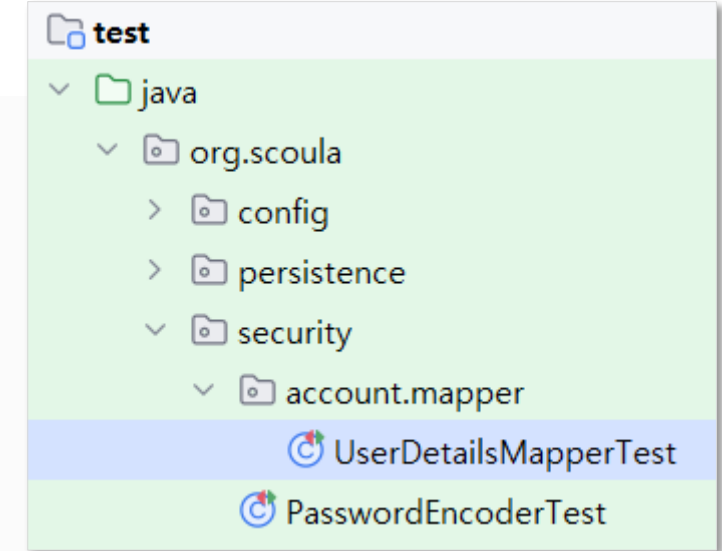

```

INFO jdbc.sqlonly(sqlOccurred:228) - select m.username, password, email, reg_date, update_date, auth from tbl_member m left outer
join tbl_member_auth a on m.username = a.username where m.username = 'admin'

```

```

INFO org.scoula.security.account.mapper.UserDetailsMapperTest(get:24) - MemberVO(username=admin, password=$2a$10$EsIMfxbJ6NuvwX7
MDj4WqOYFzLU9U/IddCyn0nic5dFo3VfJYrXYC, email=admin@galapgos.org, regDate=Fri Jan 17 13:12:21 KST 2025, updateDate=Fri Jan 17 13:12:2
1 KST 2025, authList=[AuthVO(username=admin, auth=ROLE_ADMIN), AuthVO(username=admin, auth=ROLE_MANAGER), AuthVO(username=admin, auth=ROLE_MEMBER)])

```

```

INFO org.scoula.security.account.mapper.UserDetailsMapperTest(get:27) - AuthVO(username=admin, auth=ROLE_ADMIN)
INFO org.scoula.security.account.mapper.UserDetailsMapperTest(get:27) - AuthVO(username=admin, auth=ROLE_MANAGER)
INFO org.scoula.security.account.mapper.UserDetailsMapperTest(get:27) - AuthVO(username=admin, auth=ROLE_MEMBER)

```