KB금융그룹 | 국민의 평생 금융파트너

K-디지털 트레이닝

vue-router를 이용한 라우팅 2

[KB] IT's Your Life

KB국민은행

동적 라우트(Dynamic Route)

- 일정한 패턴의 URI 경로를 하나의 라우트에 연결하는 방법
- URI 경로의 일부에 실행에 필요한 파라미터 값을 포함하여 컴포넌트에서 이용

/경로/:파라미터명

/members/1001
/members/2

[vue-router 객체]

```
const router = createRouter({
    history: createWebHistory(),
    routes : [
        ......
        { path: '/members/:id', component: MemberInfo },
        ......
    ]
})
```

동적 라우트(Dynamic Route)

[vue-router 객체]

```
const router = createRouter({
    history: createWebHistory(),
    routes : [
        ......
        { path: '/members/:id', component: MemberInfo },
        ......
    ]
})
```

[컴포넌트에서]

```
const currentRoute = useRoute()
const id = currentRoute.params.id
```

예) 요청된 경로:
/members/6

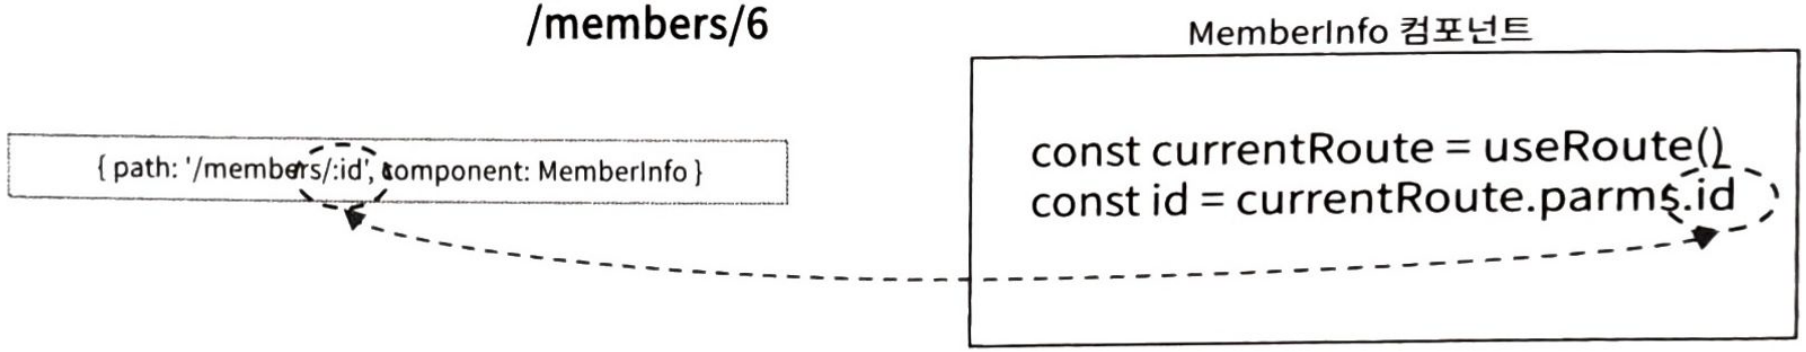

src/pages/MemberInfo.vue

```
<template>
  <div class="card card-body">
    <h2>Member Info</h2>
    <div>
      경로 패턴: /members/:id<br />
      요청 경로: {{ currentRoute.path }}<br />
      id값: {{ currentRoute.params.id }}<br />
    </div>
  </div>
</template>
<script>
import { useRoute } from 'vue-router';

export default {
  name: 'MemberInfo',
  setup() {
    const currentRoute = useRoute();
    return { currentRoute };
  },
};
</script>
```

src/router/index.js

```
import { createRouter, createWebHistory } from 'vue-router';

import Home from '@/pages/Home.vue';
import About from '@/pages/About.vue';
import Members from '@/pages/Members.vue';
import Videos from '@/pages/Videos.vue';
import MemberInfo from '@/pages/MemberInfo.vue';

const router = createRouter({
  history: createWebHistory(),
  routes: [
    { path: '/', component: Home },
    { path: '/about', component: About },
    { path: '/members', component: Members },
    { path: '/members/:id', component: MemberInfo },
    { path: '/videos', component: Videos },
  ],
});

export default router;
```

주소창에 http://localhost:5173/members/1001 직접 입력

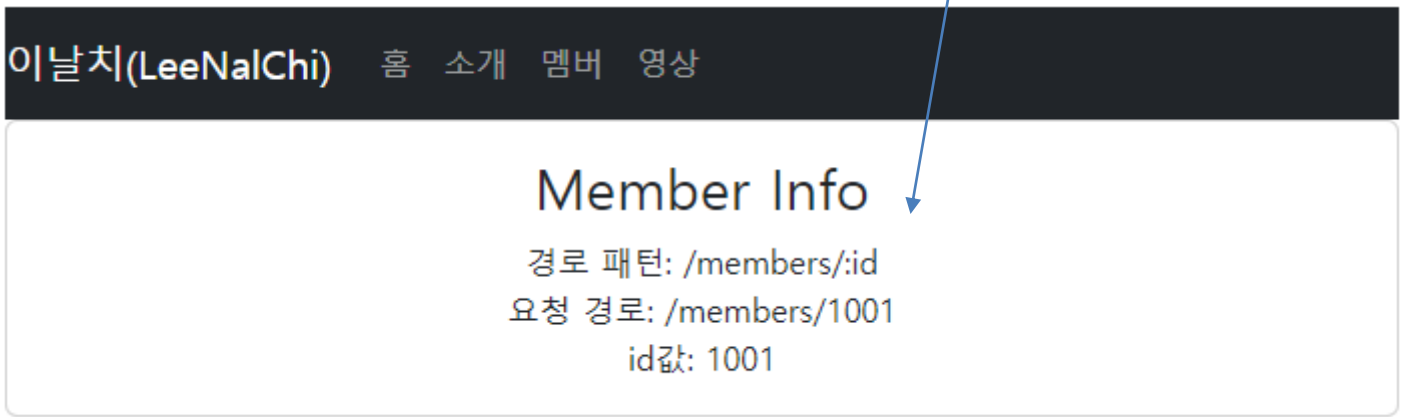

src/members.json

```
[
  {
    "id": 1,
    "name": "장영규",
    "role": "베이스",
    "photo": "http://sstatic.naver.net/people/90/200810291643098681.jpg",
    "desc": "음악감독,베이스연주가,가수",
    "insta": "",
    "facebook": "",
    "youtube": ""
  },
  {
    "id": 2,
    "name": "이철희",
    "role": "드럼",
    "photo": "http://sstatic.naver.net/people/25/202004271203269741.jpg",
    "desc": "드럼연주가",
    "insta": "https://www.instagram.com/chulheedrum/",
    "facebook": "",
    "youtube": "https://www.youtube.com/channel/UCt4_srP6q_aPsmuZ3W3R-Uw"
  },
   …
]
```

src/App.vue

```
…
<style>
@import url('https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css');
…
.fa {
  padding: 5px;
  width: 30px;
  text-align: center;
  text-decoration: none;
  margin: 5px 2px;
}
.fa-facebook {
  background: #3b5998;
  color: white;
}
.fa-youtube {
  background: #bb0000;
  color: white;
}
.fa-instagram {
  background: #125688;
  color: white;
}
</style>
```

src/pages/MemberInfo.vue

```
<template>
  <div className="mt-5">
    <img :src="member.photo" class="img" />
    <h4 class="mt-2">{{ member.name }}({{ member.role }})</h4>
    <p>{{ member.desc }}</p>
    <a
      v-if="member.insta && member.insta !== ''"
      class="fa fa-instagram m-1"
      :href="member.insta"
    ></a>
    <a
      v-if="member.facebook && member.facebook !== ''"
      class="fa fa-facebook m-1"
      :href="member.facebook"
    ></a>
    <a
      v-if="member.youtube && member.youtube !== ''"
      class="fa fa-youtube m-1"
      :href="member.youtube"
    ></a>
    <br /><br />
    <router-link to="/members">멤버 목록으로</router-link>
  </div>
</template>
```

이철희(드럼)

드럼연주가

멤버 목록으로

src/pages/MemberInfo.vue

```
<script>
import { useRoute } from 'vue-router'
import members from '@/members.json'

export default {
    name : "MemberInfo",
    setup() {
        const currentRoute = useRoute()
        const id = parseInt(currentRoute.params.id, 10);
        const member = members.find((m)=>m.id === id)

        return { member }
    }
}
</script>
```

src/pages/Members.vue

```vue
<template>
  <div>
    <h2 class="m-4">이날치 멤버</h2>
    <div class="container">
      <div class="row">
        <div
          v-for="m in members"
          :key="m.id"
          class="col-6 col-xs-6 col-sm-4 col-md-3 col-lg-2"
        >
          <router-link :to="'/members/' + m.id">
            <img
              class="img-thumbnail"
              style="width: 90px; height: 110px"
              :src="m.photo"
              :title="m.name"
            /><br />
            <h6 class="display-7">{{ m.name }}</h6>
          </router-link>
        </div>
      </div>
    </div>
  </div>
</template>
```

```vue
<script>
import members from '@/members.json';

export default {
  name: 'Members',
  setup() {
    return { members };
  },
};
</script>
```

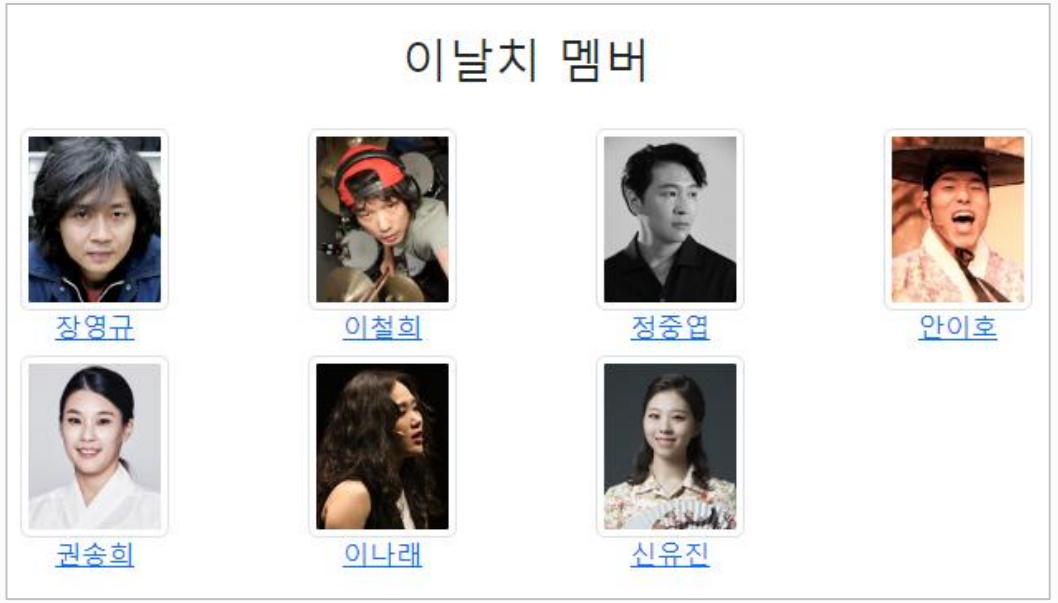

중첩 라우트

- /members/1로 요청했을 때 화면을 완전히 전환
- 화면 전환없이 화면을 중첩시켜서 보아야 하는 경우 → 중첩 라우트(Nested Route)
- 팝업 화면 구성 시 주로 사용

/videos

/videos/:id

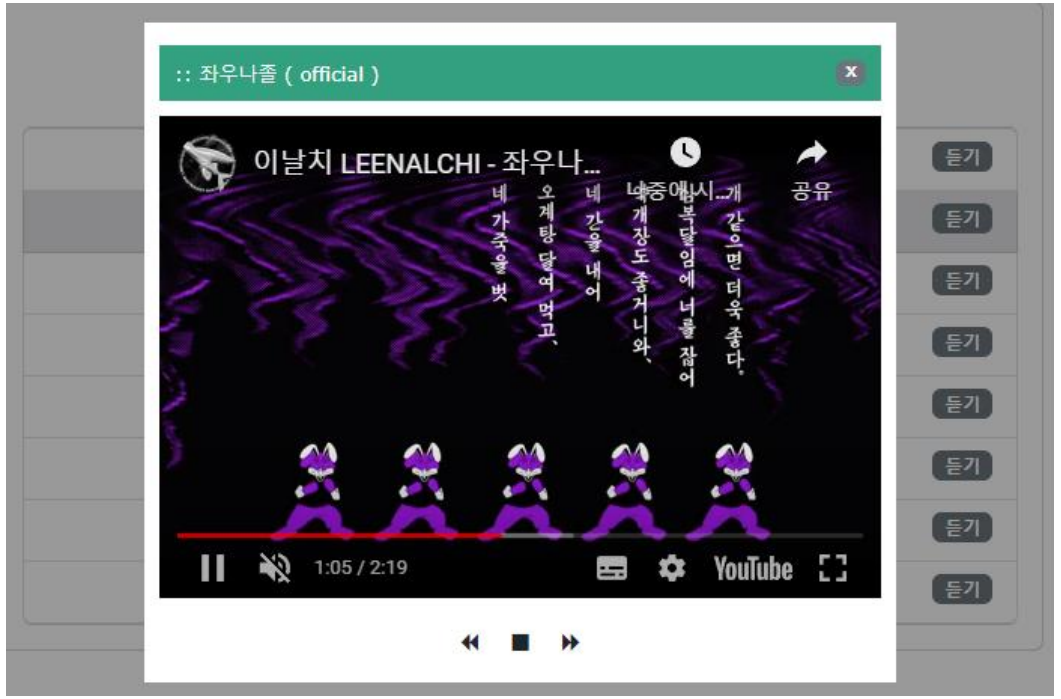

중첩 라우트

요청 경로 : /videos

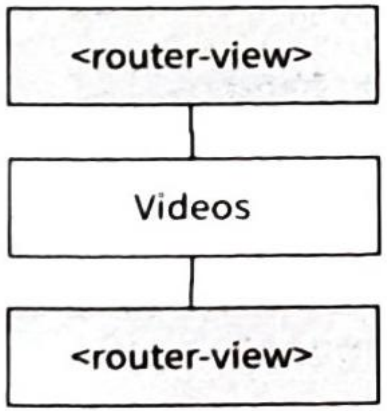

요청 경로 : /videos/:id

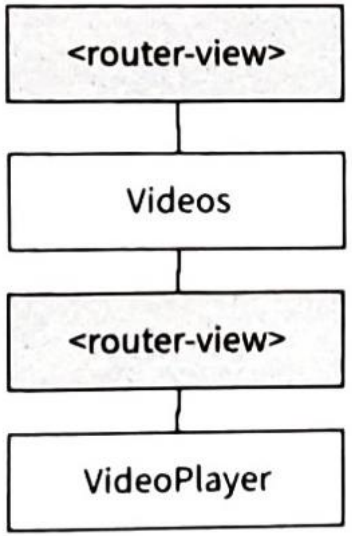

router 객체

```
const router = createRouter({
  routes : [
    ......
    {
      path: '/videos', component: Videos,
      children : [
        { path: ':id', component: VideoPlayer },
      ]
    },
  ]
})
```

명명된 라우트(Named Route)

- 라우트 정보에 이름을 부여하는 방법
- URI 경로가 아닌 이름을 이용해 경로를 전환

라이브러리 추가

- youtube-vue3
  - 유튜브 영상 재생 라이브러리
  - npm install youtube-vue3

비디오 재생 목록

- src/videos.json
- App에서 해당 데이터를 provide
- Videos.vue에서 inject 해서 비디오 목록 사용

src/App.vue

```
<template>
  <div class="container">
    <Header />
    <router-view></router-view>
  </div>
</template>

<script>
import Header from '@/components/Header.vue'
import { provide } from 'vue';

export default {
  name : "App",
  components : { Header },
  setup() {
    provide('videos', [
      { "id":"t0BHhqw_Ecc", "title":"범 내려온다", "category":"official" },
      { "id":"FrCkLMxnlMI", "title":"좌우나졸", "category":"official" },
      { "id":"7O0hIrgMcCg", "title":"별주부가 울며 여짜오되", "category":"official" },
      { "id":"MJD_fAdqNQc", "title":"어류도감", "category":"official" },
      { "id":"SmTRaSg2fTQ", "title":"범 내려온다", "category":"온스테이지2.0" },
      { "id":"B_X7n0AaLqA", "title":"범 내려온다(서울)", "category":"관광공사" },
      { "id":"sV1jq6RFSXc", "title":"어류도감(부산)", "category":"관광공사" },
      { "id":"dInPs_VHqSM", "title":"좌우나졸(전주)", "category":"관광공사" }
    ])
  }
}
</script>
```

src/App.vue

```
<style>
@import url("https://cdnjs.cloudflare.com/ajax/libs/font-awesome/4.7.0/css/font-awesome.min.css");
.container { text-align: center; margin-top:10px; }
.fa { padding: 5px; width: 30px; text-align: center;
    text-decoration: none; margin: 5px 2px; }
.fa-facebook { background: #3B5998; color: white; }
.fa-youtube { background: #bb0000; color: white; }
.fa-instagram { background: #125688; color: white; }
</style>
```

src/router/index.js

```
…

const router = createRouter({
    history: createWebHistory(),
    routes : [
        { path: '/', name:'home', component: Home },
        { path: '/about', name:'about', component: About },
        { path: '/members', name:'members', component: Members },
        { path: '/members/:id', name:'members/id', component: MemberInfo },
        {
            path: '/songs', name:'videos', component: Videos,
            children : [
                { path: ':id', name:'videos/id', component: VideoPlayer }
            ]
        },
    ]
})

export default router;
```

src/components/Header.vue

```
<template>
…
    <div :class="navClass">
      <ul class="navbar-nav">
        <li class="nav-item">
          <router-link class="nav-link" :to="{ name: 'home' }">홈</router-link>
        </li>
        <li class="nav-item">
          <router-link class="nav-link" :to="{ name: 'about' }">소개</router-link>
        </li>
        <li class="nav-item">
          <router-link class="nav-link" :to="{ name: 'members' }">멤버</router-link>
        </li>
        <li class="nav-item">
          <router-link class="nav-link" :to="{ name: 'videos' }">영상</router-link>
        </li>
      </ul>
    </div>
  </nav>
</template>
…
```

query.params

URI 패턴	<router-link>의 예
/members/:id	<router-link :to="{ name:'members/id', params: { id: 1 } }"> ..... </router-link> ex) /members/1
/members?a=1&b=2	<router-link :to="{ name:'members', query: { a: 1, b: 2 } }"> ..... </router-link>

src/pages/Members.vue

```
<template>
  <div>
    <h2 class="m-4">이날치 멤버</h2>
    <div class="container">
      <div class="row">
        <div v-for="m in members" :key="m.id"
          class="col-6 col-xs-6 col-sm-4 col-md-3 col-lg-2">
          <router-link :to="{ name:'members/id', params: { id: m.id } }">
            <img class="img-thumbnail"
              style="width:90px; height:110px;"
              :src="m.photo"
              :title="m.name" /><br/>
            <h6 class="display-7">{{m.name}}</h6>
          </router-link>
        </div>
      </div>
    </div>
  </div>
</template>
…
```

src/pages/MemberInfo.vue

```
<template>
    <div className="mt-5">

      …

      <router-link :to="{ name:'members' }">멤버 목록으로</router-link>
    </div>
</template>
```

src/pages/Videos.vue

```
<template>
  <div class="card card-body">
    <h2 class="m-3">영상 리스트</h2>
    <ul class="list-group">
      <li
        v-for="v in videos"
        :key="v.id"
        class="list-group-item text-left"
        :class="playingVideo(v.id)"
      >
        {{ v.title }} ( {{ v.category }} )
        <router-link :to="{ name: 'videos/id', params: { id: v.id } }">
          <span class="float-end badge bg-secondary">듣기</span>
        </router-link>
      </li>
    </ul>
    <router-view></router-view>
  </div>
</template>
```

src/pages/Videos.vue

```
<script>
import { inject } from 'vue'
import { useRoute } from 'vue-router'

export default {
  name : "Videos",
  setup() {
    const videos = inject('videos')
    const currentRoute = useRoute();
    const playingVideo = (id) => {
      return id === currentRoute.params.id ? "list-group-item-secondary" : "";
    }
    return { playingVideo, videos }
  }

}
</script>
```

src/pages/VideoPlayer.vue

```
<template>
    <div class="modal">
        <div class="box">
            <div class="heading">
                <span class="title">:: {{videoInfo.video.title}}</span>
                <span class="category"> ( {{videoInfo.video.category}} ) </span>
                <span class="float-end badge bg-secondary pointer" @click="stopVideo">
                    X
                </span>
            </div>
            <div class="player">
                <YoutubeVue3 ref="playerRef" :videoid="videoInfo.video.id"
                    :autoplay="1" :controls="1" @ended="playNext" />
            </div>
            <div>
                <div>
                    <i class="fa fa-backward ml-2 pointer" @click="playPrev"></i>
                    <i class="fa fa-stop ml-2 pointer" @click="stopVideo"></i>
                    <i class="fa fa-forward ml-2 pointer" @click="playNext"></i>
                </div>
            </div>
        </div>
    </div>
</template>
```

src/pages/VideoPlayer.vue

```
<script>
import { reactive, ref, inject } from 'vue'
import { useRoute, useRouter, onBeforeRouteUpdate } from 'vue-router'
import { YoutubeVue3} from 'youtube-vue3'

export default {
    name : "VideoPlayer",
    components : { YoutubeVue3 },
    setup() {
        const videos = inject('videos');
        const playerRef = ref(null)
        const currentRoute = useRoute()
        const router = useRouter();

        let videoInfo, currentIndex, prevVideoId, nextVideoId;
        videoInfo=reactive({ video: videos.find((v)=>v.id === currentRoute.params.id) })

        const getNavId = (to) => {
            videoInfo.video = videos.find((v)=>v.id === to.params.id);
            currentIndex = videos.findIndex((v)=>v.id === videoInfo.video.id)
            prevVideoId = videos[currentIndex-1] ? videos[currentIndex-1].id : null;
            nextVideoId = videos[currentIndex+1] ? videos[currentIndex+1].id : null;
        }
```

src/pages/VideoPlayer.vue

```
        //마운트되었을 때 현재의 라우트 정보를 이용해 이전, 다음 ID 획득
        getNavId(currentRoute)
        const stopVideo = () => {
            playerRef.value.player.stopVideo()
            router.push({ name:'videos' });
        }
        const playNext = () => {
            if (nextVideoId)
                router.push({ name:'videos/id', params: { id: nextVideoId } })
            else
                router.push({ name:'videos/id', params: { id: videos[0].id } })
        }
        const playPrev = () => {
            if (prevVideoId)
                router.push({ name:'videos/id', params: { id: prevVideoId } })
        }

        onBeforeRouteUpdate((to) => {
            getNavId(to)
        })

        return { videoInfo, playerRef, playNext, stopVideo,  playPrev };
    }
}
</script>
```

src/pages/VideoPlayer.vue

```
<style scoped>
.modal { display: block; position: fixed; z-index: 1;
    left: 0; top: 0; width: 100%; height: 100%;
    overflow: auto;
    background-color: rgba(0,0,0,0.4); }
.box { background-color: white; margin:80px auto;
    max-width: 500px; min-width: 100px; min-height: 350px;
    font: 13px "verdana";
    padding: 10px 10px 10px 10px;  }
.box div { padding: 0;  display: block;  margin: 10px 0 0 0; }
.box .heading { background: #33A17F; font-weight: 300;
    text-align: left; color: #fff;
    margin:5px 0 5px 0; padding: 10px; min-width:200px;
    max-width:500px; }
.box .player { background:white; }
.pointer { cursor:pointer; }
</style>
```

src/router/index.js

```
…

const router = createRouter({
  history: createWebHistory(),
  routes: [
    { path: '/', name: 'home', component: Home },
    { path: '/about', name: 'about', component: About },
    { path: '/members', name: 'members', component: Members },
    { path: '/members/:id', name: 'members/id', component: MemberInfo },
    {
      path: '/songs',
      name: 'videos',
      component: Videos,
      children: [{ path: ':id', name: 'videos/id', component: VideoPlayer }],
    },
  ],
});

export default router;
```

명명된 뷰(Named View)

- <router-view>를 중첩시키지 않고 한꺼번에 화면에 나타내야 하는 경우
- <router-view>에 이름을 부여, 여러 컴포넌트를 지정된 이름의 뷰로 나타냄

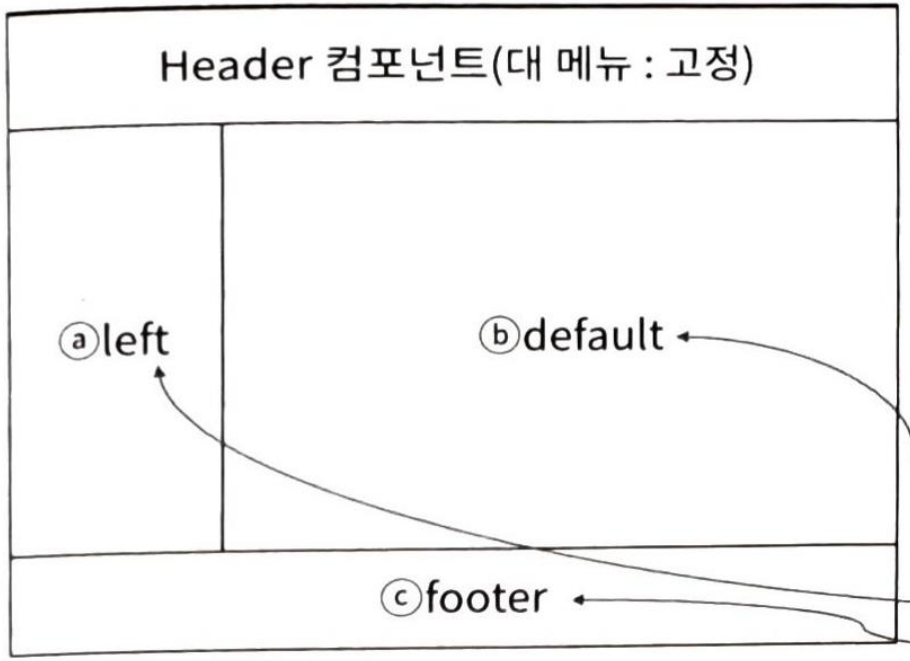


```
const router = createRouter({
  history: createWebHistory(),
  routes : [
    ......
    {
      path: '/', components : {
        left : HomeLeft,
        default : Home,
      }
    },
    {
      path: '/members', components: {
        default : Members,
        left : MembersLeft,
        footer : MembersFooter,
      }
    },
    ......
  ]
})
```

```
ⓐ:<router-view name="left"></router-view>
......
ⓑ:<router-view></router-view>
......
ⓒ:<router-view name="footer"></router-view>
```

명명된 뷰(Named View)

- 이름이 지정되지 않은 뷰 → 기본 뷰(default view)

src/router/index.js

```
…
const router = createRouter({
    history: createWebHistory(),
    routes : [
        {
            path: '/',
            components: {
                default:Home,
                left:HomeLeft,
            }
        },
        {
            path: '/members',
            components: {
                default: Members,
                left: MembersLeft,
                footer: MembersFooter,
            }
        },
    ]
})

export default router;
```

src/App.vue

```
<template>
  <div class="container">
    <Header />
    <div class="card card-body border-0 pl-3 pr-3 pt-0">
      <div class="row">
        <div class="col-md-3 border">
          <router-view name="left"></router-view>
        </div>
        <div class="col-md-9 border">
          <router-view></router-view>  <!-- default -->
        </div>
      </div>
      <div class="row">
        <div class="col-md-12 border">
          <router-view name="footer"></router-view>
        </div>
      </div>
    </div>
  </div>
</template>
```