




```
1 expense(canteen, 50, food).
2 expense(bus, 20, travel).
3 expense(netflix, 499, subscription).
4 expense(stationary, 100, study).
5 expense(pizza, 300, food).
6
7 list_category(Cat) :-
8     expense(Item, Cost, Cat),
9     format('~w: ~w~n', [Item, Cost]).
10
11 is_expensive(Item) :-
12     expense(Item, Cost, _),
13     Cost > 200.
14
15 budget_check(Item, 'Alert: High Spend') :-
16     is_expensive(Item).
17
18 budget_check(Item, 'OK') :-
19     expense(Item, Cost, _),
20     Cost =< 200.
```

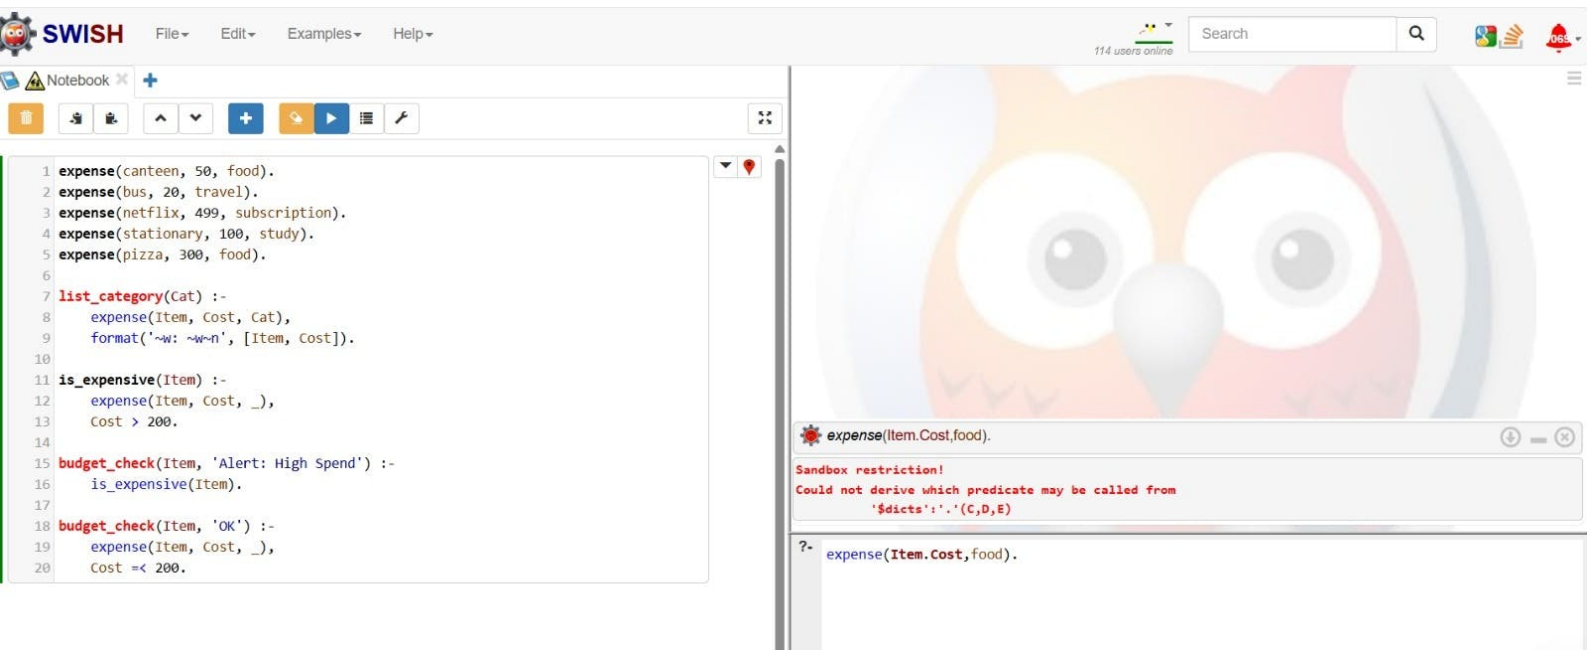

expense(Item, Cost, food).

Item	Cost	
canteen	50	1
pizza	300	2

?- expense(**Item**,**Cost**, food).

Examples History Solutions ☒ table results [Run!](#)



File Edit Examples Help

Notebook

Save

Undo

Redo

Run

Stop

Fullscreen

```
1 expense(canteen, 50, food).
2 expense(bus, 20, travel).
3 expense(netflix, 499, subscription).
4 expense(stationary, 100, study).
5 expense(pizza, 300, food).
6
7 list_category(Cat) :-
8     expense(Item, Cost, Cat),
9     format('~w: ~w~n', [Item, Cost]).
10
11 is_expensive(Item) :-
12     expense(Item, Cost, _),
13     Cost > 200.
14
15 budget_check(Item, 'Alert: High Spend') :-
16     is_expensive(Item).
17
18 budget_check(Item, 'OK') :-
19     expense(Item, Cost, _),
20     Cost <= 200.
```

121 users online

Search



expense(Item, Cost, food).

Item	Cost	
canteen	50	1
pizza	300	2

list_category(study).

stationary: 100

true

Next 10 100 1,000 Stop

?- list_category(study).

Examples History Solutions

table results Run!

 **SWISH** File Edit Examples Help

Notebook

1 `expense(canteen, 50, food).`

2 `expense(bus, 20, travel).`

3 `expense(netflix, 499, subscription).`

4 `expense(stationary, 100, study).`

5 `expense(pizza, 300, food).`

6

7 `list_category(Cat) :-`

8 `expense(Item, Cost, Cat),`

9 `format('~w: ~w~n', [Item, Cost]).`

10

11 `is_expensive(Item) :-`

12 `expense(Item, Cost, _),`

13 `Cost > 200.`

14

15 `budget_check(Item, 'Alert: High Spend') :-`


16 `is_expensive(Item).`

17

18 `budget_check(Item, 'OK') :-`

19 `expense(Item, Cost, _),`

20 `Cost <= 200.`

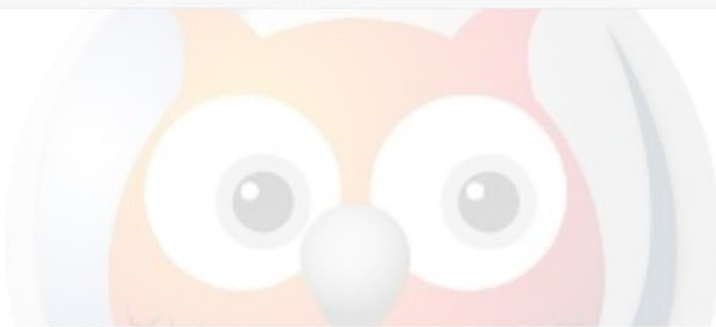

 `expense(Item,Cost,food).`

 `list_category(study).`

 `is_expensive(netflix).`

true

?- `is_expensive(netflix).`

Examples

History

Solutions

☒ table results



 **SWISH**

File

Edit

Examples

Help

Notebook






```
1 expense(canteen, 50, food).
2 expense(bus, 20, travel).
3 expense(netflix, 499, subscription).
4 expense(stationary, 100, study).
5 expense(pizza, 300, food).
6
7 list_category(Cat) :-
8     expense(Item, Cost, Cat),
9     format('~w: ~w~n', [Item, Cost]).
10
11 is_expensive(Item) :-
12     expense(Item, Cost, _),
13     Cost > 200.
14
15 budget_check(Item, 'Alert: High Spend') :-
16     is_expensive(Item).
17
18 budget_check(Item, 'OK') :-
19     expense(Item, Cost, _),
20     Cost =< 200.
```

120 users online

Search



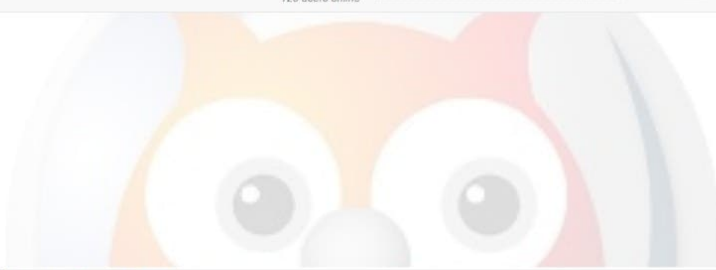

 expense(Item,Cost,food).

 list_category(study).

 is_expensive(netflix).

 budget_check(bus, Status).

Status	
'OK'	1

?- budget_check(bus, Status).

Examples

History

Solutions

☒ table results

Run!

 **SWISH**

File

Edit

Examples

Help

120 users online

Search




Notebook





```
1 expense(canteen, 50, food).
2 expense(bus, 20, travel).
3 expense(netflix, 499, subscription).
4 expense(stationary, 100, study).
5 expense(pizza, 300, food).
6
7 list_category(Cat) :-
8     expense(Item, Cost, Cat),
9     format('~w: ~w~n', [Item, Cost]).
10
11 is_expensive(Item) :-
12     expense(Item, Cost, _),
13     Cost > 200.
14
15 budget_check(Item, 'Alert: High Spend') :-
16     is_expensive(Item).
17
18 budget_check(Item, 'OK') :-
19     expense(Item, Cost, _),
20     Cost =< 200.
```

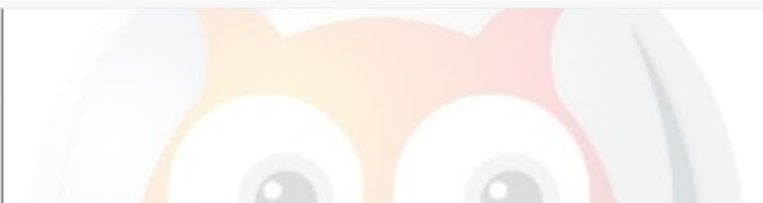

 expense(Item, Cost, food).

 list_category(study).

 is_expensive(netflix).

 budget_check(bus, Status).

 expense(Name, Cost, _), Cost > 200.

Name	Cost	
netflix	499	1
pizza	300	2

? expense(Name, Cost, _), Cost > 200.

Examples

History

Solutions

☒ table results 