Department of Information Technology

Academic Year: 2025-26
Semester: VI
Class / Branch / Div: TE- IT C
Subject: MAD & PWA Lab
Name of Instructor: Saylee Lapalikar

Name of Student: Shravani Sawant
Student ID:24204018
Roll No.19
Date of Submission:20/02/26

Experiment No.:5

Aim: To apply navigation and routing in Flutter App.

Prerequisites: Android studio, flutter SDK.

Problem Statement: To develop a flutter app with two screens, screen-1 should navigate to screen-2.

Software: Android studio, flutter SDK.

Code:

```
import 'package:flutter/material.dart';

void main() {
  runApp(MaterialApp(
    home: HomeRoute(),
  ));
}

class HomeRoute extends StatelessWidget {
  @override
  Widget build(BuildContext context) {
    return Scaffold(
      appBar: AppBar(
        title: Text('Travel World'),
        backgroundColor: Color(0xff64cbb9),
        centerTitle: true,
      ),
      body: Center(
        child: Column(
          mainAxisAlignment: MainAxisAlignment.center,
          children: [
            Image.asset("assets/home.jpeg",
                width: 200, height: 200), // Display one image
            SizedBox(height: 20),
            Text(
              "Welcome To Travel World !",
              style: TextStyle(fontSize: 24, fontWeight: FontWeight.bold),
            ),
```

```
          SizedBox(height: 10),
          Text(
            "Travel Website is an innovative web-based application designed to revolutionize
the field of travel planning. The uniqueness of the project lies in the fact that the
application provides customers with the most relevant information on fares, a vast array
of reviews for each unit, and the ability to book without any additional difficulty and
hassle.",
            textAlign: TextAlign.center,
            style: TextStyle(fontSize: 12),
          ),
          SizedBox(height: 30),
          // Button to go to the second route
          ElevatedButton(
            onPressed: () {
              Navigator.push(
                context,
                MaterialPageRoute(builder: (context) => SecondRoute()),
              );
            },
            child: Text('See Destinations'),
          ),
        ],
      ),
    ),
  );
 }
}

class ProductBox extends StatelessWidget {
  final String name;
  final String description;
  final int price;
  final String images;

  ProductBox(
      {required this.name,
       required this.description,
       required this.price,
       required this.images});

  @override
  Widget build(BuildContext context) {
    return Card(
      margin: EdgeInsets.symmetric(vertical: 8.0),
      child: ListTile(
        contentPadding: EdgeInsets.all(10.0),
        leading: Image.asset(images, width: 60.0, height: 60.0),
        title: Text(name, style: TextStyle(fontWeight: FontWeight.bold)),
        subtitle: Column(
          crossAxisAlignment: CrossAxisAlignment.start,
```

```
        children: [
          Text(description),
          Text('Price: ₹$price', style: TextStyle(color: Colors.green)),
        ],
      ),
    ),
  );
 }
}

class SecondRoute extends StatelessWidget {
 @override
 Widget build(BuildContext context) {
  return Scaffold(
    appBar: AppBar(
      title: Text("Home"),
      backgroundColor: Colors.green,
    ),
    body: ListView(
      padding: EdgeInsets.fromLTRB(3.0, 12.0, 3.0, 12.0),
      children: <Widget>[
        ProductBox(
          name: "Singapore",
          description:
          "Singapore is an island country and city-state in Southeast Asia.",
          price: 50000,
          images: "assets/singa.jpeg"),
        ProductBox(
          name: "London",
          description:
          "London is the capital and largest city of both England and the United Kingdom",
          price: 85000,
          images: "assets/lon.jpeg"),
        ProductBox(
          name: "Australia",
          description:
          "Australia is a federal parliamentary democracy and constitutional monarchy
comprising six states and ten territories",
          price: 2000,
          images: "assets/aus.png"),
      ],
    ),
  );
 }
}

class ThirdRoute extends StatelessWidget {
 final String name;
 final String description;
 final int price;
```

```
final String image;

ThirdRoute({
  required this.name,
  required this.description,
  required this.price,
  required this.image,
});

@override
Widget build(BuildContext context) {
  return Scaffold(
    appBar: AppBar(
      title: Text(name),
      backgroundColor: Colors.teal,
    ),
    body: SingleChildScrollView(
      child: Padding(
        padding: EdgeInsets.all(20),
        child: Column(
          crossAxisAlignment:
          CrossAxisAlignment.center,
          children: [
            Image.asset(image, height: 250),
            SizedBox(height: 20),
            Text(
              name,
              style: TextStyle(
                fontSize: 26,
                fontWeight: FontWeight.bold,
              ),
            ),
            SizedBox(height: 15),
            Text(
              description,
              textAlign: TextAlign.center,
              style: TextStyle(fontSize: 16),
            ),
            SizedBox(height: 20),
            Text(
              "Price: ₹$price",
              style: TextStyle(
                fontSize: 22,
                color: Colors.green,
                fontWeight: FontWeight.bold,
              ),
            ),
            SizedBox(height: 30),
            ElevatedButton(
              style: ElevatedButton.styleFrom(
```

```
                backgroundColor: Colors.teal,
                padding: EdgeInsets.symmetric(
                    horizontal: 40, vertical: 15),
              ),
              onPressed: () {
                ScaffoldMessenger.of(context)
                    .showSnackBar(
                  SnackBar(
                    content: Text(
                        "Booking Confirmed for $name!"),
                  ),
                );
              },
              child: Text(
                "Book Now",
                style: TextStyle(fontSize: 18),
              ),
            ),
          ],
        ),
      ),
    ),
  );
}
}
```

Output:

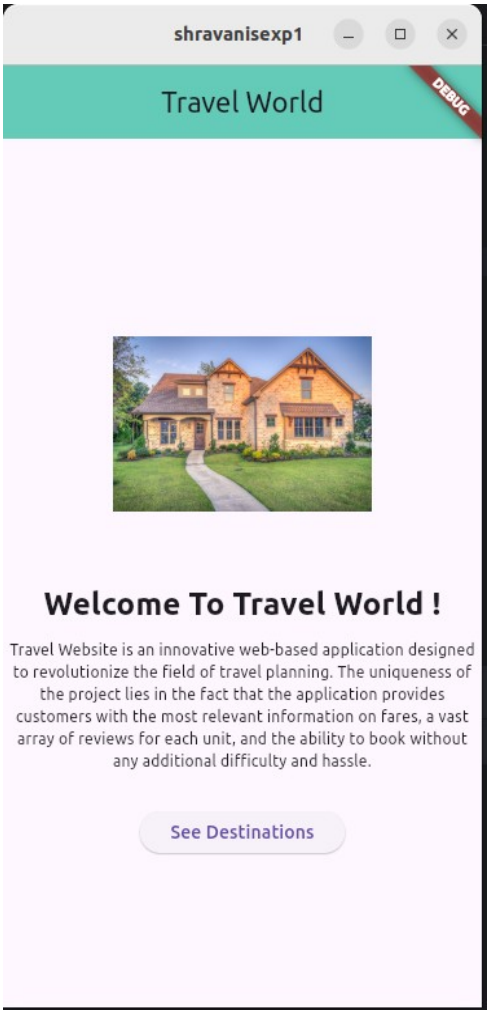

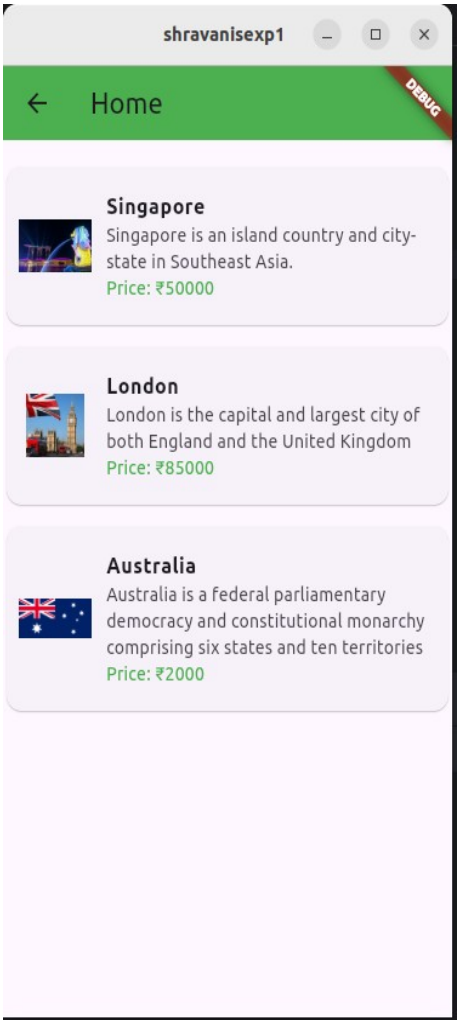

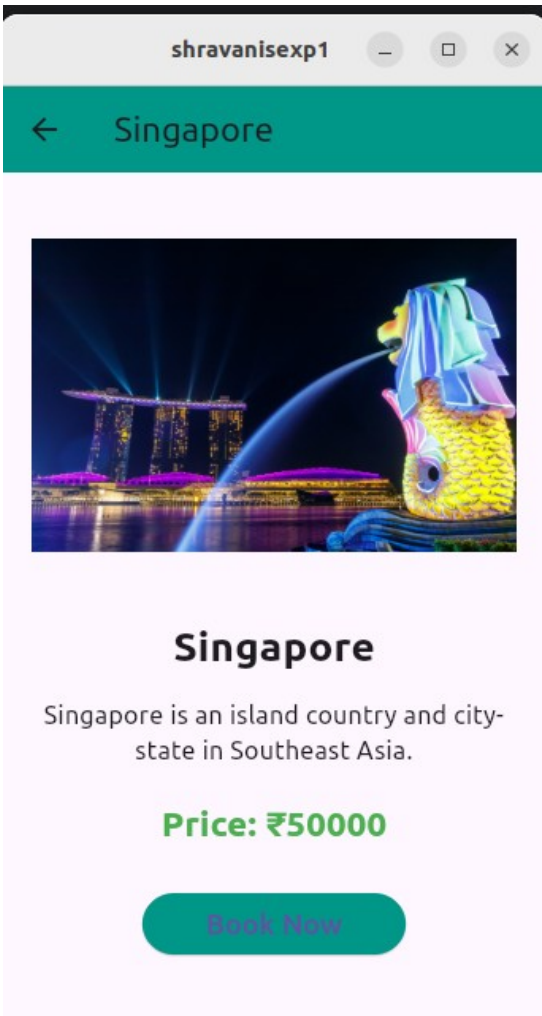

Conclusion: In this experiment we have learn use of navigation and routing in Flutter App .