
Studio publishing providers

Verified against official provider documentation on 5 October 2026. These adapters have local contract tests with injected HTTP. No live social account was connected or posted to during development.

Supported routes

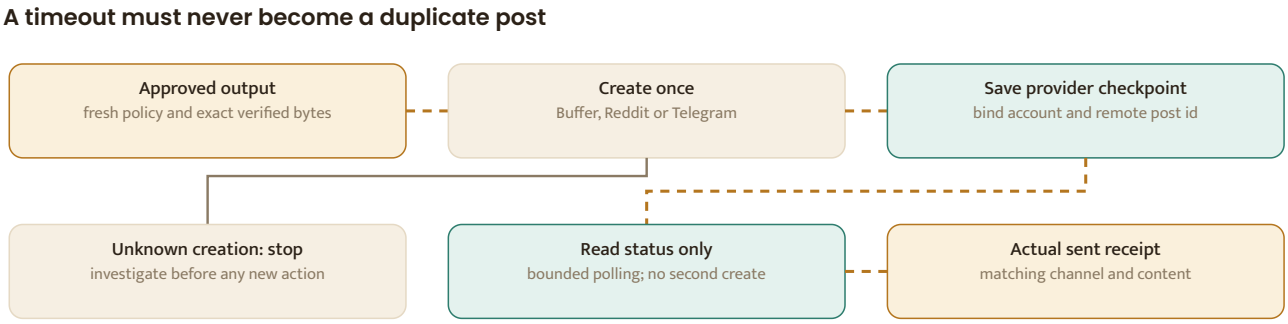

Configured readiness is a prerequisite, not proof of publication. Known checkpoints allow status reads; an unknown creation outcome is held for investigation.

Channel	Transport	Appropriate Ashrama content	Account prerequisite
YouTube	Buffer	Branded Shorts	Connected channel; explicit privacy, audience, AI disclosure and category settings
Facebook	Buffer	Reels, image cards, reflections and blog links	Connected Page with automatic publishing rights
Instagram	Buffer	Reels and image cards	Eligible professional account connected for automatic publishing
X	Buffer	Concise reflections, cards, clips and blog links	Connected account and available publishing entitlement
TikTok	Buffer	Branded vertical clips	Connected account explicitly verified for automatic publishing; disclosure settings reviewed

Channel	Transport	Appropriate Ashrama content	Account prerequisite
Threads	Buffer	Reflections, discussion prompts, cards and clips	Connected account
LinkedIn	Buffer	Seva, community initiatives, events and relevant blog links	Connected organization Page or approved account with publishing rights
Pinterest	Buffer	Evergreen teaching cards and blog discovery	Connected account and explicitly selected board
Bluesky	Buffer	Brief reflections and blog links	Connected account
Telegram	Direct Bot API	Channel announcements, image cards and clips	Bot authorized to publish in the configured channel
Reddit	Direct OAuth API	Contextual discussion or blog-link posts	Approved API access, `submit` / `read` scopes, descriptive user agent and approved subreddit
Ashrama website	Internal Studio workflow	Full blogs	Managed separately from these external adapters

Buffer documents an API key for the account owner's connected channels, with media supplied through reachable URLs. Its API supports automatic immediate publication and later post lookup. Here, a successful creation response is only a checkpoint: publication is confirmed from the automatic post's `sent` status, timestamp and destination URL. A reminder or draft never counts as posted. Buffer quick start, supported channels, publishing schema, video assets.

TikTok's direct integration rules exclude utilities intended solely for accounts operated by the developer's own team, and require creator-facing consent and publishing controls. Studio therefore uses the documented Buffer route rather than claiming that an internal Direct Post app qualifies. Missing automatic eligibility blocks the channel. There is no download-and-post fallback. TikTok content sharing guidelines.

Reddit submission can return application errors inside an HTTP-success response. Studio checks those errors and then retrieves the returned post to verify its subreddit and approved content. Approval of the destination and its community rules remains necessary; the adapter never chooses a subreddit. Reddit submission API, API access guidance.

Telegram's Bot API returns the sent message. Studio verifies the channel, message ID, text/caption and media type. It does not use updates or repeat a send to infer whether an uncertain request succeeded. Telegram Bot API.

Private configuration

`STUDIO_CHANNEL_CONFIG_FILE` is an absolute path to a regular file owned by the worker user, mode `0600`. Symlinks and files over 64 KiB are refused. Configuration is loaded afresh by the caller; secrets must stay outside source control and browser responses. An absent path produces disconnected readiness, without a network call. Invalid configuration throws only `STUDIO_PROVIDER_CONFIG_INVALID`.

Example shape, with illustrative placeholders only:

```
{
 "version": 1,
 "trustedMediaOrigins": ["https://media.ashrama.example"],
 "accounts": [{
   "id": "ashrama-threads",
   "platform": "threads",
   "transport": "buffer",
   "providerAccountId": "BUFFER_CHANNEL_ID",
   "world": "PRODUCTION",
   "enabled": false,
   "eligibilityVerified": false,
   "accessToken": "CONFIGURE_PRIVATELY"
 }]
}
```

One account per channel is accepted. Account IDs are local bindings; `providerAccountId` is a Buffer channel ID, Reddit subreddit name without `r/`, or Telegram `@channel_name`/numeric channel ID. Required defaults:

```
{
 "youtube": { "privacy": "public", "madeForKids": false, "isAiGenerated": false, "categoryId": "27" },
 "tiktok": { "automaticPostingVerified": false, "isAiGenerated": false },
 "pinterest": { "boardServiceId": "APPROVED_BOARD_ID" },
 "reddit": { "userAgent": "server:sgs-distribution-hub:v1 (by /u/ACCOUNT_OWNER)" }
}
```

These defaults live in each relevant account's `defaults` object. The operator must select truthful values before enabling an account. AI assistance with captions is distinct from synthetic or altered audiovisual media disclosure. Token refresh, Buffer account setup and provider eligibility remain operational prerequisites; configuration readiness is not proof that an expired token currently works.

Durable worker contract

`createSocialPlatformAdapter` requires an injected `fetcher`, account credentials, trusted media origins and a fresh `authorize` callback. Authorization binds the current Admin-approved payload, account and production world. TEST authorization never makes external HTTP calls. Public channel authorization does not authorize unsolicited direct messages.

Before calling `advance(input, null)`, the caller must durably claim the publication and mark the mutation attempt. There is at most one publishing mutation in that call. Buffer first performs a read-only account check and refreshes authorization. Network failure after dispatch means `UNKNOWN`, including lost responses; never restart creation because no receipt was saved.

Persist every `PROGRESS.checkpoint` atomically before the next step. It contains no credentials or signed media URLs and binds the publication, approval, account, payload checksum, request fingerprint and provider record. Later `advance` calls with a checkpoint and all `reconcile` calls query status; they do not recreate a post. The caller must load checkpoints only from its protected publication record. Missing or uncertain durable state requires reconciliation, not retrying a publish mutation. Provider failure with an existing checkpoint does not authorize creation of another post. The worker retries transport failures and HTTP 429/5xx from receipt reads only, preserving that checkpoint. A transient failure on the twentieth poll stops as uncertain; invalid receipts and authorization failures are never included in these automatic retries.

Approved media URLs must resolve to the immutable checksum-verified bytes and stay reachable until provider ingestion finishes. The adapter enforces HTTPS and exact configured origins; the signing layer owns object identity, expiry and authorization. Provider credentials only go to fixed API hosts, redirects are refused, response bodies are bounded, errors use stable redacted codes, and requests have a 30-second timeout.