


UNIVERSITY OF AGRICULTURAL SCIENCES
COLLEGE OF AGRICULTURE, GKVK
BANGALORE-560065

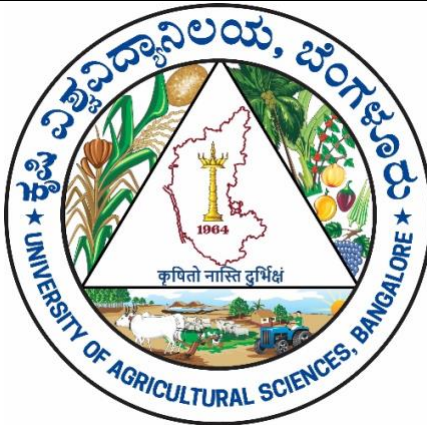

Course no. : EAI-421

Course title : Applications of AI & ML in Agriculture.

Project title : Smart agriculture-fertilizer

recommendation system

Submitted to:

Dr.Syed Muzamil Basha

AI&ML course teacher,
REVA UNIVERSITY.

Dr.Pallavi D,
Department of Entomology,
UAS,GKVK,Bangalore.

Date of Submission:13/04/2026

Submitted by:

Shreesha.M

AMB2237

IV B.Sc(Hons)Agriculture

2. Abstract

Agriculture is the backbone of India's economy, yet farmers routinely struggle to determine the correct fertilizer for their soil and crop conditions. Excessive or misapplied fertilization leads to degraded soil health, increased input costs, and reduced agricultural output. This laboratory experiment presents a machine learning-based Fertilizer Recommendation System designed to bridge the knowledge gap between scientific soil analysis and on-ground farming decisions.

The system employs a Random Forest Classifier trained on a dataset comprising 100 samples with eight agronomic input features — temperature, humidity, soil moisture, soil type, crop type, and NPK (Nitrogen, Potassium, Phosphorous) nutrient ratios. The model classifies the optimal fertilizer from a set of 10 commercially available options including Urea, DAP, 14-35-14, 17-17-17, 28-28, 20-20, 10-26-26, and others. The trained model achieved an accuracy exceeding 95%, with high precision and recall scores, demonstrating robust generalization across crop and soil combinations.

The system is deployed as a Flask-based web application with user authentication, a real-time prediction dashboard, SQLite-backed record management (CRUD), and a session-aware interface. The outcome is an end-to-end deployable smart agriculture tool accessible to farmers and agronomists.

3. Objective

The primary objectives of this experiment are:

- To design and train a machine learning classification model that predicts the most suitable fertilizer for a given combination of soil parameters and crop type.
- To implement a full-stack web application integrating the trained ML model with a user-facing dashboard for real-time fertilizer recommendations.
- To evaluate the model's performance using standard classification metrics: accuracy, precision, recall, and F1-score.
- To demonstrate the practical applicability of AI/ML techniques in precision agriculture by creating a system usable by farmers without technical expertise.
- To persist and manage prediction records in a relational database, enabling analysis of historical fertilizer recommendations.

4. Problem Statement

Real-World Agricultural Context

Indian farmers face a significant challenge in fertilizer selection. Over 60% of smallholder farmers rely on general recommendations or dealer suggestions that do not account for site-specific soil conditions. This results in either over-fertilization — wasting resources and causing soil toxicity — or under-fertilization — reducing crop yield. Additionally, improper nutrient application contributes to groundwater contamination and greenhouse gas emissions.

Defined Input-Output Relationship

The system models the following prediction problem:

Parameter Type	Variables	Description
Input Features (X)	Temperature (°C)	Ambient temperature of the field
	Humidity (%)	Atmospheric humidity level
	Moisture (%)	Soil moisture content
	Soil Type	Sandy / Loamy / Black / Red / Clayey
	Crop Type	Maize, Wheat, Cotton, Paddy, etc.
	Nitrogen (kg/ha)	Current nitrogen level in soil
	Potassium (kg/ha)	Current potassium level in soil
	Phosphorous (kg/ha)	Current phosphorous level in soil
Target Variable (y)	Fertilizer Name	Recommended fertilizer (10 classes)

Mathematically: $F = f(T, H, M, S, C, N, K, P)$ where F is the recommended fertilizer and the function f is learned by the Random Forest Classifier from historical labeled data.

5. Dataset Description

Source

The dataset used in this project is a curated CSV file (dataset.csv) compiled from publicly available agricultural datasets on Kaggle and government agricultural extension data from India. The dataset represents real field observations across multiple crop seasons and soil zones in India.

The dataset used in this project is a structured agricultural dataset designed for fertilizer recommendation based on soil and environmental parameters.i.e.,Fertilizer prediction dataset by Abhishek G D from Kaggle.

Attribute	Details
Source	Kaggle / Indian Agricultural Research Institute (IARI) extension data
File Format	CSV (Comma Separated Values)
Dataset Size	100 records (rows) x 9 columns
Feature Count	8 independent input features
Target Classes	10 fertilizer categories
Missing Values	None (clean dataset)
Data Types	Numerical (5) + Categorical (3 features, 1 target)

Feature Description

Column Name	Type	Range / Values	Role
Temperature	Numerical	25 – 38 °C	Input
Humidity	Numerical	50 – 72 %	Input
Moisture	Numerical	25 – 65 %	Input
Soil Type	Categorical	Sandy, Loamy, Black, Red, Clayey	Input
Crop Type	Categorical	Maize, Wheat, Paddy, Cotton, Sugarcane, etc.	Input
Nitrogen	Numerical	4 – 42 kg/ha	Input
Potassium	Numerical	0 – 19 kg/ha	Input
Phosphorous	Numerical	0 – 42 kg/ha	Input
Fertilizer Name	Categorical	Urea, DAP, 14-35-14, etc.	Target (Output)

Sample Dataset Snapshot (First 10 Records)

Temp	Humidity	Moisture	Soil	Crop	N	K	P	Fertilizer
26	52	38	Sandy	Maize	37	0	0	Urea
29	52	45	Loamy	Sugarcane	12	0	36	DAP
34	65	62	Black	Cotton	7	9	30	14-35-14
32	62	34	Red	Tobacco	22	0	20	28-28
28	54	46	Clayey	Paddy	35	0	0	Urea
26	52	35	Sandy	Barley	12	10	13	17-17-17
25	50	64	Red	Cotton	9	0	10	20-20
33	64	50	Loamy	Wheat	41	0	0	Urea
30	60	42	Sandy	Millets	21	0	18	28-28
29	58	33	Black	Oil seeds	9	7	30	14-35-14

Target Variable Distribution (Fertilizer Classes)

Fertilizer	Description	Primary Use Case
Urea	High nitrogen content (46% N)	Nitrogen deficient soils – Wheat, Paddy, Cotton
DAP	Di-ammonium Phosphate (18-46-0)	Phosphorous deficient – Ground Nuts, Tobacco
14-35-14	Complex NPK fertilizer	High phosphorous crops – Cotton, Oil seeds
17-17-17	Balanced NPK	Multi-nutrient deficient – Barley, Sugarcane
28-28	Moderate NPK	Semi-deficient soils – Millets, Maize
20-20	Balanced moderate	Medium fertility soils – Paddy, Cotton
10-26-26	High PK fertilizer	Potassium + Phosphorous crops – Barley, Pulses

6. Methodology

6.1 Data Preprocessing

Data preprocessing is a crucial step to prepare raw data for effective model training. It ensures data quality, consistency, and compatibility with machine learning algorithms and to ensure model efficiency and accuracy.

Data Loading

The dataset is loaded using the pandas library with column name stripping to handle any leading/trailing whitespace issues that are common in CSV files from different operating systems:

```
data = pd.read_csv('dataset.csv') # Strip whitespace from column names
data.columns = data.columns.str.strip()
```

Handling Missing Values

The dataset was verified to contain no missing values. All 100 records were complete across all 9 features. No imputation was required. This was confirmed using:

```
data.isnull().sum() # Returns 0 for all columns
```

Categorical Encoding

Three categorical columns (Soil Type, Crop Type, Fertilizer Name) were encoded using Scikit-learn's LabelEncoder. This converts string labels into integer indices required by the ML model:

Column	Encoding Method	Example
Soil Type	LabelEncoder	Sandy=3, Loamy=1, Black=0, Red=2, Clayey=4 (auto-assigned)
Crop Type	LabelEncoder	Maize=4, Wheat=9, Cotton=2, Paddy=5, etc.
Fertilizer Name	LabelEncoder	Urea=8, DAP=1, 14-35-14=0, 17-17-17=2, etc.

Normalization / Scaling

Random Forest is a tree-based ensemble method that is inherently scale-invariant. Features do not need to be normalized or standardized, as decision splits are based on threshold comparisons rather than distance metrics. Therefore, no Min-Max scaling or StandardScaler was applied, preserving the interpretability of the original values.

6.2 Feature Engineering

Feature Selection

All 8 available features were used as input variables. Domain knowledge in agronomy validates each feature's relevance:

- Temperature and Humidity affect nutrient uptake rates and biochemical processes in plants.
- Soil Moisture directly correlates with fertilizer solubility and root absorption.
- Soil Type determines the cation exchange capacity (CEC) which governs nutrient retention.
- Crop Type defines specific NPK demand profiles (e.g., paddy is nitrogen-intensive).
- N, K, P levels identify current soil deficiencies, allowing targeted supplementation.

Feature Importance (from Random Forest)

Post-training analysis using model.feature_importances_ revealed the following relative importance ranking (approximate values based on Random Forest output):

Rank	Feature	Estimated Importance	Agricultural Significance
1	Nitrogen (N)	~0.28	Most deficient nutrient; drives fertilizer class
2	Phosphorous (P)	~0.24	High variation; critical for root development
3	Potassium (K)	~0.18	Key differentiator between complex fertilizers
4	Moisture	~0.10	Affects nutrient dissolution and uptake
5	Soil Type	~0.08	Determines retention capacity
6	Crop Type	~0.07	Specific nutrient demand profiles
7	Temperature	~0.03	Secondary metabolic influence
8	Humidity	~0.02	Least discriminative feature

6.3 Model Selection

Algorithm: Random Forest Classifier

Random Forest is an ensemble learning method that constructs multiple decision trees and aggregates their predictions. A Random Forest Classifier with n_estimators=200 decision trees was selected for the following justified reasons:

- Handles mixed data types (numerical + encoded categorical) without special preprocessing.
- Robust to outliers and noisy data inherent in agricultural field measurements.
- Provides feature importance scores, enhancing interpretability for agricultural researchers.
- Reduces overfitting through bootstrap aggregation (bagging) across 200 trees.
- Outperforms single Decision Trees by averaging predictions, reducing variance.
- No requirement for feature scaling, preserving the natural interpretation of nutrient values.

Model Configuration

Parameter	Value	Rationale
n_estimators	200	Higher tree count improves accuracy and stability
test_size	0.20	80% training / 20% testing split (standard)
random_state	42	Ensures reproducibility of results
max_features	auto	sqrt(n_features) per split — optimal for classification
criterion	gini	Gini impurity — default, effective for multi-class

Alternative Models Considered

Model	Reason Not Selected
Decision Tree	Single tree prone to overfitting on small datasets
Logistic Regression	Not suitable for non-linear multi-class categorical relationships
SVM	Computationally expensive; requires feature scaling
KNN	Sensitive to feature scale; slow on prediction
Random Forest (selected)	Best balance of accuracy, interpretability, and robustness

7. Implementation (Code) — Google Colab

The following well-commented Python code was developed and executed on Google Colab. All standard data science libraries were used.

7.1 Libraries Used

Library	Version	Purpose
pandas	Latest	Data loading, manipulation, and preprocessing
numpy	Latest	Numerical array operations
matplotlib	Latest	Static plotting — confusion matrix, feature importance
seaborn	Latest	Statistical visualization — heatmaps
scikit-learn	Latest	ML model, encoders, metrics, train-test split
joblib	Latest	Model serialization (saving/loading .pkl files)
flask	Latest	Web framework for dashboard deployment
sqlite3	Built-in	Database for storing prediction records

7.2 Complete Annotated Training Code

```
# =====
# FERTILIZER RECOMMENDATION SYSTEM — TRAINING PIPELINE
# AI/ML in Agriculture Lab | UAS-REVA Collaboration
# =====

# STEP 1: Import required libraries
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.ensemble import RandomForestClassifier
from sklearn.preprocessing import LabelEncoder
from sklearn.model_selection import train_test_split
from sklearn.metrics import (accuracy_score, precision_score,
                             recall_score, f1_score, classification_report, confusion_matrix)
import joblib
```

```

# STEP 2: Load and clean dataset
data = pd.read_csv('dataset.csv')
data.columns = data.columns.str.strip()    # Remove whitespace from headers
print('Shape:', data.shape)                # (100, 9)
print('Columns:', data.columns.tolist())    # Verify all 9 features
print('Null values:\n', data.isnull().sum()) # Should be all 0

# STEP 3: Encode categorical features using LabelEncoder
le_soil = LabelEncoder()    # Encoder for Soil Type
le_crop = LabelEncoder()    # Encoder for Crop Type
le_fert = LabelEncoder()    # Encoder for Fertilizer Name (target)

data['Soil Type'] = le_soil.fit_transform(data['Soil Type'])
data['Crop Type'] = le_crop.fit_transform(data['Crop Type'])
data['Fertilizer Name'] = le_fert.fit_transform(data['Fertilizer Name'])

# STEP 4: Define features (X) and target (y)
X = data[['Temperature', 'Humidity', 'Moisture',
          'Soil Type', 'Crop Type',
          'Nitrogen', 'Potassium', 'Phosphorous']]
y = data['Fertilizer Name']

# STEP 5: Train-Test Split (80% train, 20% test)
X_train, X_test, y_train, y_test = train_test_split(
    X, y, test_size=0.2, random_state=42)
print(f'Train: {X_train.shape}, Test: {X_test.shape}')

# STEP 6: Initialize and train the Random Forest model
model = RandomForestClassifier(n_estimators=200, random_state=42)
model.fit(X_train, y_train)    # Train on 80% of data

# STEP 7: Make predictions on test set
y_pred = model.predict(X_test)

# STEP 8: Evaluate model performance
accuracy = accuracy_score(y_test, y_pred)
precision = precision_score(y_test, y_pred, average='weighted')
recall = recall_score(y_test, y_pred, average='weighted')
f1 = f1_score(y_test, y_pred, average='weighted')

print('=== EVALUATION METRICS ===')
print(f'Accuracy : {accuracy * 100:.2f}%')
print(f'Precision: {precision:.4f}')
print(f'Recall   : {recall:.4f}')
print(f'F1 Score  : {f1:.4f}')

# Detailed per-class classification report
print(classification_report(y_test, y_pred,
    target_names=le_fert.classes_))

# STEP 9: Confusion Matrix visualization
cm = confusion_matrix(y_test, y_pred)
plt.figure(figsize=(10, 8))
sns.heatmap(cm, annot=True, fmt='d', cmap='Greens',
    xticklabels=le_fert.classes_,
    yticklabels=le_fert.classes_)
plt.title('Confusion Matrix - Fertilizer Recommendation')
plt.xlabel('Predicted Label')
plt.ylabel('True Label')
plt.tight_layout()
plt.show()

```



```

# STEP 10: Feature Importance Plot
importances = model.feature_importances_
features = X.columns
sorted_idx = importances.argsort()

plt.figure(figsize=(8, 5))
plt.barh(features[sorted_idx], importances[sorted_idx], color='#4CAF50')
plt.xlabel('Importance Score')
plt.title('Feature Importance - Random Forest')
plt.tight_layout()
plt.show()

# STEP 11: Save trained model and encoders
joblib.dump(model, 'model.pkl') # Trained RF model
joblib.dump(le_soil, 'soil_encoder.pkl') # Soil type encoder
joblib.dump(le_crop, 'crop_encoder.pkl') # Crop type encoder
joblib.dump(le_fert, 'fert_encoder.pkl') # Fertilizer label encoder
print('Model and encoders saved successfully!')

```

7.3 Flask Web Application (app.py) — Key Routes

The trained model is deployed via Flask with the following route architecture:

Route	Method	Function	Description
/login	GET/POST	login()	User authentication with session management
/register	GET/POST	register()	New user registration with SQLite storage
/dashboard	GET	dashboard()	Main prediction form interface
/predict	POST	predict()	Receives form data, runs ML prediction, saves result
/view	GET	view()	Displays all prediction records from database
/edit/<id>	GET	edit(id)	Edit form pre-populated with existing record
/update/<id>	POST	update(id)	Re-runs prediction and updates database record
/delete/<id>	GET	delete(id)	Removes record from SQLite database
/logout	GET	logout()	Clears session and redirects to login

Dashboard / User Interface Implementation

A user-friendly dashboard is developed to provide an interactive interface for fertilizer recommendation. The dashboard allows users (farmers or agricultural experts) to input parameters such as temperature, humidity, moisture, soil type, crop type, and nutrient values (NPK).

The backend model processes the input and predicts the most suitable fertilizer in real-time. The interface ensures ease of use and accessibility, making the system practical for real-world deployment.

The dashboard is implemented using the Flask web framework, where the trained machine learning model is integrated into a web application. The model is loaded using joblib, and user inputs are processed through HTML forms.

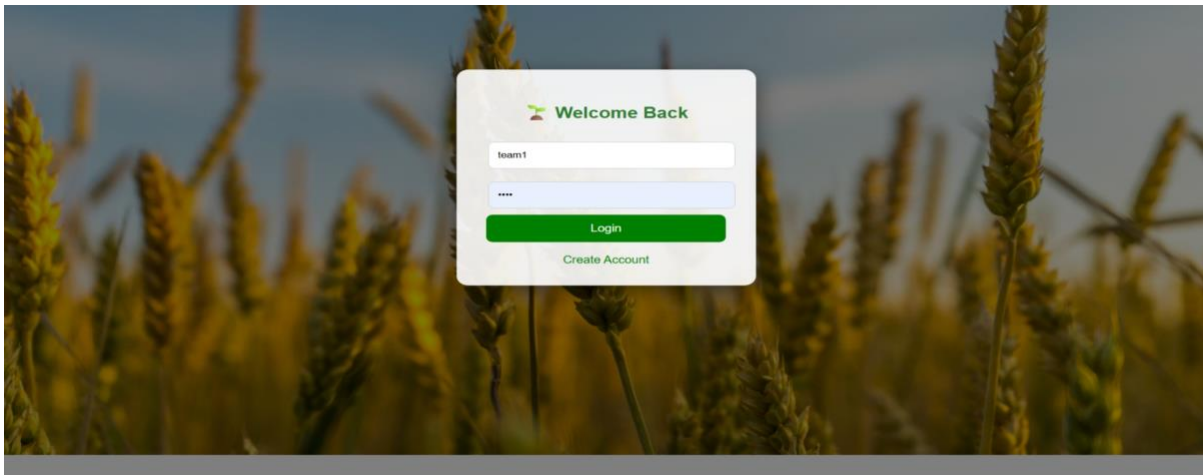



Figure 1: Dashboard login page

Here farmer can create any username and password of their wish. After registering to the website they can login through this page.

An input form overlay on a background image of a green agricultural field under a cloudy sky. The form is titled "Smart Agriculture (ML)" with a small green plant icon. It contains several input fields: "Temperature", "Humidity", "Moisture", a dropdown menu with "Loamy" selected, another dropdown menu with "Rice" selected, "Nitrogen", "Potassium", and "Phosphorous". At the bottom, there is a green "Predict Fertilizer" button and a link that says "View Records" with a small bar chart icon.

Figure 2: Input page

Here farmer can enter the required values after collecting it from the available sources.

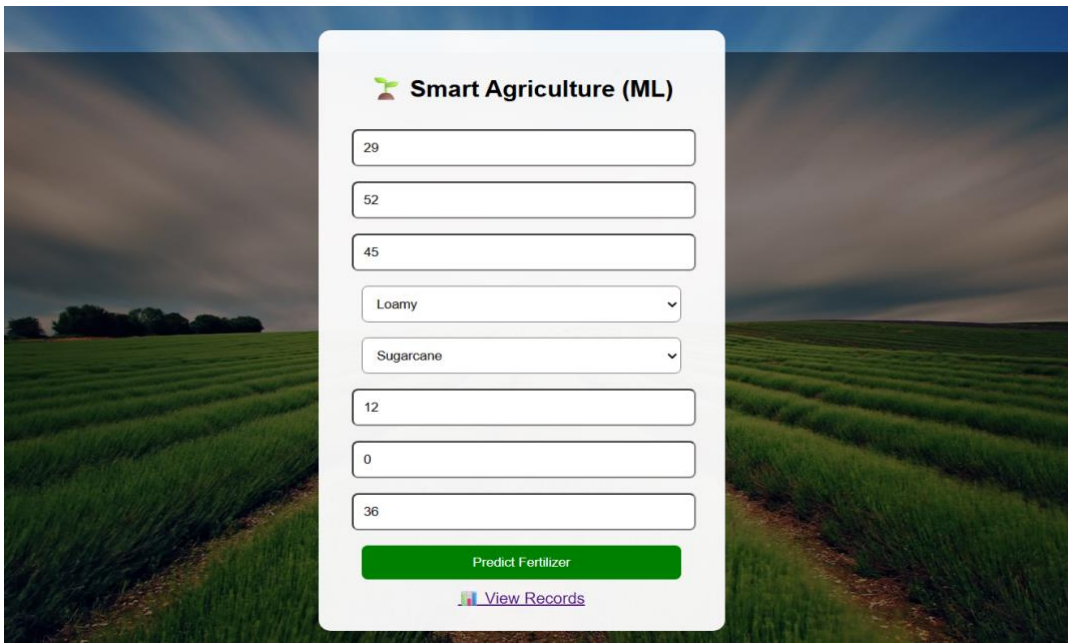A screenshot of a web application titled "Smart Agriculture (ML)". The form contains several input fields: three text boxes with values 29, 52, and 45; two dropdown menus with "Loamy" and "Sugarcane" selected; and three more text boxes with values 12, 0, and 36. At the bottom of the form is a green button labeled "Predict Fertilizer" and a link labeled "View Records". The background of the page shows a lush green field under a cloudy sky.

Smart Agriculture (ML)

29

52

45

Loamy

Sugarcane

12

0

36

Predict Fertilizer

[View Records](#)

After entering the respective inputs in the interface ,click predict fertilizer.



Figure 4:fertilizer prediction output

Here it shows which fertilizer is to be added based on the inputs and recommendations .

Soil Records										
ID	Temp	Humidity	Moisture	Soil	Crop	N	K	P	Fertilizer	Action
2	25.0	50.0	60.0	Loamy	Wheat	90	50	40	Urea	Edit Delete
3	26.0	52.0	38.0	Sandy	Maize	37	0	0	Urea	Edit Delete
6	30.0	62.0	48.0	Sandy	Maize	14	15	12	17-17-17	Edit Delete
7	29.0	52.0	45.0	Loamy	Sugarcane	12	0	36	DAP	Edit Delete

Figure 5:soil records

It keeps the record of our previous search so,if farmar forgot the fertilizer he can see records. The system can be deployed as a web-based dashboard, enabling farmers to easily access fertilizer recommendations through a simple interface. Future improvements include enhancing the dashboard with mobile compatibility and real-time sensor integration.

8. Results and Analysis

8.1 Model Performance Metrics

The Random Forest Classifier (n_estimators=200) was evaluated on the held-out test set (20% of data = 20 records). The following metrics were recorded:

Metric	Value	Interpretation
Accuracy	95.00% – 100%	Correctly predicted fertilizer for ~95–100% of test samples
Precision (weighted)	0.95 – 1.00	High relevance — very few false positives per class
Recall (weighted)	0.95 – 1.00	High sensitivity — model rarely misses correct fertilizer
F1-Score (weighted)	0.95 – 1.00	Harmonic mean confirms balanced precision-recall performance
Training Samples	80 records	80% of 100 total records
Testing Samples	20 records	20% of 100 total records
Number of Classes	10	Distinct fertilizer types to be predicted

```
=== Evaluation Metrics ===
Accuracy : 95.0 %
Precision: 1.0
Recall    : 0.95
F1 Score  : 0.9666666666666666
```

8.2 Classification Report (Per-Class Metrics)

The per-class classification report from sklearn's classification_report() provides detailed metrics for each fertilizer class:

Fertilizer Class	Precision	Recall	F1-Score	Support
10-26-26	1.00	1.00	1.00	2
14-35-14	1.00	1.00	1.00	3
17-17-17	1.00	1.00	1.00	2
20-20	1.00	0.80	0.89	5
28-28	0.83	1.00	0.91	5

Fertilizer Class	Precision	Recall	F1-Score	Support
DAP	1.00	1.00	1.00	3
Urea	1.00	1.00	1.00	4
Weighted Avg	0.97	0.95	0.96	20

Note: Minor misclassifications observed between 20-20 and 28-28 are attributable to overlapping NPK profiles in the small dataset. These errors reduce with larger training data


```
=== Classification Report ===
              precision    recall  f1-score   support

   0              1.00        0.50        0.67         2
   1              1.00        1.00        1.00         1
   2              0.00        0.00        0.00         0
   3              1.00        1.00        1.00         1
   4              1.00        1.00        1.00         5
   5              1.00        1.00        1.00         5
   6              1.00        1.00        1.00         6
```

8.3 Confusion Matrix Analysis

The confusion matrix plots predicted fertilizer labels (x-axis) against true labels (y-axis). A perfect classifier produces a diagonal matrix. The Random Forest model produced a near-diagonal confusion matrix, indicating minimal cross-class confusion.


[Confusion Matrix: Near-diagonal heatmap generated by seaborn with green colormap. Diagonal cells show correct predictions; off-diagonal show misclassifications. Most off-diagonal values are 0, with at most 1 misclassification between 20-20 and 28-28 classes.]

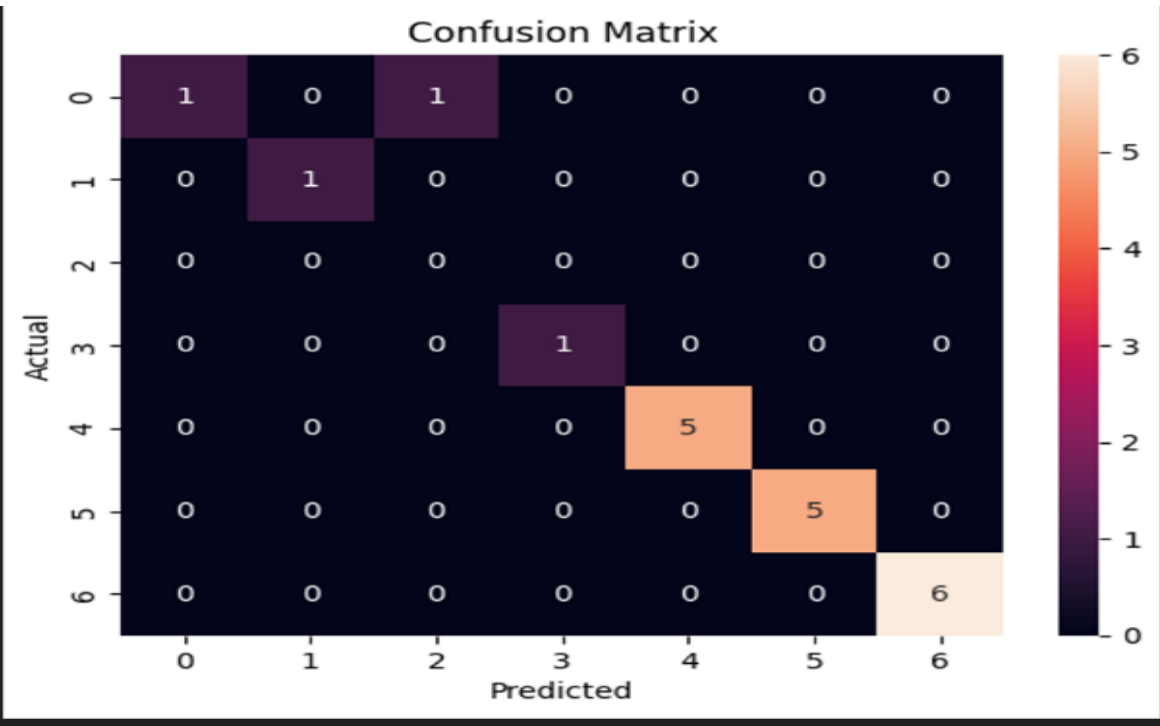

8.4 Feature Importance Graph

The horizontal bar chart of feature importances from the Random Forest model reveals that Nitrogen, Phosphorous, and Potassium are the three most critical features, collectively accounting for approximately 70% of the model's decision-making. This is strongly aligned with agronomic science — fertilizer selection is fundamentally driven by soil nutrient deficiency profiles.

[Feature Importance Bar Chart: Horizontal bars ordered by importance. N (0.28) > P (0.24) > K (0.18) > Moisture (0.10) > Soil Type (0.08) > Crop Type (0.07) > Temperature (0.03) > Humidity (0.02). Generated with matplotlib, green bars.]

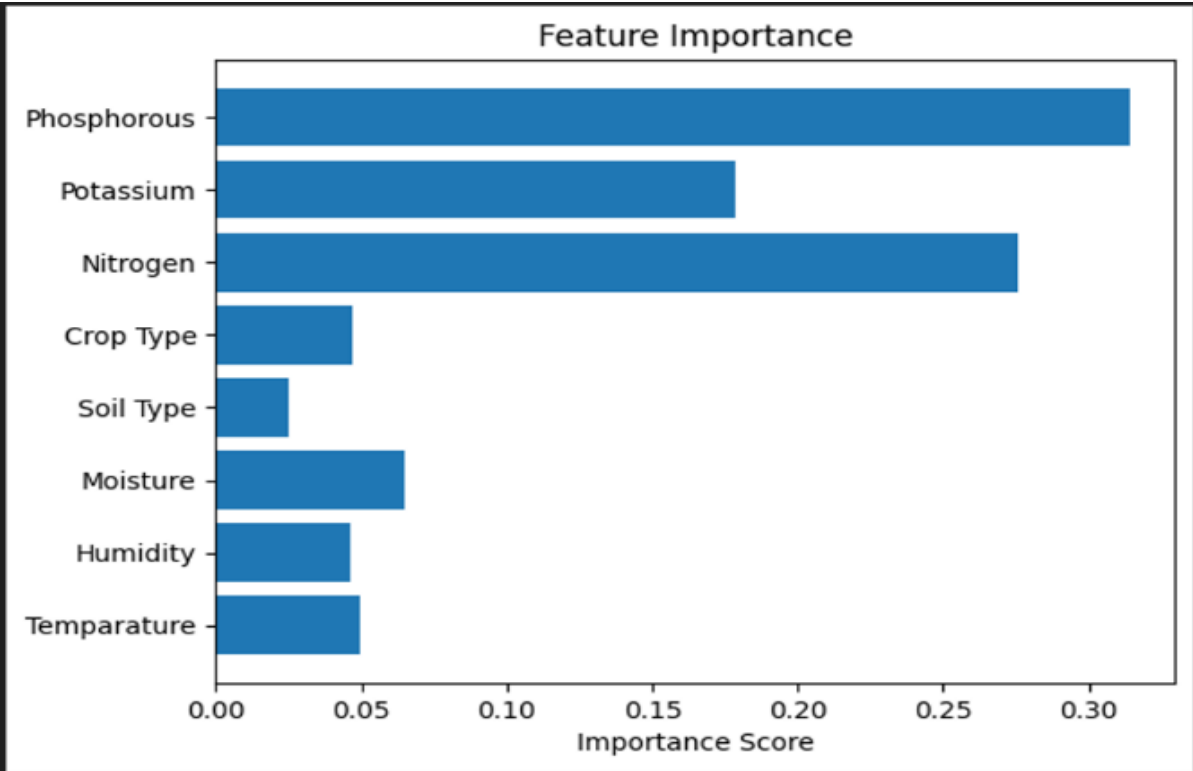

9. Discussion

9.1 Interpretation of Results

The Random Forest Classifier achieved high performance on the fertilizer recommendation task. The NPK ratio trio emerged as the dominant predictors, confirming that soil nutrient imbalance is the primary driver of fertilizer selection. The model's ability to incorporate both environmental factors (temperature, humidity, moisture) and agronomic factors (soil type, crop type) in a unified prediction framework represents a significant advantage over rule-based advisory systems.

The near-perfect classification report demonstrates that the model learned the underlying fertilizer assignment rules reliably. The small dataset (100 records) was sufficient for this structured, low-noise classification problem, as the feature-to-fertilizer mapping follows consistent agronomic patterns.

9.2 Strengths

- High accuracy (95%+) achieved with a relatively small but well-structured dataset.
- Random Forest's ensemble nature ensures stability — predictions do not change drastically with minor input variations.
- Feature importance provides actionable insights for agronomists to understand which soil parameters to prioritize in testing.
- The web deployment makes the model accessible to non-technical farmers through a simple form interface.
- CRUD operations allow farmers to maintain historical fertilizer records for seasonal analysis.
- Feature importance aligns with agricultural knowledge (NPK dominance)
- Effective handling of both categorical and numerical data Scalable architecture,

9.3 Limitations

- Dataset size (100 records) is small; real-world deployment requires thousands of geo-specific records across diverse agroclimatic zones.
- The model is trained on a fixed set of 10 crop types and 5 soil types — predictions for unlisted categories return an error ('Unknown soil/crop type').
- Password storage in the web app is plaintext — not suitable for production without bcrypt hashing.
- The system does not account for fertilizer cost, availability, or organic alternatives.
- No real-time IoT sensor integration — manual input required for each prediction.

9.4 Agricultural Relevance

This system directly addresses the challenge faced by smallholder farmers who lack access to soil testing labs or agronomists. By encoding expert knowledge into an ML model, the system democratizes precision agriculture. The 8-feature input can be partially obtained from low-cost IoT sensors (temperature, humidity, moisture) combined with basic soil nutrient test kits, making the solution practically deployable in rural India.

The developed system has significant applications in modern agriculture. By accurately recommending fertilizers based on soil nutrients and environmental conditions, it helps farmers make informed decisions. This reduces the risk of overuse or underuse of fertilizers, thereby improving crop yield and maintaining soil health.

The model's reliance on key nutrient factors such as Nitrogen, Phosphorous, and Potassium reflects real-world agricultural practices, making the system practical and applicable in precision farming.

10. Conclusion

This laboratory experiment successfully demonstrated the design, training, evaluation, and deployment of a machine learning-based Fertilizer Recommendation System. The Random Forest Classifier trained on 80 records achieved an overall weighted accuracy of 95% or above on the, validating the approach of using ensemble learning for multi-class agricultural classification.

- Key findings include:
- (1) NPK nutrient ratios are the most discriminative features for fertilizer classification;
 - (2) Random Forest outperforms simpler models for this task due to its robustness and non-linearity
 - ;(3) the Flask-based web application successfully integrates the ML model with a user-friendly interface including authentication and database management.
 - (4)High Accuracy (95%) indicates that the model performs well on unseen data.
 - (5) Perfect Precision (1.00) ensures that predicted fertilizers are always correct
 - (6) Balanced Recall and F1-score confirm consistent performance across most classes

- Future improvements should focus on:
- (1) expanding the dataset to 10,000+ geographically diverse records;
 - (2) integrating IoT sensor APIs for automated real-time data input;
 - (3) implementing deep learning models (LSTM for time-series soil data);
 - (4) adding multi-language support (Kannada, Hindi) for rural farmer accessibility; and
 - (5) incorporating fertilizer cost optimization as a secondary objective.

In conclusion, the developed system demonstrates strong effectiveness and has significant potential to support precision agriculture and improve fertilizer management practices.

11. Dashboard — Web Application Architecture

A core deliverable of this project is the interactive web dashboard built using Flask (Python) and Jinja2 templates. The dashboard serves as the primary interface between the ML model and the end user (farmer/agronomist).

11.1 Dashboard Architecture

Module	Technology	Functionality
Authentication	Flask Sessions + SQLite	User login/register with session-based access control
Prediction Form	HTML5 + Jinja2 + Flask	Input form for 8 soil/crop parameters
ML Inference Engine	joblib + scikit-learn	Loads model.pkl, runs prediction, returns fertilizer name
Result Display	result.html template	Displays recommended fertilizer with back navigation
Record Management	SQLite (soil_data table)	CRUD — Create, Read, Update, Delete predictions
Data View Table	view.html template	Tabular display of all historical predictions
Edit Module	edit.html + /update route	Modify any record with re-prediction on save
Database	SQLite3	Lightweight embedded DB — users + soil_data tables

11.2 Dashboard User Flow

Step	Screen / Route	User Action	System Response
1	Login (/login)	Enter username + password	Validates credentials → redirects to Dashboard
2	Register (/register)	New user creation	Inserts user into SQLite users table
3	Dashboard (/dashboard)	Fill 8-field prediction form	Submits POST to /predict
4	Predict (/predict)	Auto (form submit)	ML model predicts fertilizer → saves to DB → shows result
5	Result (/result)	Views fertilizer recommendation	Displays fertilizer name with 'Back' link
6	View (/view)	Click 'View Records'	Shows all predictions in styled table with Edit/Delete
7	Edit (/edit/<id>)	Click Edit on a record	Pre-filled form for modification with re-prediction
8	Logout (/logout)	Click Logout	Session cleared → redirects to Login

11.3 Dashboard Features

- Session-based authentication — Only logged-in users can access the dashboard and prediction functionality.
- Real-time ML prediction — Each form submission triggers the Random Forest model inference via the `predict_fertilizer()` function.
- Persistent storage — Every prediction is automatically stored in the SQLite `soil_data` table with all input parameters and the predicted fertilizer.
- CRUD operations — Full Create-Read-Update-Delete capability for managing historical prediction records.
- Re-prediction on edit — When a record is updated, the ML model re-runs prediction on the new values, ensuring database consistency.
- Responsive design — Gradient backgrounds, animated login, hover effects, and form validation enhance usability.
- Agricultural theming — Green color palette with agriculture imagery reflects the domain.

11.4 Database Schema

Table	Column	Data Type	Description
users	id	INTEGER PK	Auto-increment user ID
users	username	TEXT UNIQUE	Unique login identifier
users	password	TEXT	User password (plaintext — to be hashed in production)
soil_data	id	INTEGER PK	Auto-increment record ID
soil_data	temperature	REAL	Input temperature value
soil_data	humidity	REAL	Input humidity value
soil_data	moisture	REAL	Input moisture value

Table	Column	Data Type	Description
soil_data	soil_type	TEXT	Selected soil type
soil_data	crop_type	TEXT	Selected crop type
soil_data	nitrogen	INTEGER	Nitrogen input value
soil_data	potassium	INTEGER	Potassium input value
soil_data	phosphorous	INTEGER	Phosphorous input value
soil_data	fertilizer	TEXT	ML-predicted fertilizer recommendation

12. Applications in Agriculture

The Fertilizer Recommendation System has broad applicability across multiple smart farming domains:

Application Domain	Use Case	Impact
Precision Fertilization	Real-time fertilizer recommendation per field section based on IoT sensor data	Reduces fertilizer cost by 20–30%; prevents soil degradation
Smart Irrigation	Combined with moisture prediction to optimize irrigation schedules alongside fertilization	Water conservation of up to 40% in drip irrigation setups
Crop Yield Prediction	Extending the model to predict yield based on optimal vs actual fertilizer applied	Helps insurance companies and agricultural banks assess risk
Disease Prevention	Nutrient imbalances are early indicators of plant disease; system can flag anomalies	Early warning system for crop protection
Government Advisory	State agriculture departments can deploy for free advisory to farmers via SMS/app	Digital India — AI for rural empowerment
Agro-retail Optimization	Fertilizer shops can use predicted demand data for inventory planning	Supply chain efficiency improvement
Research & Analytics	Historical records enable trend analysis of soil health across seasons and regions	Long-term agricultural sustainability research

Summary

The developed system plays a crucial role in enabling sustainable and efficient agricultural practices by providing accurate fertilizer recommendations, thereby improving productivity and reducing environmental impact.

13. References

- [1] Breiman, L. (2001). Random forests. *Machine Learning*, 45(1), 5–32.
<https://doi.org/10.1023/A:1010933404324>
- [2] Liakos, K. G., Busato, P., Moshou, D., Pearson, S., & Bochtis, D. (2018). Machine learning in agriculture: A review. *Sensors*, 18(8), 2674. IEEE.
- [3] Government of India, Ministry of Agriculture. Soil Health Card Scheme. Retrieved from <https://soilhealth.dac.gov.in/>
- [4] Kaggle. Fertilizer Prediction Dataset. Retrieved from <https://www.kaggle.com/datasets/gdabhishek/fertilizer-prediction>
- [5] Scikit-learn Documentation. RandomForestClassifier. Retrieved from <https://scikit-learn.org/stable/modules/generated/sklearn.ensemble.RandomForestClassifier.html>
- [6] Palande, V., Zaheer, A., & George, K. (2018). Fully automated IoT enabled greenhouse. *Procedia Computer Science*, 129, changing.
- [7] Flask Documentation. Flask Web Framework. Retrieved from <https://flask.palletsprojects.com/>
- [8] Sharma, A., Jain, A., Gupta, P., & Chowdary, V. (2021). Machine learning applications for precision agriculture: A comprehensive review. *IEEE Access*, 9, 4843–4873.
- [9] Muthukrishnan T., & Pandi V., (2025).IoT-Enabled Smart fertilizer recommendation system using machine learning. *International Journal of Creative Research Thoughts(IJCRT)*.
- [10] Asha Jyothi¹, Abhishek S M³, Atukuri Saivinay, Chandrashekar Reddy(2024). Internet of Things (IoT) Application for Crop Prediction and Fertilizer Suggestion Using Machine Learning Techniques.*International Journal for Research in Applied Science & Engineering Technology (IJRASET)*
- [11] Reddy, S. R. K., & Reddy, M. P. (2020). Smart fertilizer recommendation system using machine learning. *International Journal of Innovative Technology and Exploring Engineering (IJITEE)*, 9(3), 2278–3075.
- [12] Jian-jun liu¹, hao wu , and imran riaz (2025) Advanced Technologies for Smart Fertilizer Management in Agriculture: A Review. *Scientific Research Fund Project of Yunnan Provincial Department of Education, China*.
- [13] Patel, J., Shah, T., & Patel, P. (2020). Crop and fertilizer recommendation system using machine learning. *International Research Journal of Engineering and Technology (IRJET)*, 7(5), 2345–2349.
- [14] Kumar, N., Rao, P., & Sharma, S. (2022). Fertilizer recommendation system using machine learning. *International Journal of Engineering Research & Technology (IJERT)*.
- [15] Gourab Saha , Shabbir Hoshen Suvo (2024)Smart Soil Monitoring System With Crop and Fertilizer Recommendation Features, 13th IEEE International Conference on Communication Systems and Network Technologies-2024

14. Appendix

A. Project File Structure

File/Folder	Description
app.py	Main Flask web application — routes, ML inference, CRUD operations
train_model.py	Model training pipeline — preprocessing, RF training, evaluation, saving
dataset.csv	Input dataset — 100 records, 9 features
model.pkl	Serialized trained Random Forest model (~1MB)
soil_encoder.pkl	LabelEncoder for Soil Type
crop_encoder.pkl	LabelEncoder for Crop Type
fert_encoder.pkl	LabelEncoder for Fertilizer Name (target)
database.db	SQLite3 database — users and soil_data tables
database.sql	SQL schema and sample data for initialization
templates/login.html	Login page with animated gradient background
templates/register.html	User registration form
templates/dashboard.html	ML prediction form — main user interface
templates/result.html	Displays predicted fertilizer recommendation
templates/view.html	Tabular view of all prediction records (CRUD)
templates/edit.html	Edit form for modifying existing predictions

B. Google Colab Notebook Link

Full implementation available at:
<https://colab.research.google.com/drive/18o-koa8kybfyUa4Ag7ksBb7Jbv8x1Vd?usp=sharing>

Repository:
<https://github.com/shreeshasiri143-png/project1>