a Keys of one query tile, to scale



drawn with
$s = 4$
$n_0 = 8$
$t = 2$

query tile, $t \times t$
local: $n_0 \times n_0$ window, query at p
global: $n_0 \times n_0$ block centres, query at $\lfloor p/s \rfloor$

b Per-head mix and schedule
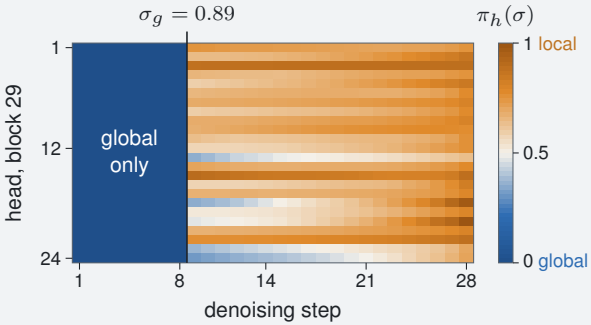
$$O_h = \pi_h(\sigma)\, O_h^{\mathrm{loc}} + \big(1 - \pi_h(\sigma)\big)\, O_h^{\mathrm{glob}}$$