

Week 9 Assignment Screenshots


Admin Profile:

The screenshot shows a web browser window for 'FlightApp' at 'localhost:4200/profile'. The title bar says 'FlightApp'. The address bar shows the URL. Below the address bar is a toolbar with icons for Chubb, COS - GE careers, Imported From IE, and Charges. The main navigation bar at the top has links for Flight App, Home, Flights, Dashboard, User, admin, and LogOut. The main content area is titled 'admin Profile'. It displays the email 'admin@gmail.com' and a list of roles: 'ROLE_USER' and 'Change Password'.

Adding flights:

The screenshot shows a web browser window for 'FlightApp' at 'localhost:4200/admin'. The title bar says 'FlightApp'. The address bar shows the URL. Below the address bar is a toolbar with icons for Chubb, COS - GE careers, Imported From IE, and Charges. The main navigation bar at the top has links for Flight App, Home, Flights, Dashboard, Admin Board, User, admin, and LogOut. The main content area is titled 'Add a new flight'. It contains a form with fields for Airline, Flight ID, From Place, To Place, Departure time, Arrival time, Flight date, Total seats, and Price per seat. There is also a 'Submit' button.

Flight added successfully:

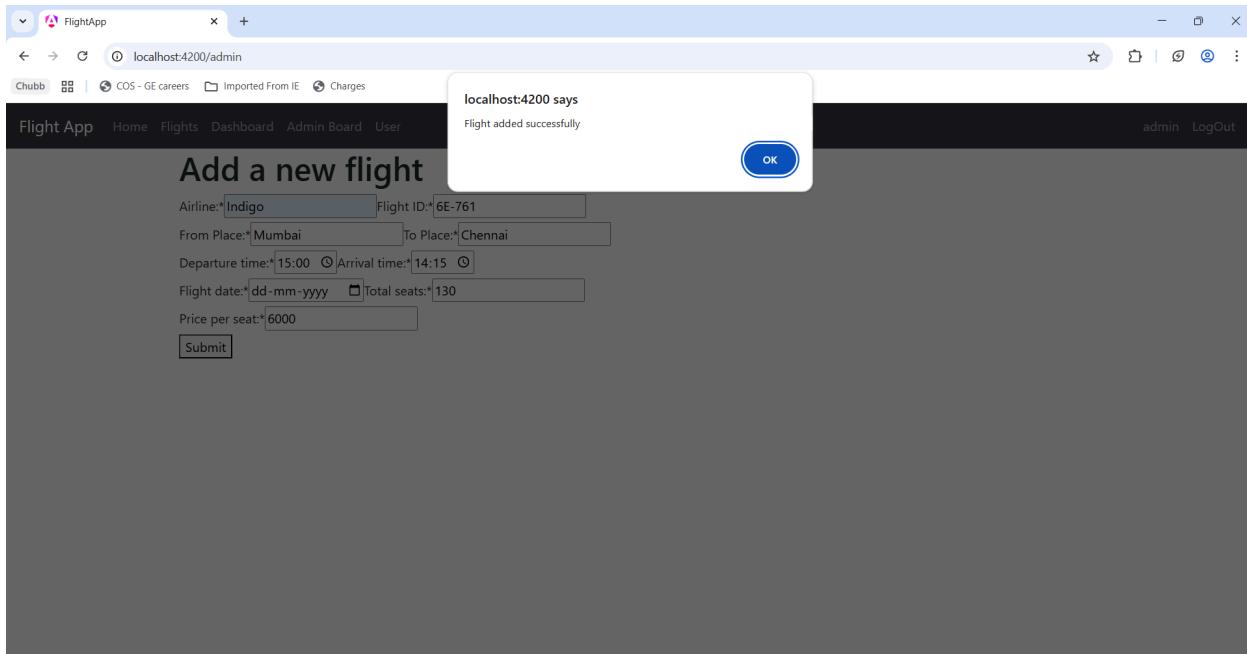

In mongodb:

A screenshot of the MongoDB Compass interface connected to "localhost:27017". The left sidebar shows connections to "localhost:27017" with databases "admin", "bookingservice", "users", "config", "flightservice", and "local". The "flightservice" database is selected, and the "flights" collection is shown in the main pane. The collection has 3 documents. The first document is:

```

_id: ObjectId('6942ebd87d26f56d17021c92')
airline : "Indigo"
fromPlace : "Delhi"
toPlace : "Chennai"
flightName : "6E-502"
departureTime : "09:30"
arrivalTime : "12:40"
flightDate : "2025-12-08"
totalSeats : 120
price : 4500
__class : "com.flighthapp.flightservice.model.Flight"
  
```

The second document is:

```

_id: ObjectId('6942ebd87d26f56d17021c93')
airline : "Indigo"
fromPlace : "Delhi"
toPlace : "Chennai"
flightName : "6E-502"
departureTime : "09:30"
arrivalTime : "12:40"
flightDate : "2025-12-08"
totalSeats : 120
price : 4500
__class : "com.flighthapp.flightservice.model.Flight"
  
```


The third document is:

```


_id: ObjectId('6942ebd87d26f56d17021c94')
airline : "Indigo"
fromPlace : "Mumbai"
toPlace : "Chennai"
flightName : "6E-761"
departureTime : "15:00"
arrivalTime : "14:15"
flightDate : ""
totalSeats : 130
price : 6000
__class : "com.flighthapp.flightservice.model.Flight"
  
```

Change Password:

Change password if more than 10 days:

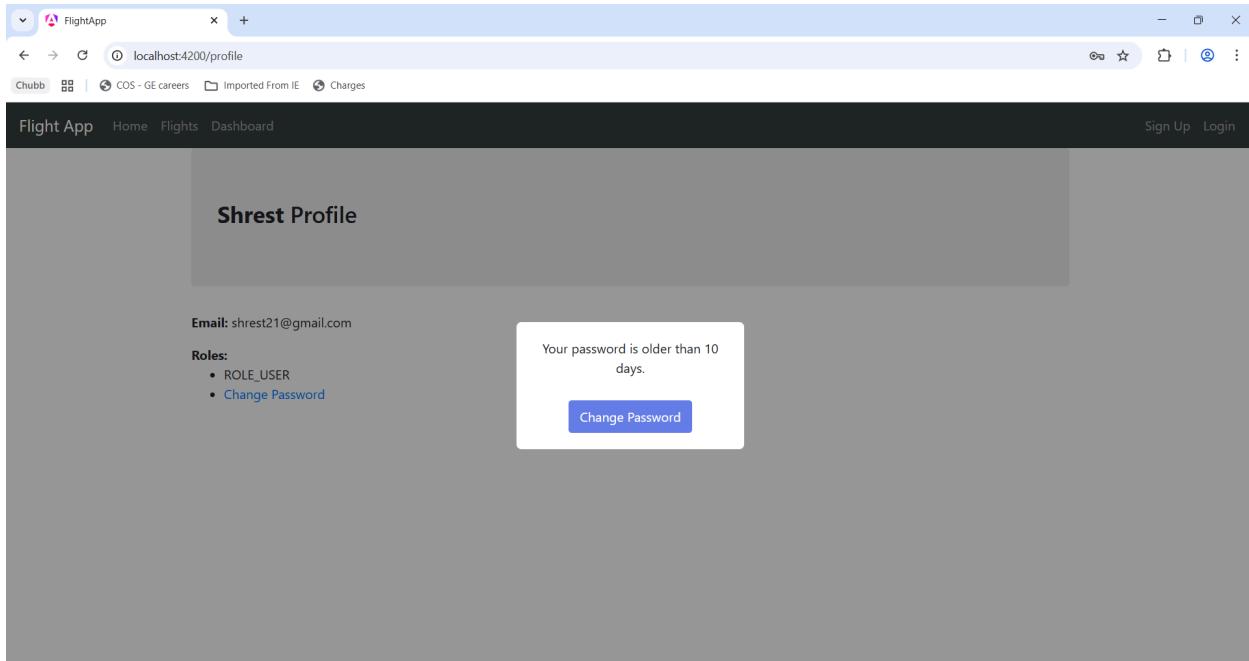

Change Password option in Profile page:

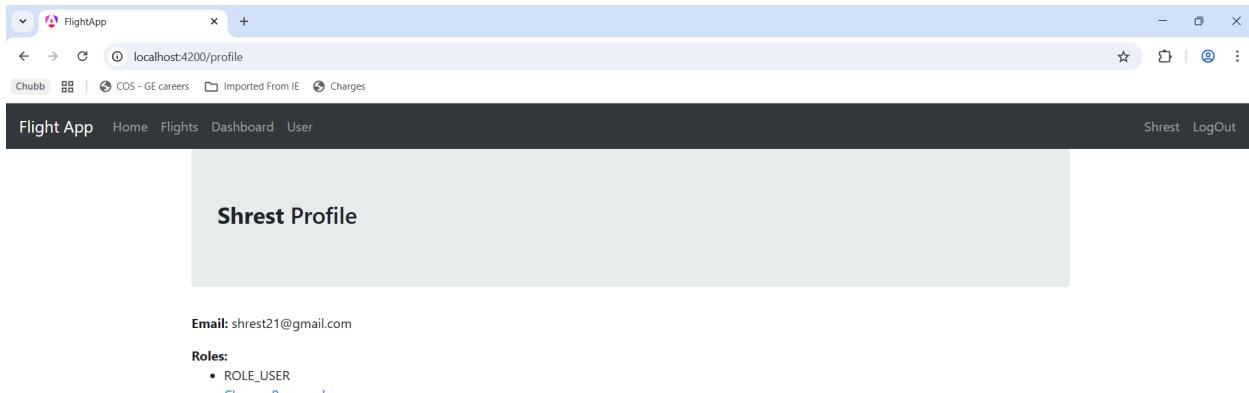

Change Password:

Welcome to Change Password

New Password:

Retype New Password:

New password and old password cannot be same:

Welcome to Change Password

New Password:

Retype New Password:

[vite] connecting...
[vite] connected.
Angular is running in development mode.
[VSC] Content script initialized
client:489
client:612
core.js:2969
content.js:85
change.component.ts:39

```
HttpErrorResponse {error: "New password cannot be same as old password"}  

headers: _HttpHeaders {normalizedNames: Map(0), lazyUpdate: null, lazyInit: false}  

message: "Http failure response for http://localhost:8085/api/auth/change: 400 Bad Request"  

name: "HttpErrorResponse"  

ok: false  


status: 400  

statusText: "Bad Request"  

url: "http://localhost:8085/api/auth/change"  

[[Prototype]]: HttpResponseBase
```

Recheck Password and New password field should be same:

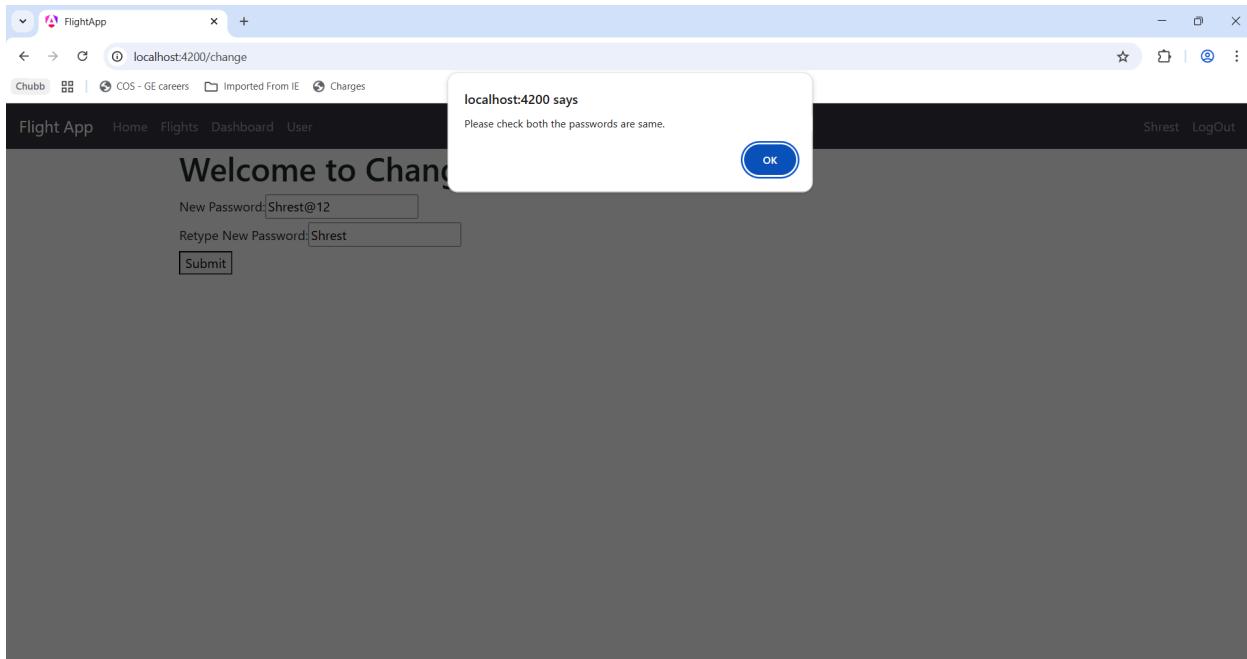

Password change successful :

