Control Statements

Exercises

Week 3

Prior to attempting these exercises ensure you have read the lecture notes and/or viewed the video, and followed the practical. You may wish to use the Python interpreter in interactive mode to help work out the solutions to some of the questions.


Download and store this document within your own filespace, so the contents can be edited. You will be able to refer to it during the test in Week 6.

Enter your answers directly into the highlighted boxes.

For more information about the module delivery, assessment and feedback please refer to the module within the MyBeckett portal.

as < and >?
Answer:
bool
For each of the following expressions write the result of their evaluation.
100 < 101
Answer:
True
100 > 99
Answer:
True
100 >= 100
Answer:
True
100 != 100
Answer:
False
For each of the following expressions write the result of their evaluation.
"abc" < "xyz"
Answer:
True

What is the data-type of the result when evaluating comparison (relational) expressions such

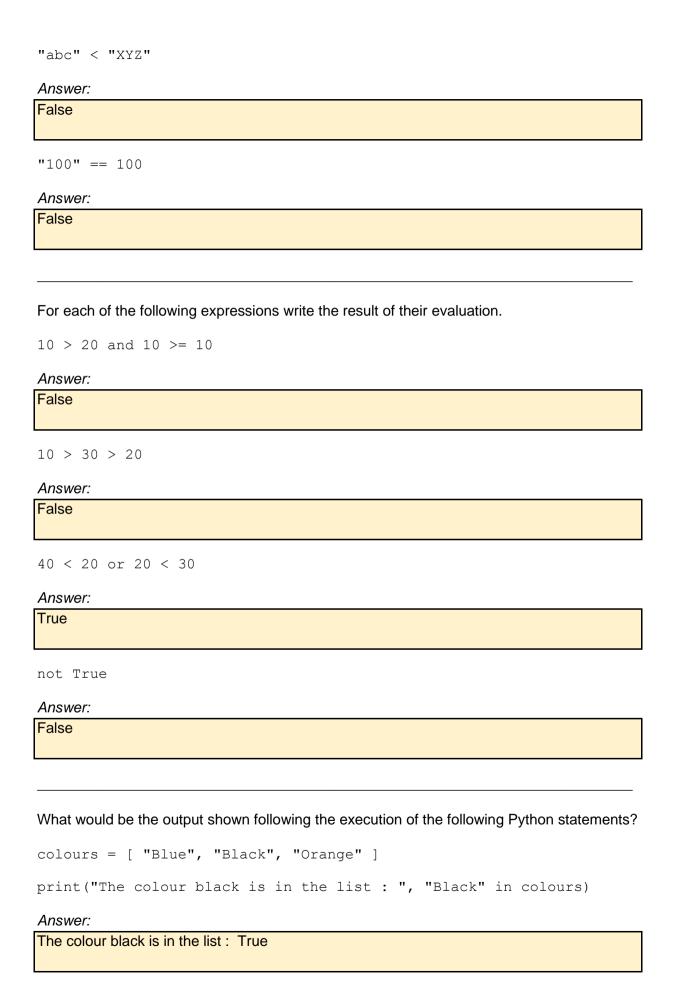

```
print("The colour orange is in the list : ", "orange" in colours)
```

Answer:

```
The colour orange is in the list: False
```

Which of the following concepts does the Python 'if' statement support?

Sequence, Selection or Iteration?

Answer:

```
Selection
```

What would be the output shown following the execution of the following Python statements?

```
num1 = 100
num2 = 10

if num1 % num2 == 0:
    print("num1 is divisible by num2")
else:
    print("num1 is not divisible by num2")
```

Answer:

```
num1 is divisible by num2
```

What would be the output shown following the execution of the following Python statements?

```
num1 = 99
num2 = 70

if num1 < num2:
    print("num1 is less than num2")
elif num1 > num2:
    print("num1 is greater than num2")
else:
    print("num1 is equal to num2")
```

Answer:

```
num1 is greater than num2
```

What is the name given to the following type of Python operator shown below?

```
lowest = x if x < y else y
```

Answer:

```
Ternary Operator
```

And, what value would be assigned to the variable 'lowest' when 'x' was equal to 10 and 'y' was equal to 5?

Answer:

Lowest would be the value of 'y', which is 5.

Within the answer box below write a small Python program, that asks the user to enter a value between 1 and 10.

Once the value has been input display a message saying whether the value was in the requested range.

Remember: values returned from the **input()** function are *strings*, and need converting before being used within expressions, i.e. you will need code such as this -

```
num = input("please enter a number between 1 and 10 : ")
num = int(num)
```

Answer:

```
num = input("Please enter a number between 1 and 10: ")
num = int(num)
if 1 <= num <= 10:
    print("The number is between 1 and 10.")
else:
    print("The number is not between 1 and 10.")
```

Within the answer box below write a small Python program that asks the user to enter two values. Store these in variables called x and y respectively.

If the 'x' value is larger than 'y' then print

```
The value 'x' is larger than the value 'y'

otherwise print

The value 'y' is larger than the value 'x'
```

Answer:

```
x = float(input("Enter the value for x: "))
y = float(input("Enter the value for y: "))

if x > y:
    print(f"The value {x} is larger than the value {y}")
else:
    print(f"The value {y} is larger than the value {x}")
```

Examine the output generated by the above program. Is the displayed text entirely accurate in all cases? If not Why?

Answer:

If you don't type a number, the program might show an error. It's important to enter only numbers for it to work correctly.

Within the answer box below write a small Python program that asks the user to enter two values.

Store these values in two variables then output a message displaying the result of dividing the first value by the second value.

Include code that prevents a run-time error being reported when the user inputs a value of '0' for the second input. *Hint:* use an 'if' statement

If a '0' value is input, print a message saying "division by 0 is not possible".

Answer:

```
a = int(input("Enter the first value: "))
b = int(input("Enter the second value: "))

if b != 0:
    result = a / b
    print(f"The result of {a} divided by {b} is: {result}")

else:
    print("division by 0 is not possible.")
```

Which of the following concepts does the Python while statement support?

Sequence, Selection or Iteration?

Answer:

Iteration

What would be the output shown following the execution of the following Python statements?

```
num = 5
while num > 0:
    print(num)
    num -= 1
```

Answer:

```
5
4
3
2
1
```

Write a small Python program that prints your name to the screen 100 times, then enter the program into the answer box below. Hint: use a 'while' loop.

Answer:

```
count = 0

while count < 100:
    print("Bibash Shrestha")
    count += 1
```

What would be the output shown following the execution of the following Python statements?

```
vals = ["A", "B", "C", "D"]
for letter in vals:
    print(letter)
```

Answer:

```
А
В
С
D
```

What would be the output shown following the execution of each of the following Python statements?

```
for num in range(5):
    print(num)
```

Answer:

```
0
1
2
3
4
```

```
for num in range(10,16):
    print(num)
```

Answer:

```
10
11
12
13
14
15
```

```
for num in range(0,10,-1):
    print(num)
```

Answer:

This code will not produce any output because the `range` function is set with a start value of 0, an end value of 10, and a step of -1. Since the start value is less than the end value and the step is negative, the loop won't execute, resulting in an empty output.

Enter and execute the python code shown below, then show the exact output into the answer box.

```
for x in range(1,10):
    for y in range (1,x):
        print("*")
    print()
```

Answer:

*

What is the term used to refer to code blocks that appear inside other code blocks as in the above program?

Answer:

The term used to refer to code blocks that appear inside other code blocks is "nested code blocks" or "nested structures." In the above program, the `for` loop is the outer code block, and the `print(num)` statement is part of the inner code block.

Exercises are complete

Save this logbook with your answers. Then ask your tutor to check your responses to each question.