3.Automationexercise.com

Step 1: create a maven project on terminal by typing the command **mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp01 -DarchetypeArtifactId=maven-archetype-quickstart -DinteractiveMode=false**

```
shreya@ShreyaM:~$ mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp01 -DarchetypeArtifactId=maven-archetype-quickstart -Dint
eractiveMode=false
[INFO] Scanning for projects...
[INFO]
[INFO] ------------------< org.apache.maven:standalone-pom >-------------------
[INFO] Building Maven Stub Project (No POM) 1
[INFO] --------------------------------[ pom ]---------------------------------
[INFO]
[INFO] >>> maven-archetype-plugin:3.4.1:generate (default-cli) > generate-sources @ standalone-pom >>>
[INFO]
[INFO] <<< maven-archetype-plugin:3.4.1:generate (default-cli) < generate-sources @ standalone-pom <<<
[INFO]
[INFO]
[INFO] --- maven-archetype-plugin:3.4.1:generate (default-cli) @ standalone-pom ---
[INFO] Generating project in Batch mode
[INFO] No archetype defined. Using maven-archetype-quickstart (org.apache.maven.archetypes:maven-archetype-quickstart:1.0)
[INFO] ----------------------------------------------------------------------------
[INFO] Using following parameters for creating project from Old (1.x) Archetype: maven-archetype-quickstart:1.0
[INFO] ----------------------------------------------------------------------------
[INFO] Parameter: basedir, Value: /home/shreya
[INFO] Parameter: package, Value: com.example
[INFO] Parameter: groupId, Value: com.example
[INFO] Parameter: artifactId, Value: MyMavenSeleniumApp01
[INFO] Parameter: packageName, Value: com.example
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] project created from Old (1.x) Archetype in dir: /home/shreya/MyMavenSeleniumApp01
[INFO] ------------------------------------------------------------------------
[INFO] BUILD SUCCESS
[INFO] ------------------------------------------------------------------------
[INFO] Total time:  32.878 s
[INFO] Finished at: 2026-03-17T22:37:01+05:30
[INFO] ------------------------------------------------------------------------
```

Step 2 : edit the pom.xml file and add the dependencies

The pom.xml has the code

```
<project xmlns="http://maven.apache.org/POM/4.0.0"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
   xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/maven-v4_0_0.xsd">

   <modelVersion>4.0.0</modelVersion>
   <groupId>com.example</groupId>
   <artifactId>MyMavenExerciseAutomationApp</artifactId>
   <packaging>jar</packaging>
   <version>1.0-SNAPSHOT</version>
   <name>MyMavenExerciseAutomationApp</name>
   <url>http://maven.apache.org</url>

   <dependencies>
      <dependency>
         <groupId>junit</groupId>
         <artifactId>junit</artifactId>
         <version>3.8.1</version>
         <scope>test</scope>
      </dependency>

      <!-- https://mvnrepository.com/artifact/org.seleniumhq.selenium/selenium-java -->
      <dependency>
         <groupId>org.seleniumhq.selenium</groupId>
```

```
        <artifactId>selenium-java</artifactId>
        <version>4.29.0</version>
    </dependency>

    <dependency>
        <groupId>io.github.bonigarcia</groupId>
        <artifactId>webdrivermanager</artifactId>
        <version>5.8.0</version>
    </dependency>
  </dependencies>
<!-- Build: Configuring plugins and build settings -->
<build>
<plugins>
<!-- Example: Maven Compiler Plugin to compile Java code -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-compiler-plugin</artifactId>
<version>3.8.1</version>
<configuration>
<source>1.7</source>
<target>1.7</target>
</configuration>
</plugin>
<!-- Example: Maven Surefire Plugin to run tests -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-surefire-plugin</artifactId>
<version>2.22.2</version>
</plugin>
<plugin>
        <groupId>org.apache.maven.plugins</groupId>

        <artifactId>maven-jar-plugin</artifactId>
        <version>3.0.1</version>
       <configuration>
          <archive>
             <manifestEntries>
                <Main-Class>com.example.App</Main-Class>
             </manifestEntries>
          </archive>
        </configuration>
    </plugin>
</plugins>
</build>
</project>
```

Step 3: Edit the App.java

```
package com.example;

import org.openqa.selenium.By;
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.chrome.ChromeDriver;

public class App {

    public static void main(String[] args) throws InterruptedException {

        WebDriver driver = new ChromeDriver();

        // Open website
        driver.get("https://automationexercise.com/");
        driver.manage().window().maximize();

        // Wait for page to load
        Thread.sleep(5000);

        // Close advertisement popup if it appears
        try {
            driver.findElement(By.cssSelector(".grippy-host")).click();
        } catch (Exception e) {
            System.out.println("Ad popup not found");
        }

        Thread.sleep(3000);

        // Click first product "Add to cart" (Blue Top ₹500)
        driver.findElement(By.xpath("(//a[contains(text(),'Add to cart')])[1]")).click();

        Thread.sleep(5000);

        // Close cart popup by clicking Continue Shopping
        driver.findElement(By.xpath("//button[contains(text(),'Continue Shopping')]")).click();

        System.out.println("Blue Top added to cart");

        // Browser stays open (NO driver.quit())

    }
}
```

Step 4:build and run the maven application

To execute type the command **mvn exec:java -Dexec.mainClass="com.example.App"**

it opens automationexercise.com and automatically adds a product to cart

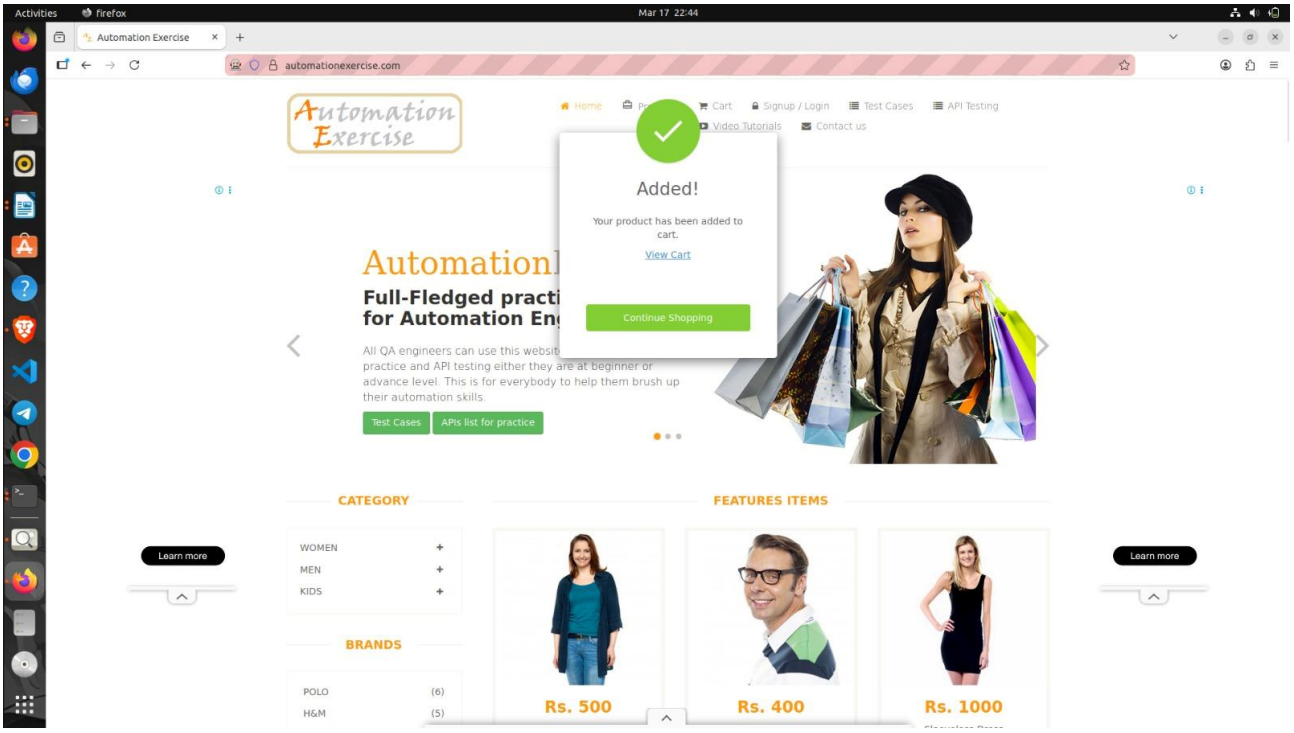

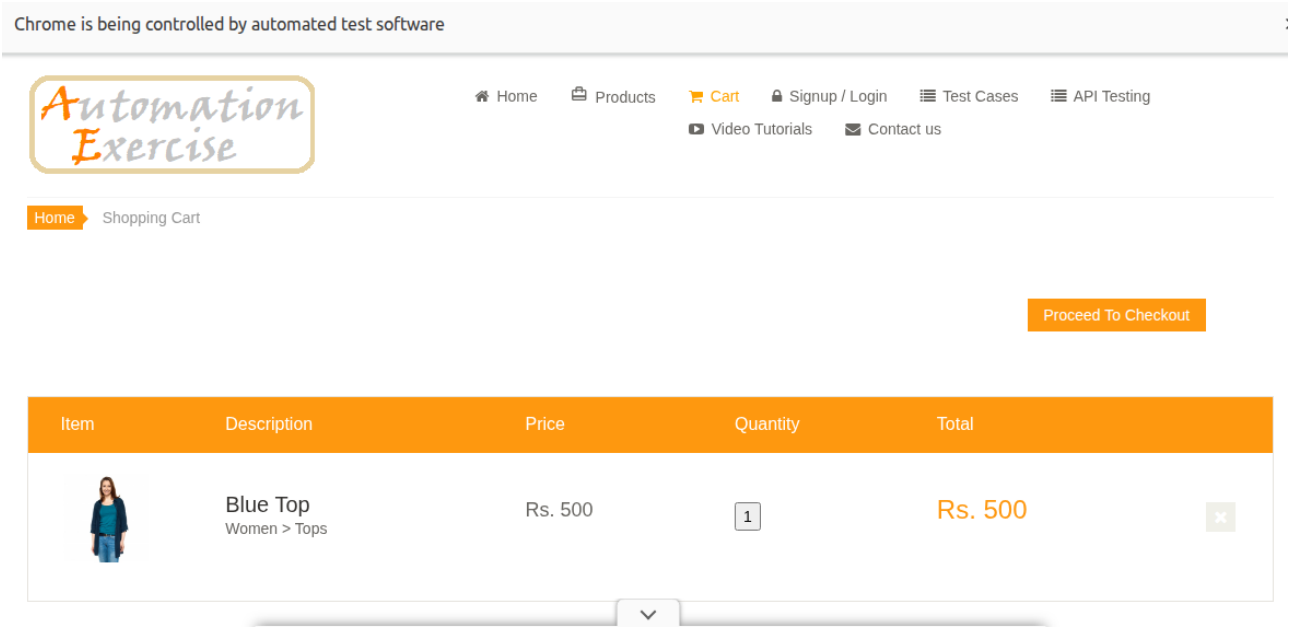

AutomationExercise in jenkins:

Step 1: in the terminal type the code AutomationExercise to enter the folder .
Type the command gedit JenkinsFile to open the Jenkinsfile and paste the code

```
pipeline {
    agent any

    tools {
        maven 'Maven'
    }

    stages {
        stage('Checkout') {
            steps {
                git branch: 'master', url: 'https://github.com/shreya20m/automationexercise.git'
            }
        }

        stage('Build') {
            steps {
                sh 'mvn clean package -DskipTests'
            }
        }

        stage('Run Application') {
            steps {
                sh 'java -jar target/automationexercise -1.0-SNAPSHOT.jar'
            }
        }
    }

    post {
        success {
            echo 'Build and deployment successful!'
        }
        failure {
```

```
            echo 'Build failed!'
        }
    }
}
```

Step 2: in Jenkins Dasboard click on New Item
Give the name AutomationExercise and select Pipeline

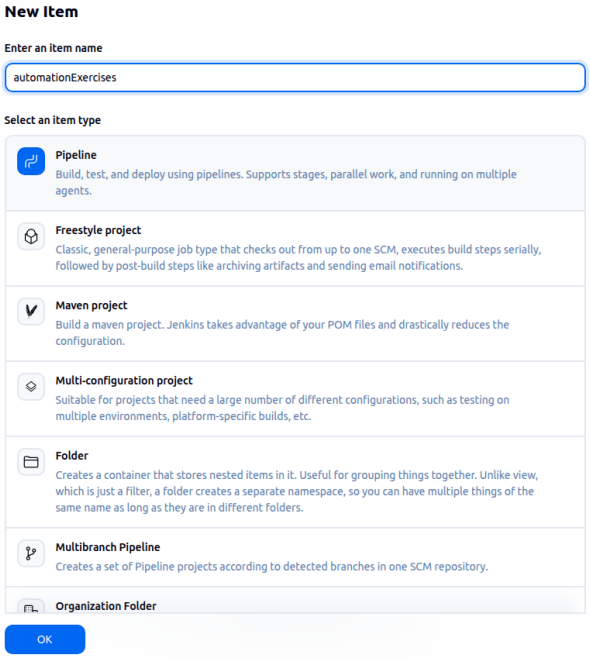

In configure scroll down to Pipeline and choose pipeline script from SCM,give the repository url and choose GitHub Credential

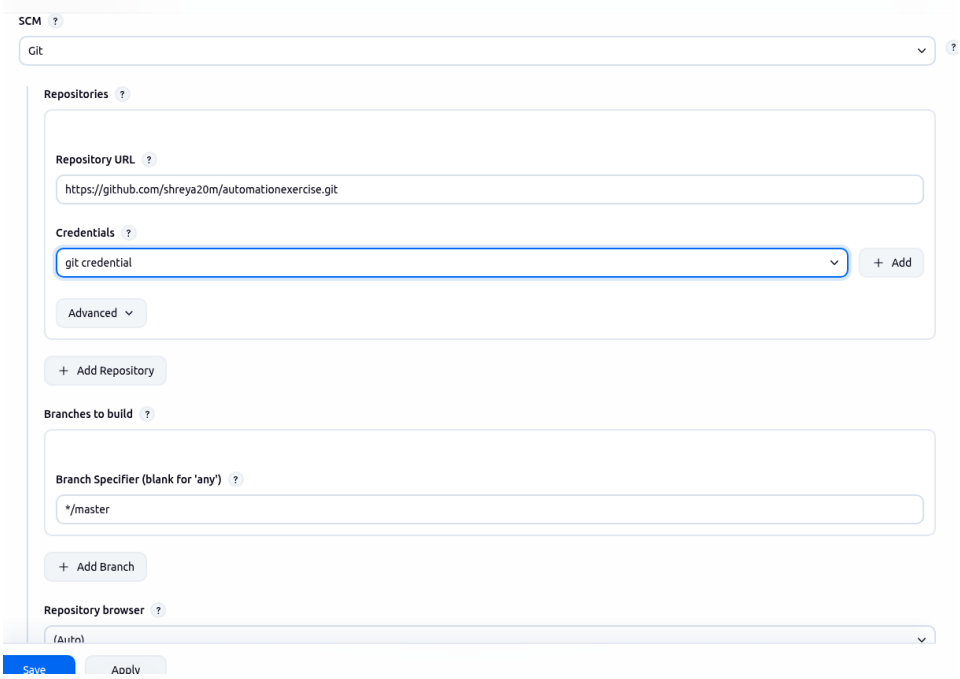

Then click on apply and save

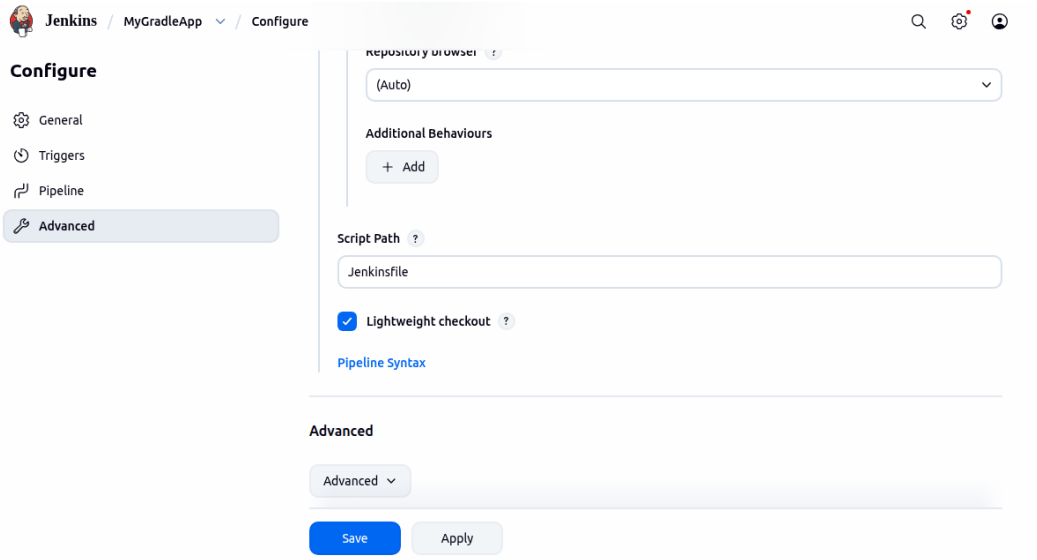
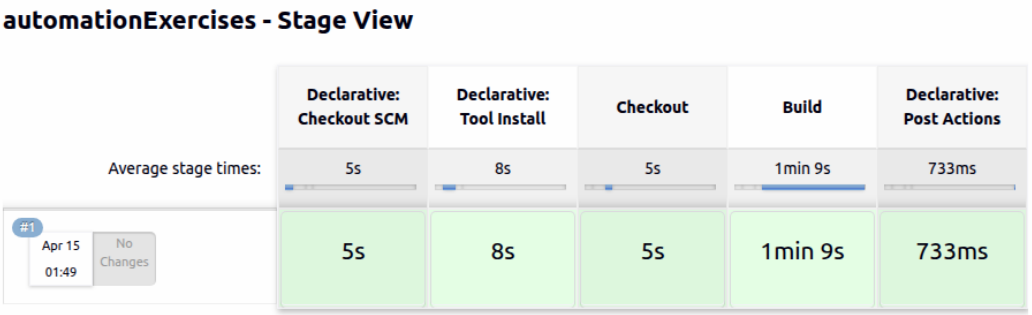
Step 3: go to Jenkins Dasboard select the PractiseTest pipeline and select Build Now. After build select Full Stage View. Once the errors are corrected Build again