2. Practiceautomation.com

Step 1: create a maven project on terminal by typing the command **mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp01 -DarchetypeArtifactiId=maven-archetype-quickstart -DinteractiveMode=false**

```
shreya@ShreyaM:~$ mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp01 -DarchetypeArtifactiId=maven-archetype-quickstart -Dint
eractiveMode=false
[INFO] Scanning for projects...
[INFO]
[INFO] ------------------< org.apache.maven:standalone-pom >-------------------
[INFO] Building Maven Stub Project (No POM) 1
[INFO] --------------------------------[ pom ]---------------------------------
[INFO]
[INFO] >>> maven-archetype-plugin:3.4.1:generate (default-cli) > generate-sources @ standalone-pom >>>
[INFO]
[INFO] <<< maven-archetype-plugin:3.4.1:generate (default-cli) < generate-sources @ standalone-pom <<<
[INFO]
[INFO]
[INFO] --- maven-archetype-plugin:3.4.1:generate (default-cli) @ standalone-pom ---
[INFO] Generating project in Batch mode
[INFO] No archetype defined. Using maven-archetype-quickstart (org.apache.maven.archetypes:maven-archetype-quickstart:1.0)
[INFO] ----------------------------------------------------------------------------
[INFO] Using following parameters for creating project from Old (1.x) Archetype: maven-archetype-quickstart:1.0
[INFO] ----------------------------------------------------------------------------
[INFO] Parameter: basedir, Value: /home/shreya
[INFO] Parameter: package, Value: com.example
[INFO] Parameter: groupId, Value: com.example
[INFO] Parameter: artifactId, Value: MyMavenSeleniumApp01
[INFO] Parameter: packageName, Value: com.example
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] project created from Old (1.x) Archetype in dir: /home/shreya/MyMavenSeleniumApp01
[INFO] ------------------------------------------------------------------------
[INFO] BUILD SUCCESS
[INFO] ------------------------------------------------------------------------
[INFO] Total time:  32.878 s
[INFO] Finished at: 2026-03-17T22:37:01+05:30
[INFO] ------------------------------------------------------------------------
```

Step 2 : edit the pom.xml file and add the dependencies

The pom.xml has the code:

```
<project xmlns="http://maven.apache.org/POM/4.0.0"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/maven-
v4_0_0.xsd">
  <modelVersion>4.0.0</modelVersion>
  <groupId>com.example</groupId>
  <artifactId>MyMavenSeleniumApp01</artifactId>
  <packaging>jar</packagi<ng>
  <version>1.0-SNAPSHOT</version>
  <name>MyMavenSeleniumApp01</name>
  <url>http://maven.apache.org</url>
  <dependencies>
    <dependency>
      <groupId>junit</groupId>
      <artifactId>junit</artifactId>
      <version>3.8.1</version>
      <scope>test</scope>
    </dependency>
  <!-- https://mvnrepository.com/artifact/org.seleniumhq.selenium/selenium-java -->
<dependency>
    <groupId>org.seleniumhq.selenium</groupId>
    <artifactId>selenium-java</artifactId>
    <version>4.29.0</version>
</dependency>
  </dependencies>
```

```
  <!-- Build: Configuring plugins and build settings -->
<build>
<plugins>
<!-- Example: Maven Compiler Plugin to compile Java code -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-compiler-plugin</artifactId>
<version>3.8.1</version>
<configuration>
<source>1.7</source>
<target>1.7</target>
</configuration>
</plugin>
<!-- Example: Maven Surefire Plugin to run tests -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-surefire-plugin</artifactId>
<version>2.22.2</version>
</plugin>
<plugin>
        <groupId>org.apache.maven.plugins</groupId>

        <artifactId>maven-jar-plugin</artifactId>
        <version>3.0.1</version>
       <configuration>
           <archive>
              <manifestEntries>
                 <Main-Class>com.example.App</Main-Class>
              </manifestEntries>
           </archive>
        </configuration>

     </plugin>

</plugins>
</build>
</project>
```

Step 3: Edit the App.java

```
package com.example;
import org.openqa.selenium.By;
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.chrome.ChromeDriver;

public class App {
```

```
    public static void main(String[] args) throws InterruptedException {
        WebDriver driver = new ChromeDriver();
        // Open the website
        driver.get("https://practicetestautomation.com/practice-test-login/");
        Thread.sleep(2000); // 2 second delay
        // Enter username
        driver.findElement(By.id("username")).sendKeys("student");
        Thread.sleep(2000); // delay
        // Enter password
        driver.findElement(By.id("password")).sendKeys("Password123");
        Thread.sleep(2000); // delay
        // Click submit
        driver.findElement(By.id("submit")).click();
        Thread.sleep(3000); // wait after login
    }
}
```

Step 4: build and run the maven application

To execute type the command **mvn exec:java -Dexec.mainClass="com.example.App"**
it openspracticeautomation.com and we can login using the credentials

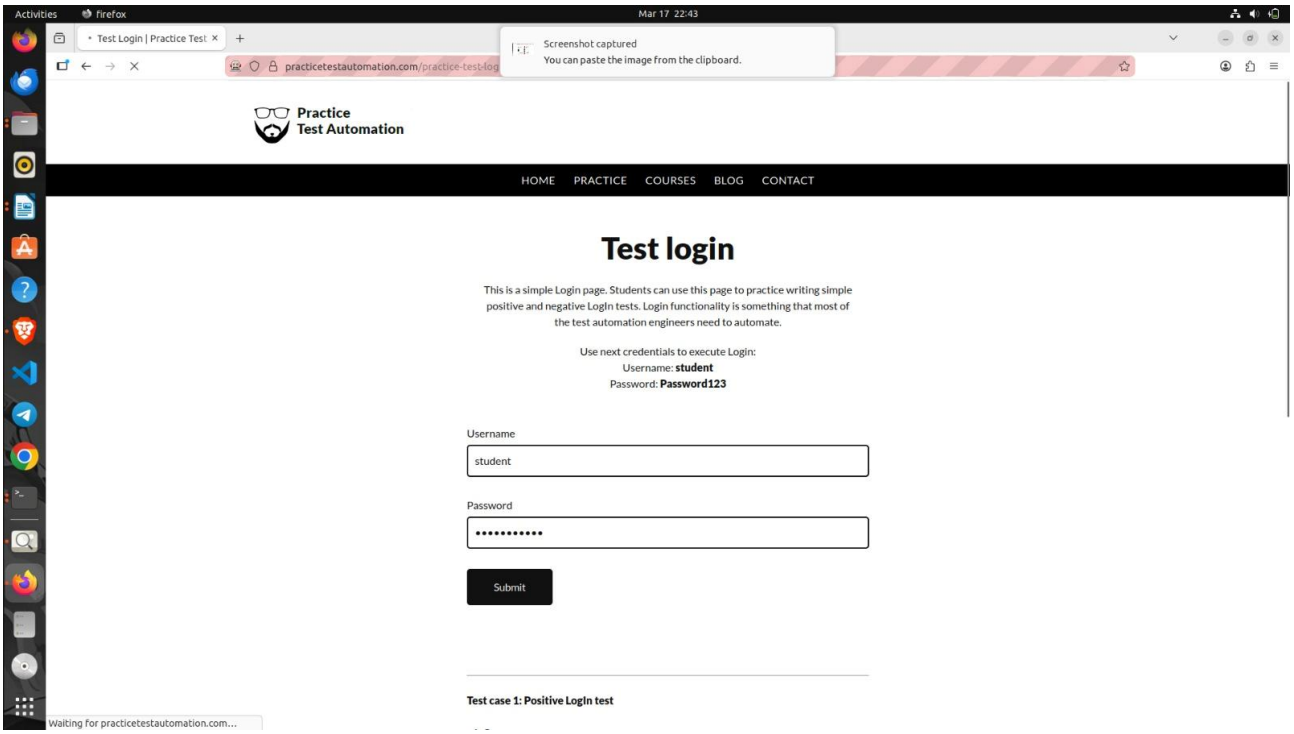

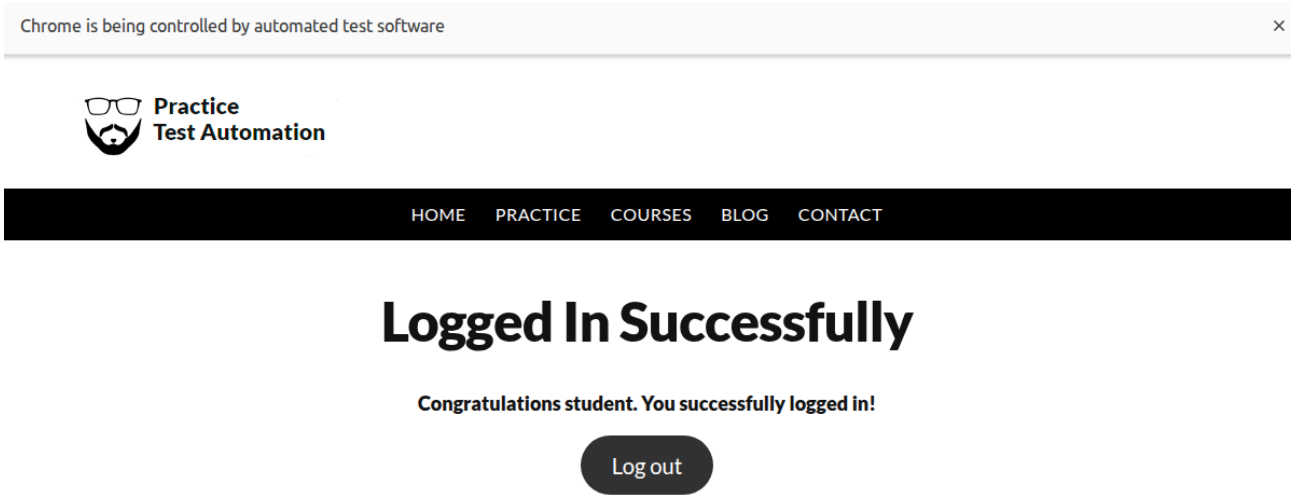

PracticeTest in jenkins:

Step 1: in the terminal type the code practicetest to enter the folder .

Type the command gedit JenkinsFile to open the Jenkinsfile and paste the code

```
pipeline {
   agent any

   tools {
      maven 'Maven'
   }

   stages {
      stage('Checkout') {
         steps {
            git branch: 'master', url: 'https://github.com/shreya20m/practicetest.git'
         }
      }

      stage('Build') {
         steps {
            sh 'mvn clean package -DskipTests'
         }
      }

      stage('Run Application') {
         steps {
            sh 'java -jar target/practisetest-1.0-SNAPSHOT.jar'
         }
      }
```

```
    }

    post {
        success {
            echo 'Build and deployment successful!'
        }
        failure {
            echo 'Build failed!'
        }
    }
}
```

Step 2: in Jenkins Dasboard click on New Item
Give the name practisetest and select Pipeline

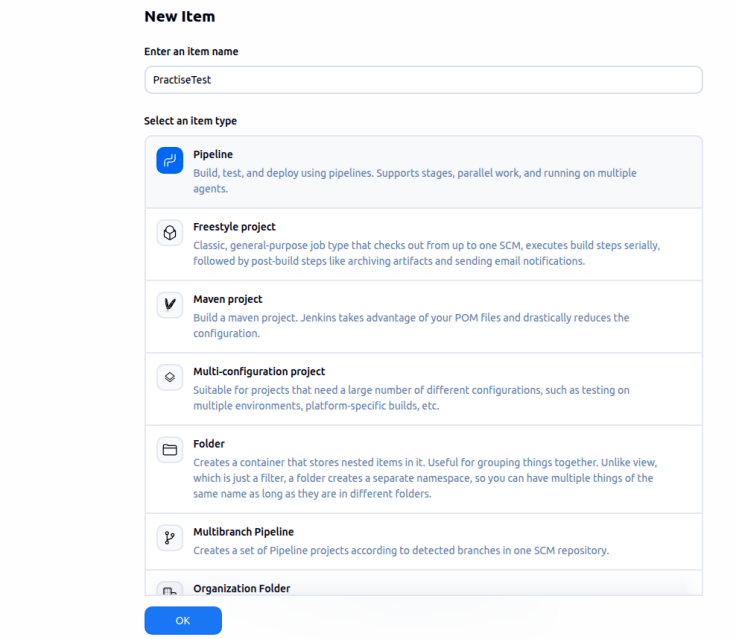

In configure scroll down to Pipeline and choose pipeline script from SCM,give the repository url and choose GitHub Credential

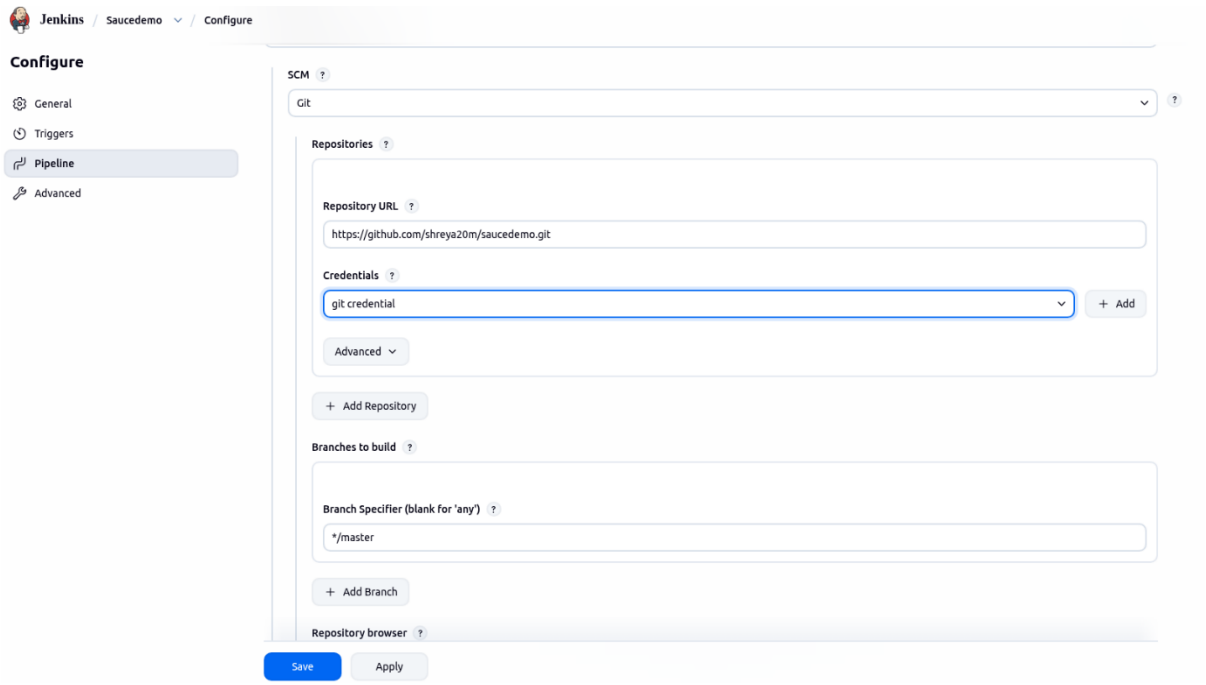

Then click on apply and save

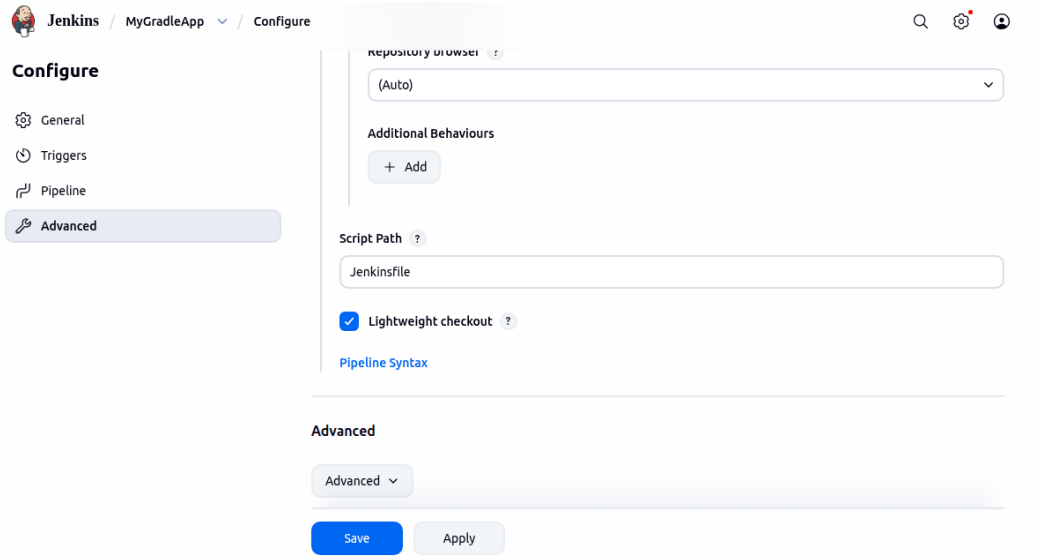

Step 3: go to Jenkins Dasboard select the PractiseTest pipeline and select Build Now. After build select Full Stage View. Once the errors are corrected Build again

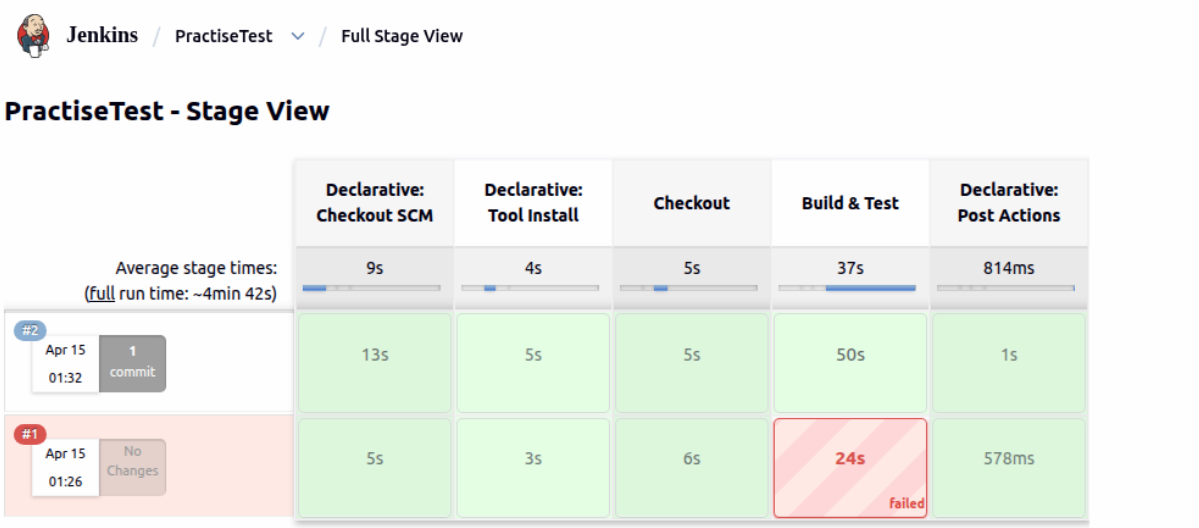
Jenkins / PractiseTest / Full Stage View
PractiseTest - Stage View
Declarative: Checkout SCM
Declarative: Tool Install
Checkout
Build & Test
Declarative: Post Actions
Average stage times:
(full run time: ~4min 42s)
9s
4s
5s
37s
814ms
#2
Apr 15
01:32
1 commit
13s
5s
5s
50s
1s
#1
Apr 15
01:26
No Changes
5s
3s
6s
24s
failed
578ms