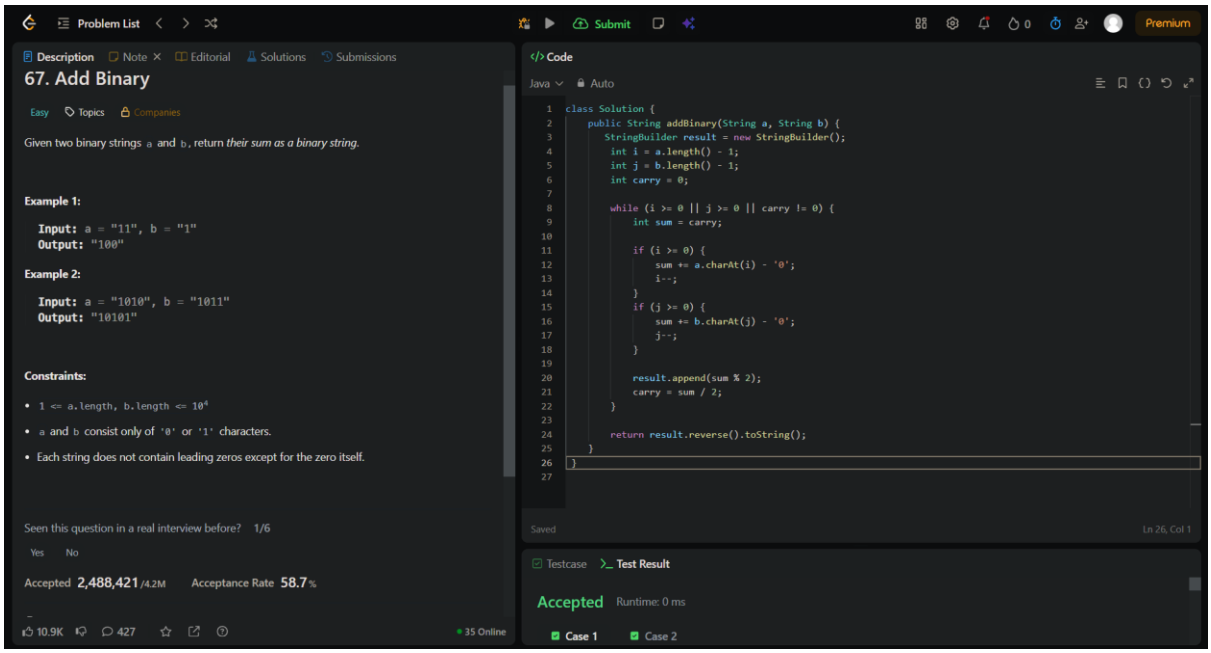
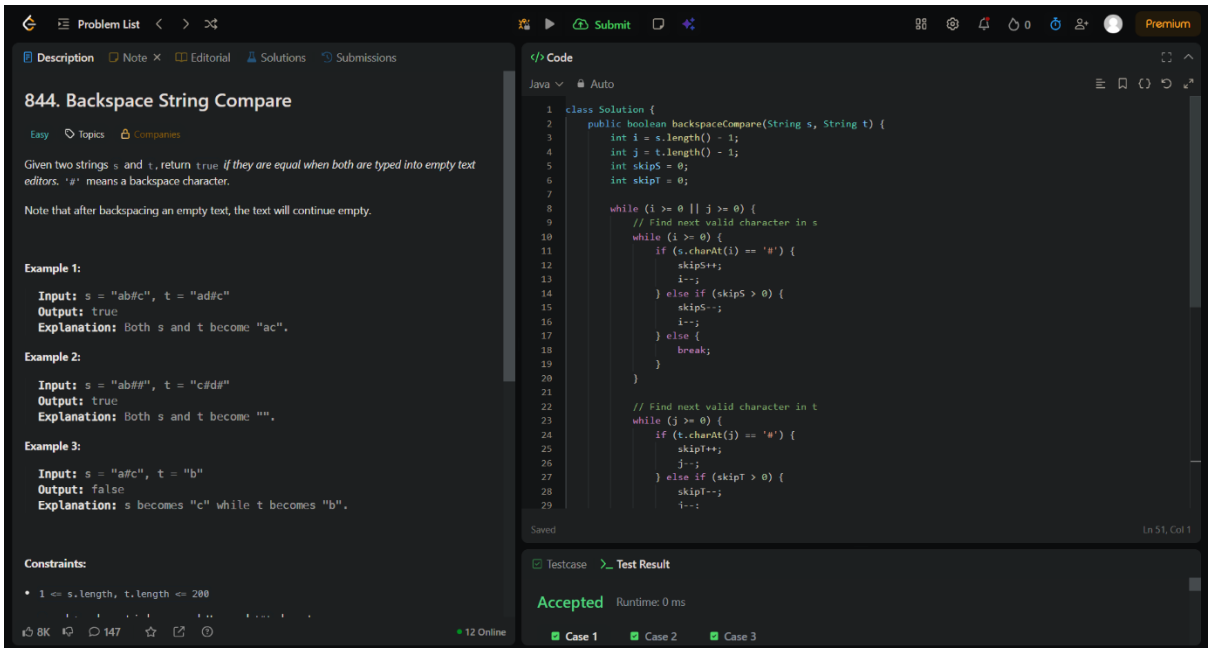
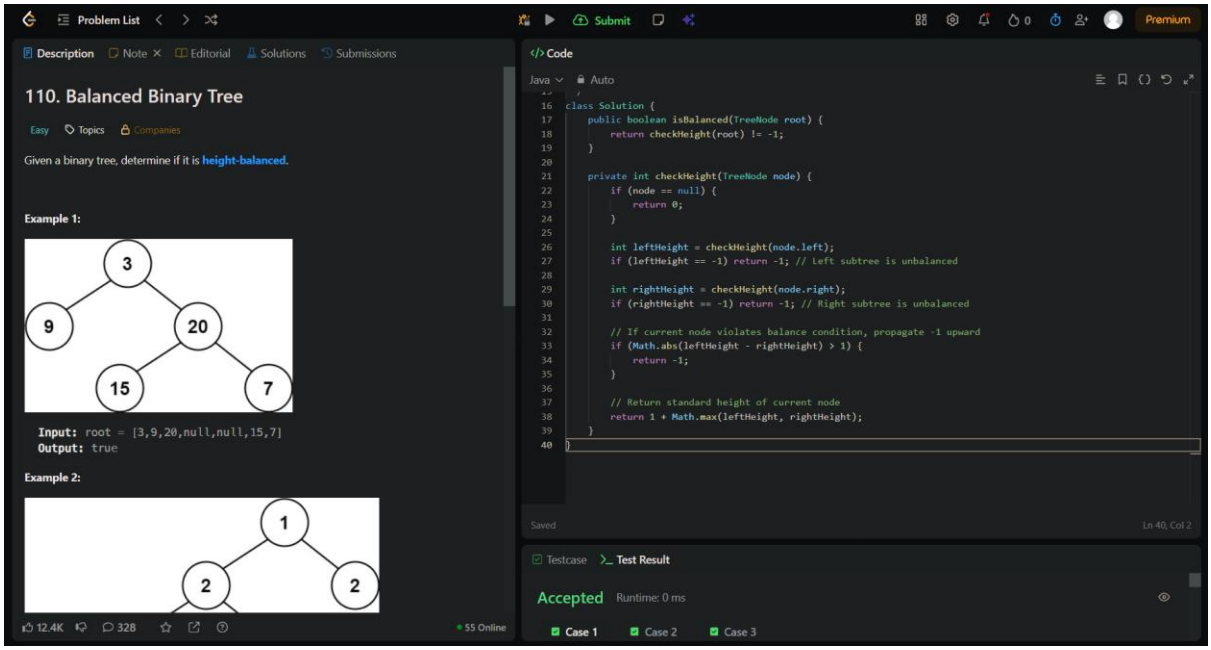
1.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
67. Add Binary
Easy
Topics
Companies
Given two binary strings a and b, return their sum as a binary string.
Example 1:
Input: a = "11", b = "1"
Output: "100"
Example 2:
Input: a = "1010", b = "1011"
Output: "10101"
Constraints:
1 <= a.length, b.length <= 10^4
a and b consist only of '0' or '1' characters.
Each string does not contain leading zeros except for the zero itself.
Seen this question in a real interview before? 1/6
Yes
No
Accepted 2,488,421/4.2M
Acceptance Rate 58.7%
10.9K
427
35 Online
Code
Java
Auto
class Solution {
public String addBinary(String a, String b) {
StringBuilder result = new StringBuilder();
int i = a.length() - 1;
int j = b.length() - 1;
int carry = 0;
while (i >= 0 || j >= 0 || carry != 0) {
int sum = carry;
if (i >= 0) {
sum += a.charAt(i) - '0';
i--;
}
if (j >= 0) {
sum += b.charAt(j) - '0';
j--;
}
result.append(sum % 2);
carry = sum / 2;
}
return result.reverse().toString();
}
}
Saved
Ln 26, Col 1
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2

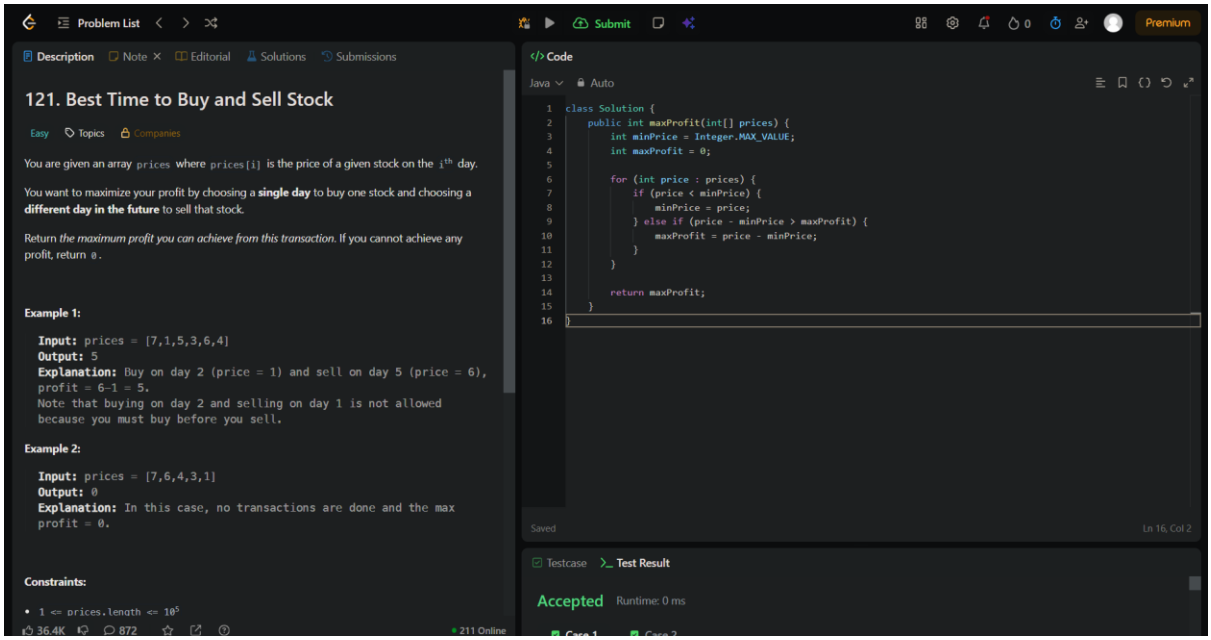
2.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
844. Backspace String Compare
Easy
Topics
Companies
Given two strings s and t, return true if they are equal when both are typed into empty text editors. '#' means a backspace character.
Note that after backspacing an empty text, the text will continue empty.
Example 1:
Input: s = "ab#c", t = "ad#c"
Output: true
Explanation: Both s and t become "ac".
Example 2:
Input: s = "ab##", t = "c#d#"
Output: true
Explanation: Both s and t become "".
Example 3:
Input: s = "a#c", t = "b"
Output: false
Explanation: s becomes "c" while t becomes "b".
Constraints:
1 <= s.length, t.length <= 200
8K
147
12 Online
Code
Java
Auto
class Solution {
public boolean backspaceCompare(String s, String t) {
int i = s.length() - 1;
int j = t.length() - 1;
int skipS = 0;
int skipT = 0;
while (i >= 0 || j >= 0) {
// Find next valid character in s
while (i >= 0) {
if (s.charAt(i) == '#') {
skipS++;
i--;
} else if (skipS > 0) {
skipS--;
i--;
} else {
break;
}
}
// Find next valid character in t
while (j >= 0) {
if (t.charAt(j) == '#') {
skipT++;
j--;
} else if (skipT > 0) {
skipT--;
i--;
Saved
Ln 51, Col 1
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3

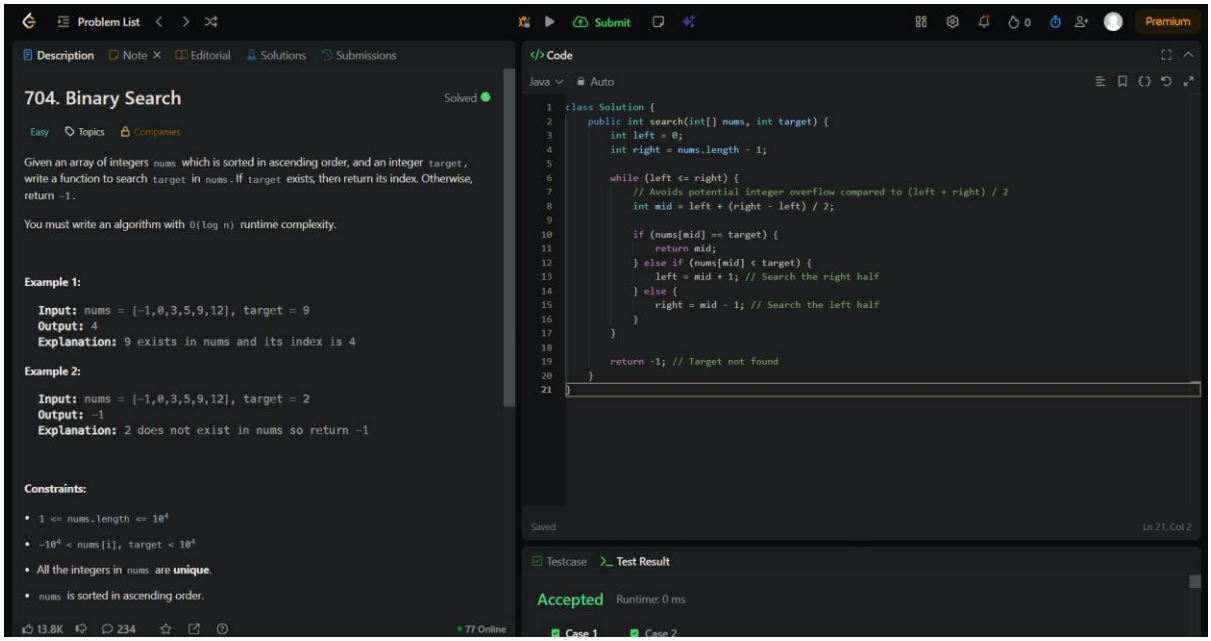
3.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
110. Balanced Binary Tree
Easy
Topics
Companies
Given a binary tree, determine if it is height-balanced.
Example 1:
3
9
20
15
7
Input: root = [3,9,20,null,null,15,7]
Output: true
Example 2:
1
2
2
12.4K
328
55 Online
Code
Java
Auto
class Solution {
public boolean isBalanced(TreeNode root) {
return checkHeight(root) != -1;
}
private int checkHeight(TreeNode node) {
if (node == null) {
return 0;
}
int leftHeight = checkHeight(node.left);
if (leftHeight == -1) return -1; // Left subtree is unbalanced
int rightHeight = checkHeight(node.right);
if (rightHeight == -1) return -1; // Right subtree is unbalanced
// If current node violates balance condition, propagate -1 upward
if (Math.abs(leftHeight - rightHeight) > 1) {
return -1;
}
// Return standard height of current node
return 1 + Math.max(leftHeight, rightHeight);
}
}
Saved
Ln 40, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3

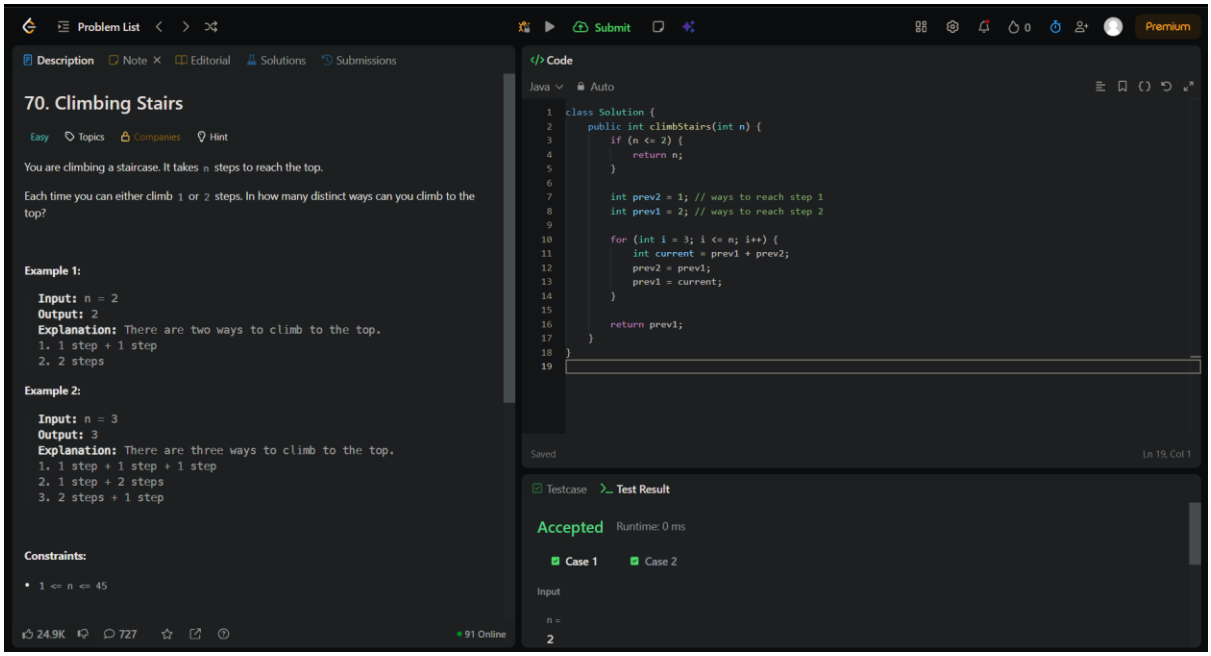
4.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
121. Best Time to Buy and Sell Stock
Easy
Topics
Companies
You are given an array prices where prices[i] is the price of a given stock on the ith day.
You want to maximize your profit by choosing a single day to buy one stock and choosing a different day in the future to sell that stock.
Return the maximum profit you can achieve from this transaction. If you cannot achieve any profit, return 0.
Example 1:
Input: prices = [7,1,5,3,6,4]
Output: 5
Explanation: Buy on day 2 (price = 1) and sell on day 5 (price = 6), profit = 6-1 = 5.
Note that buying on day 2 and selling on day 1 is not allowed because you must buy before you sell.
Example 2:
Input: prices = [7,6,4,3,1]
Output: 0
Explanation: In this case, no transactions are done and the max profit = 0.
Constraints:
1 <= prices.length <= 10^5
36.4K
872
211 Online
Code
Java
Auto
class Solution {
public int maxProfit(int[] prices) {
int minPrice = Integer.MAX_VALUE;
int maxProfit = 0;
for (int price : prices) {
if (price < minPrice) {
minPrice = price;
} else if (price - minPrice > maxProfit) {
maxProfit = price - minPrice;
}
}
return maxProfit;
}
}
Saved
Ln 16, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms

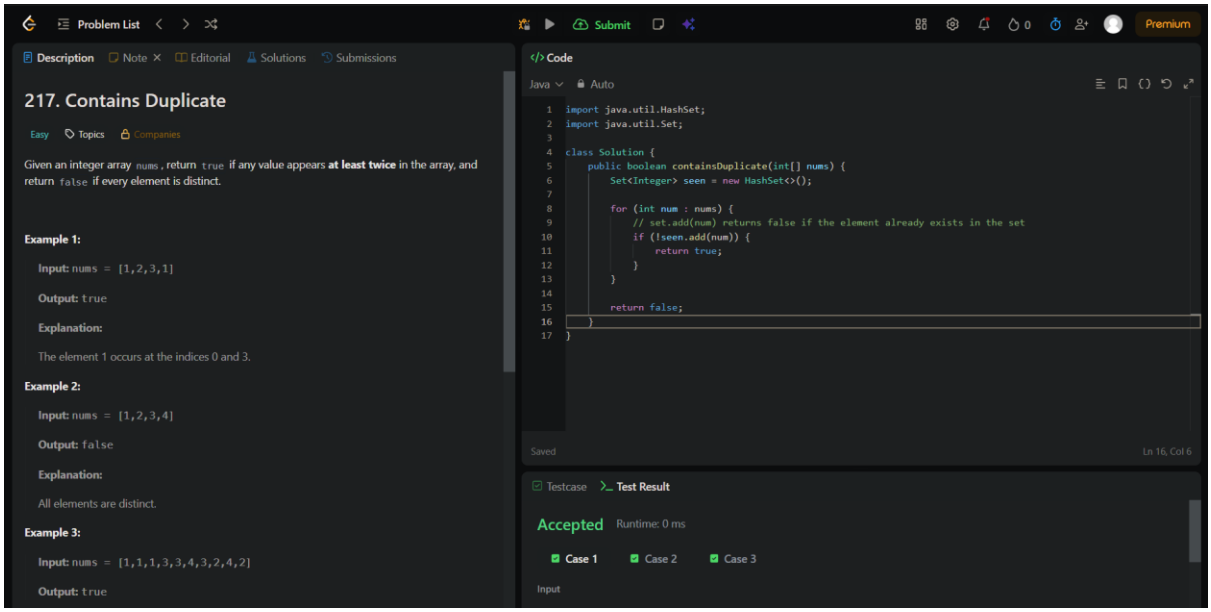
5.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
704. Binary Search
Solved
Easy
Topics
Companies
Given an array of integers nums which is sorted in ascending order, and an integer target, write a function to search target in nums. If target exists, then return its index. Otherwise, return -1.
You must write an algorithm with O(log n) runtime complexity.
Example 1:
Input: nums = [-1,0,3,5,9,12], target = 9
Output: 4
Explanation: 9 exists in nums and its index is 4
Example 2:
Input: nums = [-1,0,3,5,9,12], target = 2
Output: -1
Explanation: 2 does not exist in nums so return -1
Constraints:
1 <= nums.length <= 10^4
-10^4 < nums[i], target < 10^4
All the integers in nums are unique.
nums is sorted in ascending order.
13.8K
234
77 Online
Code
Java
Auto
class Solution {
public int search(int[] nums, int target) {
int left = 0;
int right = nums.length - 1;
while (left <= right) {
// Avoids potential integer overflow compared to (left + right) / 2
int mid = left + (right - left) / 2;
if (nums[mid] == target) {
return mid;
} else if (nums[mid] < target) {
left = mid + 1; // Search the right half
} else {
right = mid - 1; // Search the left half
}
}
return -1; // Target not found
}
}
Saved
Ln 21, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2

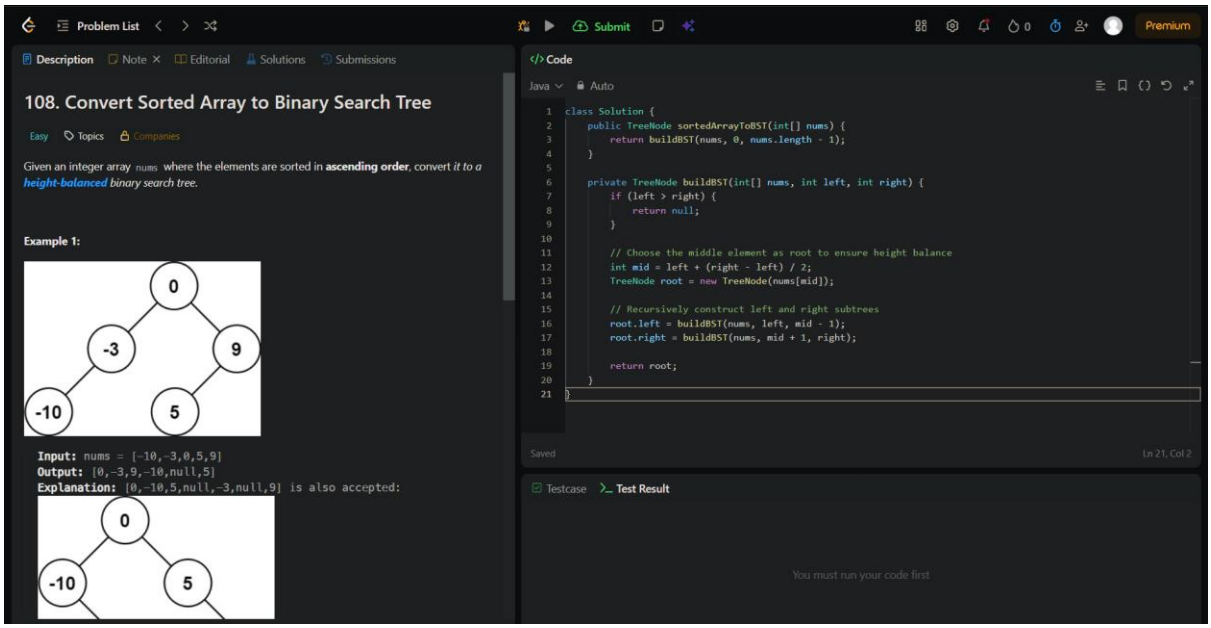
6.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
70. Climbing Stairs
Easy
Topics
Companies
Hint
You are climbing a staircase. It takes n steps to reach the top.
Each time you can either climb 1 or 2 steps. In how many distinct ways can you climb to the top?
Example 1:
Input: n = 2
Output: 2
Explanation: There are two ways to climb to the top.
1. 1 step + 1 step
2. 2 steps
Example 2:
Input: n = 3
Output: 3
Explanation: There are three ways to climb to the top.
1. 1 step + 1 step + 1 step
2. 1 step + 2 steps
3. 2 steps + 1 step
Constraints:
1 <= n <= 45
24.9K
727
91 Online
Code
Java
Auto
class Solution {
public int climbStairs(int n) {
if (n <= 2) {
return n;
}
int prev2 = 1; // ways to reach step 1
int prev1 = 2; // ways to reach step 2
for (int i = 3; i <= n; i++) {
int current = prev1 + prev2;
prev2 = prev1;
prev1 = current;
}
return prev1;
}
}
Saved
Ln 19, Col 1
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
n =
2

7.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
217. Contains Duplicate
Easy
Topics
Companies
Given an integer array nums, return true if any value appears at least twice in the array, and return false if every element is distinct.
Example 1:
Input: nums = [1,2,3,1]
Output: true
Explanation:
The element 1 occurs at the indices 0 and 3.
Example 2:
Input: nums = [1,2,3,4]
Output: false
Explanation:
All elements are distinct.
Example 3:
Input: nums = [1,1,1,3,3,4,3,2,4,2]
Output: true
Code
Java
Auto
import java.util.HashSet;
import java.util.Set;
class Solution {
public boolean containsDuplicate(int[] nums) {
Set<Integer> seen = new HashSet<>();
for (int num : nums) {
// set.add(num) returns false if the element already exists in the set
if (!seen.add(num)) {
return true;
}
}
return false;
}
}
Saved
Ln 16, Col 6
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input

8.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
108. Convert Sorted Array to Binary Search Tree
Easy
Topics
Companies
Given an integer array nums where the elements are sorted in ascending order, convert it to a height-balanced binary search tree.
Example 1:
0
-3
9
-10
5
Input: nums = [-10,-3,0,5,9]
Output: [0,-3,9,-10,null,5]
Explanation: [0,-10,5,null,-3,null,9] is also accepted:
0
-10
5
Code
Java
Auto
class Solution {
public TreeNode sortedArrayToBST(int[] nums) {
return buildBST(nums, 0, nums.length - 1);
}
private TreeNode buildBST(int[] nums, int left, int right) {
if (left > right) {
return null;
}
// Choose the middle element as root to ensure height balance
int mid = left + (right - left) / 2;
TreeNode root = new TreeNode(nums[mid]);
// Recursively construct left and right subtrees
root.left = buildBST(nums, left, mid - 1);
root.right = buildBST(nums, mid + 1, right);
return root;
}
}
Saved
Ln 21, Col 2
Testcase
Test Result
You must run your code first

9.

Problem List

Submit

Premium

Description | Note | Editorial | Solutions | Submissions

338. Counting Bits

Easy | Topics | Companies | Hint

Given an integer `n`, return *an array* `ans` *of length* `n + 1` *such that for each* `i` (`0 <= i <= n`), `ans[i]` *is the* ***number of*** `1`***'s*** *in the binary representation of* `i`.

Do not solve it with built-in functions (i.e., like `__builtin_popcount` in C++).

Example 1:

```
Input: n = 2
Output: [0,1,1]
Explanation:
0 --> 0
1 --> 1
2 --> 10
```

Example 2:

```
Input: n = 5
Output: [0,1,1,2,1,2]
Explanation:
0 --> 0
1 --> 1
2 --> 10
3 --> 11
4 --> 100
5 --> 101
```

Constraints:

Code

Java | Auto

```java
class Solution {
    public int[] countBits(int n) {
        int[] ans = new int[n + 1];

        for (int i = 1; i <= n; i++) {
            // ans[i >> 1] gets the set bit count of i / 2
            // (i & 1) adds 1 if the lowest bit is set (i is odd)
            ans[i] = ans[i >> 1] + (i & 1);
        }

        return ans;
    }
}
```

Saved | Ln 13, Col 2

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2

Input

10.

Problem List

Submit

Premium

Description | Note | Editorial | Solutions | Submissions

543. Diameter of Binary Tree


Easy | Topics | Companies

Given the `root` of a binary tree, return *the length of the* ***diameter*** *of the tree.*

The **diameter** of a binary tree is the **length** of the longest path between any two nodes in a tree. This path may or may not pass through the `root`.

The **length** of a path between two nodes is represented by the number of edges between them.

Example 1:




```
Input: root = [1,2,3,4,5]
Output: 3
Explanation: 3 is the length of the path [4,2,1,3] or [5,2,1,3].
```

16K | 512 | 57 Online

Code

Java | Auto

```java
class Solution {
    private int maxDiameter = 0;

    public int diameterOfBinaryTree(TreeNode root) {
        maxDiameter = 0;
        getDepth(root);
        return maxDiameter;
    }

    private int getDepth(TreeNode node) {
        if (node == null) {
            return 0;
        }

        int leftDepth = getDepth(node.left);
        int rightDepth = getDepth(node.right);

        // The longest path passing through this node is leftDepth + rightDepth
        maxDiameter = Math.max(maxDiameter, leftDepth + rightDepth);

        // Return the height of the subtree rooted at this node
        return 1 + Math.max(leftDepth, rightDepth);
    }
}
```

Saved | Ln 24, Col 2

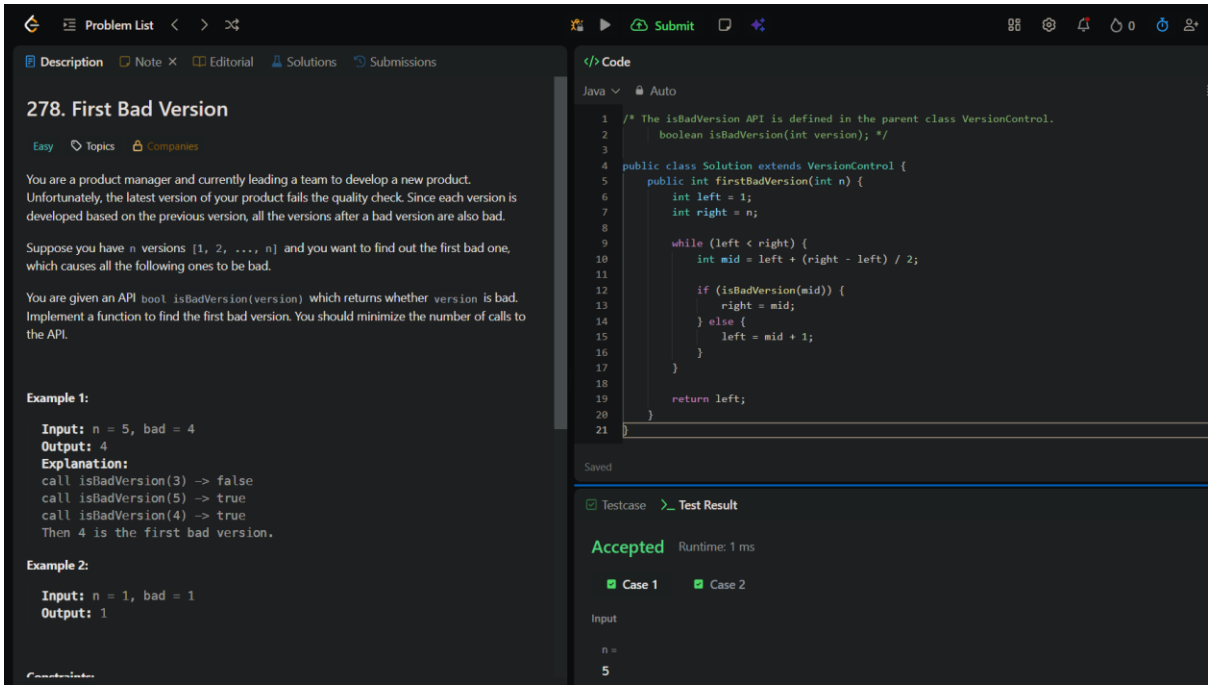
Testcase | Test Result

Accepted Runtime: 0 ms

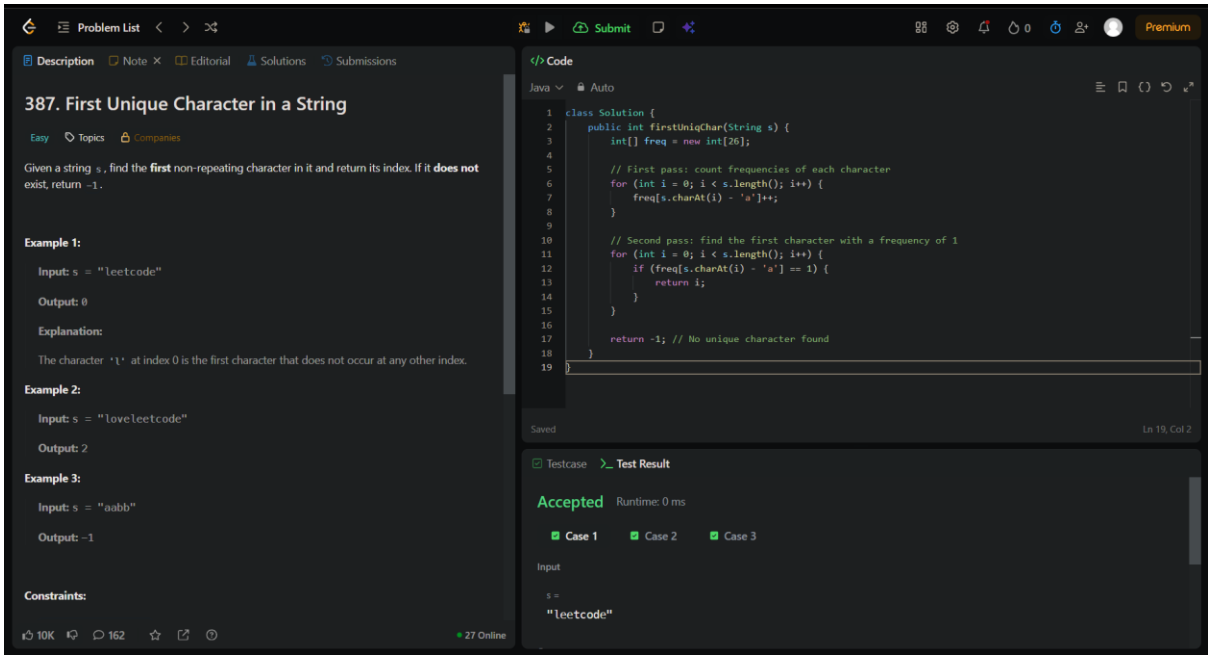
Case 1 | Case 2

Input

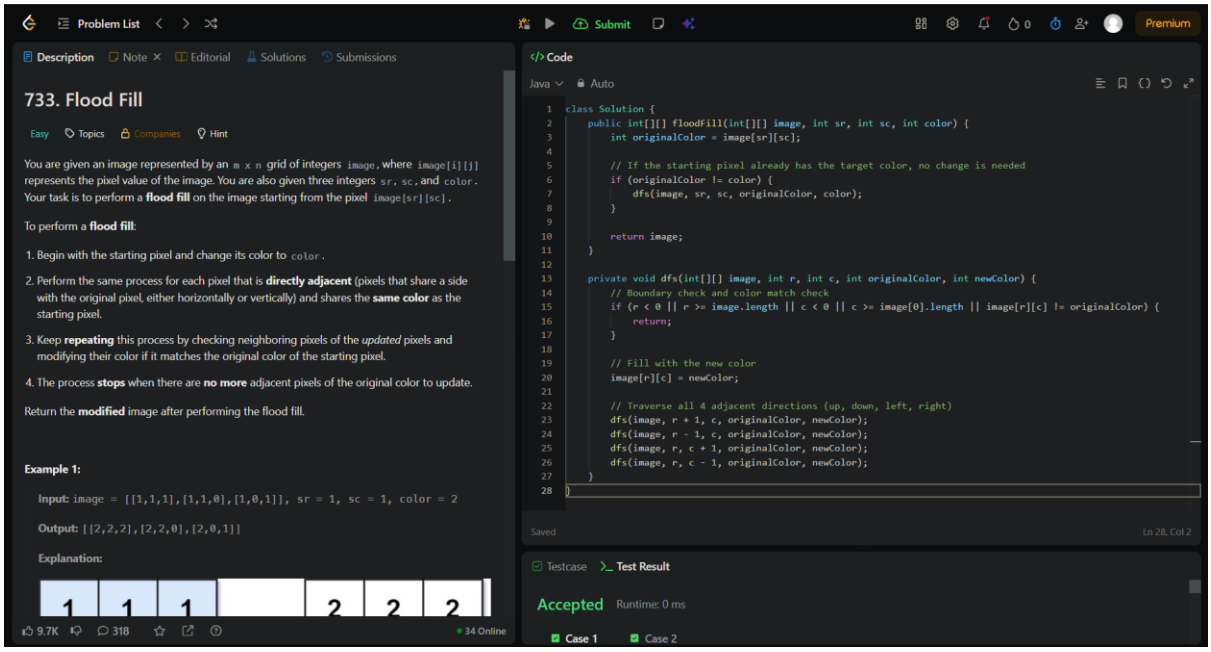
11.


Problem List
Submit
Description
Note
Editorial
Solutions
Submissions
278. First Bad Version
Easy
Topics
Companies
You are a product manager and currently leading a team to develop a new product. Unfortunately, the latest version of your product fails the quality check. Since each version is developed based on the previous version, all the versions after a bad version are also bad.
Suppose you have n versions [1, 2, ..., n] and you want to find out the first bad one, which causes all the following ones to be bad.
You are given an API bool isBadVersion(version) which returns whether version is bad. Implement a function to find the first bad version. You should minimize the number of calls to the API.
Example 1:
Input: n = 5, bad = 4
Output: 4
Explanation:
call isBadVersion(3) -> false
call isBadVersion(5) -> true
call isBadVersion(4) -> true
Then 4 is the first bad version.
Example 2:
Input: n = 1, bad = 1
Output: 1
Code
Java
Auto
/* The isBadVersion API is defined in the parent class VersionControl.
boolean isBadVersion(int version); */
public class Solution extends VersionControl {
public int firstBadVersion(int n) {
int left = 1;
int right = n;
while (left < right) {
int mid = left + (right - left) / 2;
if (isBadVersion(mid)) {
right = mid;
} else {
left = mid + 1;
}
}
return left;
}
}
Saved
Testcase
Test Result
Accepted
Runtime: 1 ms
Case 1
Case 2
Input
n =
5

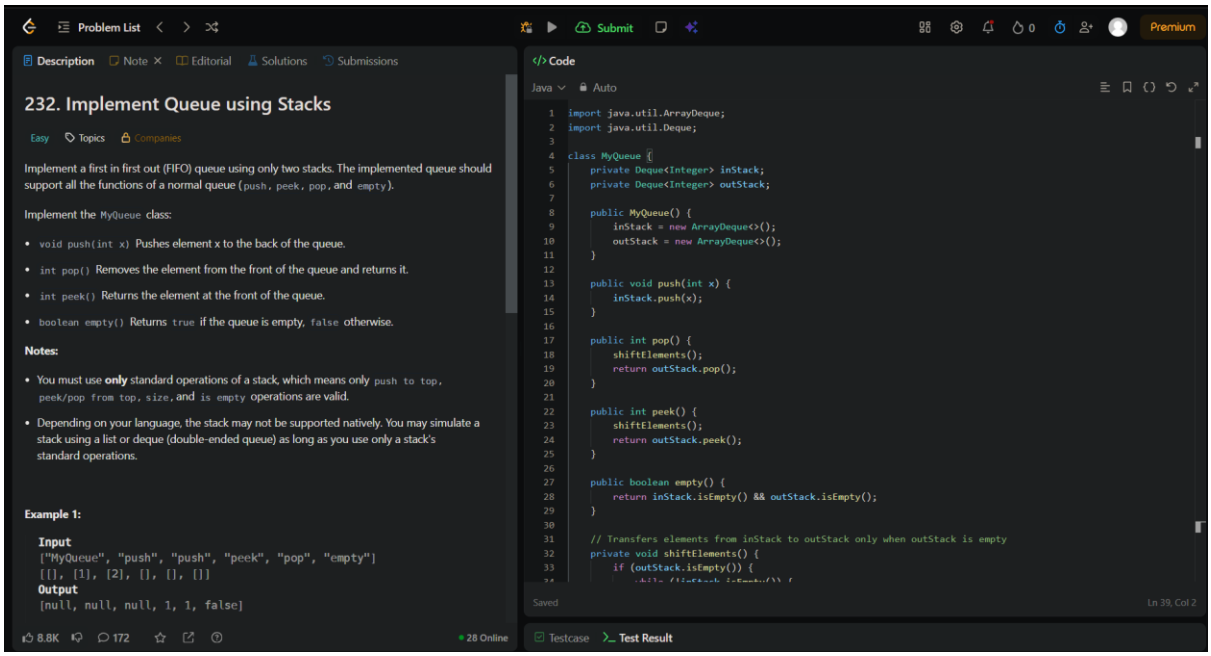
12.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
387. First Unique Character in a String
Easy
Topics
Companies
Given a string s, find the first non-repeating character in it and return its index. If it does not exist, return -1.
Example 1:
Input: s = "leetcode"
Output: 0
Explanation:
The character 'l' at index 0 is the first character that does not occur at any other index.
Example 2:
Input: s = "loveleetcode"
Output: 2
Example 3:
Input: s = "aabb"
Output: -1
Constraints:
10K
162
27 Online
Code
Java
Auto
class Solution {
public int firstUniqChar(String s) {
int[] freq = new int[26];
// First pass: count frequencies of each character
for (int i = 0; i < s.length(); i++) {
freq[s.charAt(i) - 'a']++;
}
// Second pass: find the first character with a frequency of 1
for (int i = 0; i < s.length(); i++) {
if (freq[s.charAt(i) - 'a'] == 1) {
return i;
}
}
return -1; // No unique character found
}
}
Saved
Ln 19, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
s =
"leetcode"

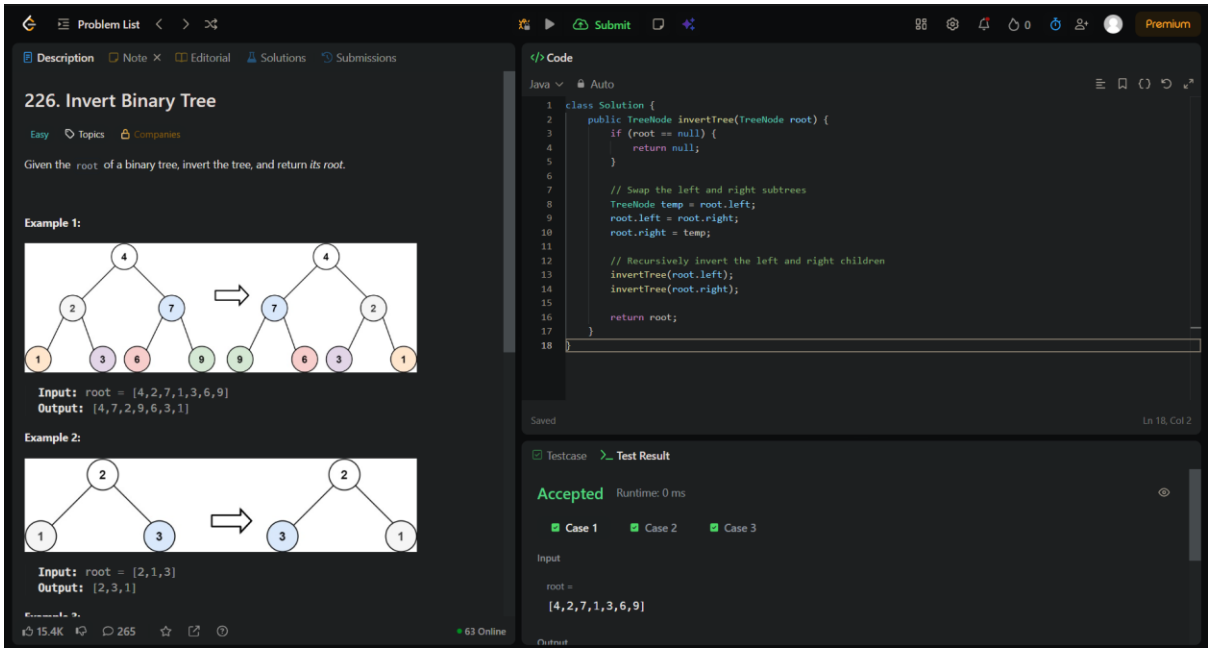
13.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
733. Flood Fill
Easy
Topics
Companies
Hint
You are given an image represented by an m x n grid of integers image, where image[i][j] represents the pixel value of the image. You are also given three integers sr, sc, and color. Your task is to perform a flood fill on the image starting from the pixel image[sr][sc].
To perform a flood fill:
1. Begin with the starting pixel and change its color to color.
2. Perform the same process for each pixel that is directly adjacent (pixels that share a side with the original pixel, either horizontally or vertically) and shares the same color as the starting pixel.
3. Keep repeating this process by checking neighboring pixels of the updated pixels and modifying their color if it matches the original color of the starting pixel.
4. The process stops when there are no more adjacent pixels of the original color to update.
Return the modified image after performing the flood fill.
Example 1:
Input: image = [[1,1,1],[1,1,0],[1,0,1]], sr = 1, sc = 1, color = 2
Output: [[2,2,2],[2,2,0],[2,0,1]]
Explanation:
1 1 1 2 2 2
9.7K
318
34 Online
Code
Java
Auto
class Solution {
public int[][] floodFill(int[][] image, int sr, int sc, int color) {
int originalColor = image[sr][sc];
// If the starting pixel already has the target color, no change is needed
if (originalColor != color) {
dfs(image, sr, sc, originalColor, color);
}
return image;
}
private void dfs(int[][] image, int r, int c, int originalColor, int newColor) {
// Boundary check and color match check
if (r < 0 || r >= image.length || c < 0 || c >= image[0].length || image[r][c] != originalColor) {
return;
}
// Fill with the new color
image[r][c] = newColor;
// Traverse all 4 adjacent directions (up, down, left, right)
dfs(image, r + 1, c, originalColor, newColor);
dfs(image, r - 1, c, originalColor, newColor);
dfs(image, r, c + 1, originalColor, newColor);
dfs(image, r, c - 1, originalColor, newColor);
}
}
Saved
Ln 28, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2

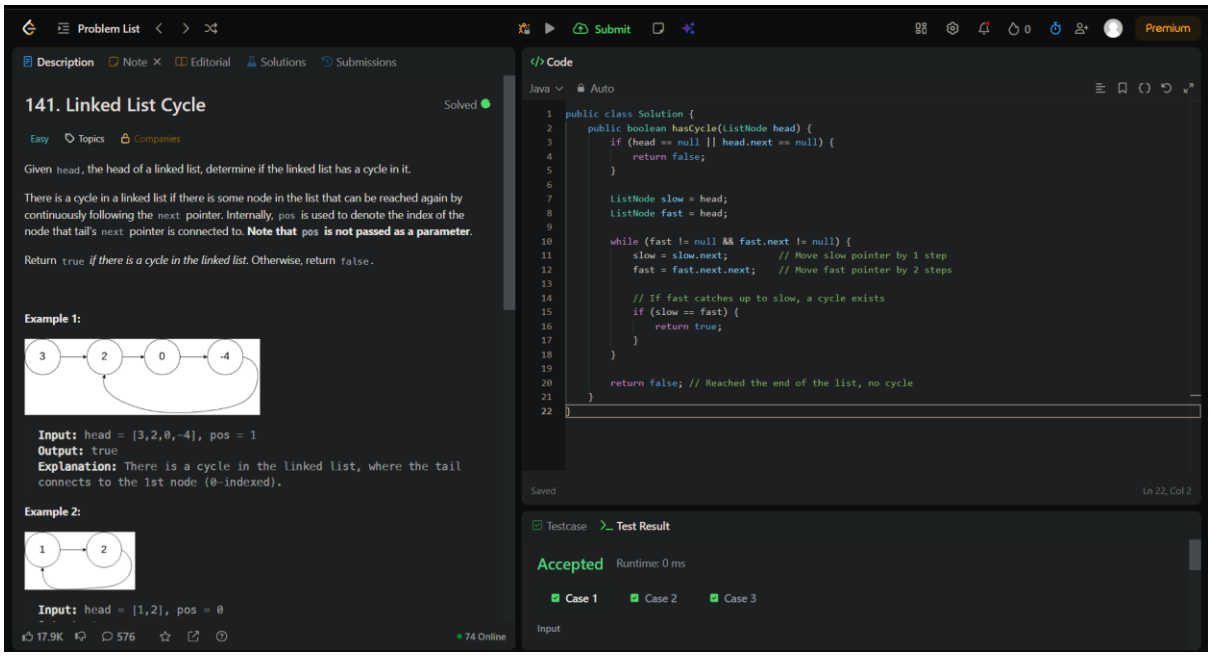
14.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
232. Implement Queue using Stacks
Easy
Topics
Companies
Implement a first in first out (FIFO) queue using only two stacks. The implemented queue should support all the functions of a normal queue (push, peek, pop, and empty).
Implement the MyQueue class:
void push(int x) Pushes element x to the back of the queue.
int pop() Removes the element from the front of the queue and returns it.
int peek() Returns the element at the front of the queue.
boolean empty() Returns true if the queue is empty, false otherwise.
Notes:
You must use only standard operations of a stack, which means only push to top, peek/pop from top, size, and is empty operations are valid.
Depending on your language, the stack may not be supported natively. You may simulate a stack using a list or deque (double-ended queue) as long as you use only a stack's standard operations.
Example 1:
Input
["MyQueue", "push", "push", "peek", "pop", "empty"]
[[], [1], [2], [], [], []]
Output
[null, null, null, 1, 1, false]
8.8K
172
28 Online
Code
Java
Auto
import java.util.ArrayDeque;
import java.util.Deque;
class MyQueue {
private Deque<Integer> inStack;
private Deque<Integer> outStack;
public MyQueue() {
inStack = new ArrayDeque<>();
outStack = new ArrayDeque<>();
}
public void push(int x) {
inStack.push(x);
}
public int pop() {
shiftElements();
return outStack.pop();
}
public int peek() {
shiftElements();
return outStack.peek();
}
public boolean empty() {
return inStack.isEmpty() && outStack.isEmpty();
}
// Transfers elements from inStack to outStack only when outStack is empty
private void shiftElements() {
if (outStack.isEmpty()) {
Saved
Ln 39, Col 2
Testcase
Test Result

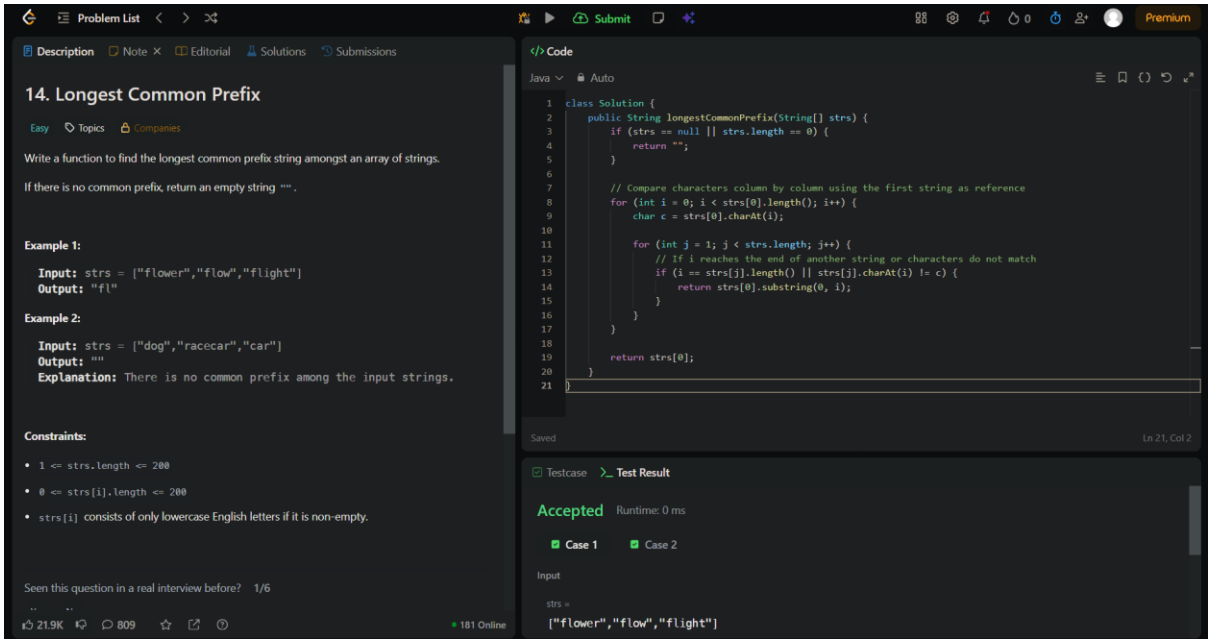
15.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
226. Invert Binary Tree
Easy
Topics
Companies
Given the root of a binary tree, invert the tree, and return its root.
Example 1:
Input: root = [4,2,7,1,3,6,9]
Output: [4,7,2,9,6,3,1]
Example 2:
Input: root = [2,1,3]
Output: [2,3,1]
15.4K
265
63 Online
Code
Java
Auto
class Solution {
public TreeNode invertTree(TreeNode root) {
if (root == null) {
return null;
}
// Swap the left and right subtrees
TreeNode temp = root.left;
root.left = root.right;
root.right = temp;
// Recursively invert the left and right children
invertTree(root.left);
invertTree(root.right);
return root;
}
}
Saved
Ln 18, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
root =
[4,2,7,1,3,6,9]

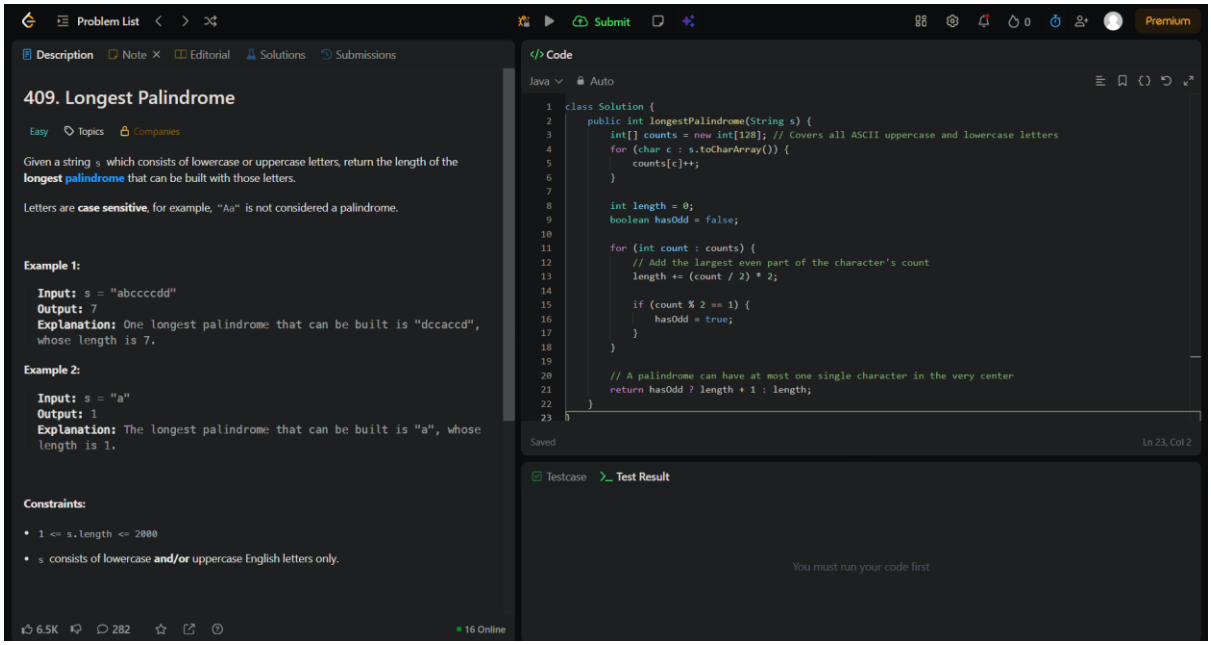
16.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
141. Linked List Cycle
Solved
Easy
Topics
Companies
Given head, the head of a linked list, determine if the linked list has a cycle in it.
There is a cycle in a linked list if there is some node in the list that can be reached again by continuously following the next pointer. Internally, pos is used to denote the index of the node that tail's next pointer is connected to. Note that pos is not passed as a parameter.
Return true if there is a cycle in the linked list. Otherwise, return false.
Example 1:
Input: head = [3,2,0,-4], pos = 1
Output: true
Explanation: There is a cycle in the linked list, where the tail connects to the 1st node (0-indexed).
Example 2:
Input: head = [1,2], pos = 0
17.9K
576
74 Online
Code
Java
Auto
public class Solution {
public boolean hasCycle(ListNode head) {
if (head == null || head.next == null) {
return false;
}
ListNode slow = head;
ListNode fast = head;
while (fast != null && fast.next != null) {
slow = slow.next; // Move slow pointer by 1 step
fast = fast.next.next; // Move fast pointer by 2 steps
// If fast catches up to slow, a cycle exists
if (slow == fast) {
return true;
}
}
return false; // Reached the end of the list, no cycle
}
}
Saved
Ln 22, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input

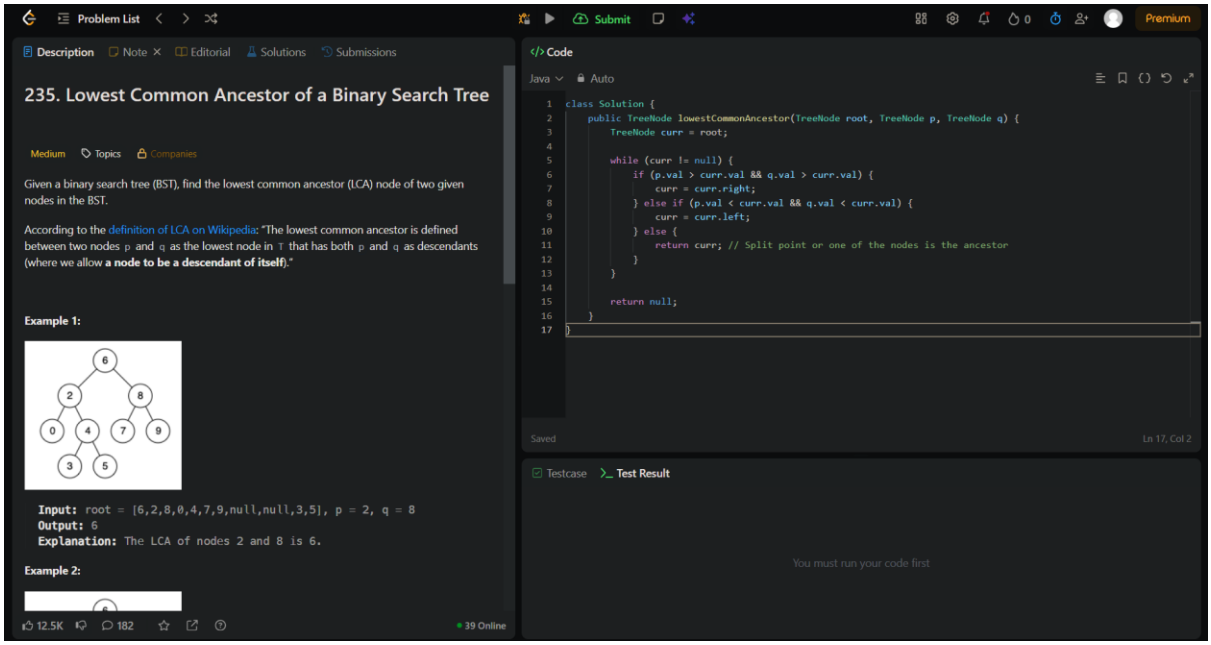
17.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
14. Longest Common Prefix
Easy
Topics
Companies
Write a function to find the longest common prefix string amongst an array of strings.
If there is no common prefix, return an empty string "".
Example 1:
Input: strs = ["flower","flow","flight"]
Output: "fl"
Example 2:
Input: strs = ["dog","racecar","car"]
Output: ""
Explanation: There is no common prefix among the input strings.
Constraints:
1 <= strs.length <= 200
0 <= strs[i].length <= 200
strs[i] consists of only lowercase English letters if it is non-empty.
Seen this question in a real interview before? 1/6
21.9K
809
181 Online
Code
Java
Auto
class Solution {
public String longestCommonPrefix(String[] strs) {
if (strs == null || strs.length == 0) {
return "";
}
// Compare characters column by column using the first string as reference
for (int i = 0; i < strs[0].length(); i++) {
char c = strs[0].charAt(i);
for (int j = 1; j < strs.length; j++) {
// If i reaches the end of another string or characters do not match
if (i == strs[j].length() || strs[j].charAt(i) != c) {
return strs[0].substring(0, i);
}
}
}
return strs[0];
}
}
Saved
Ln 21, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
strs =
["flower","flow","flight"]

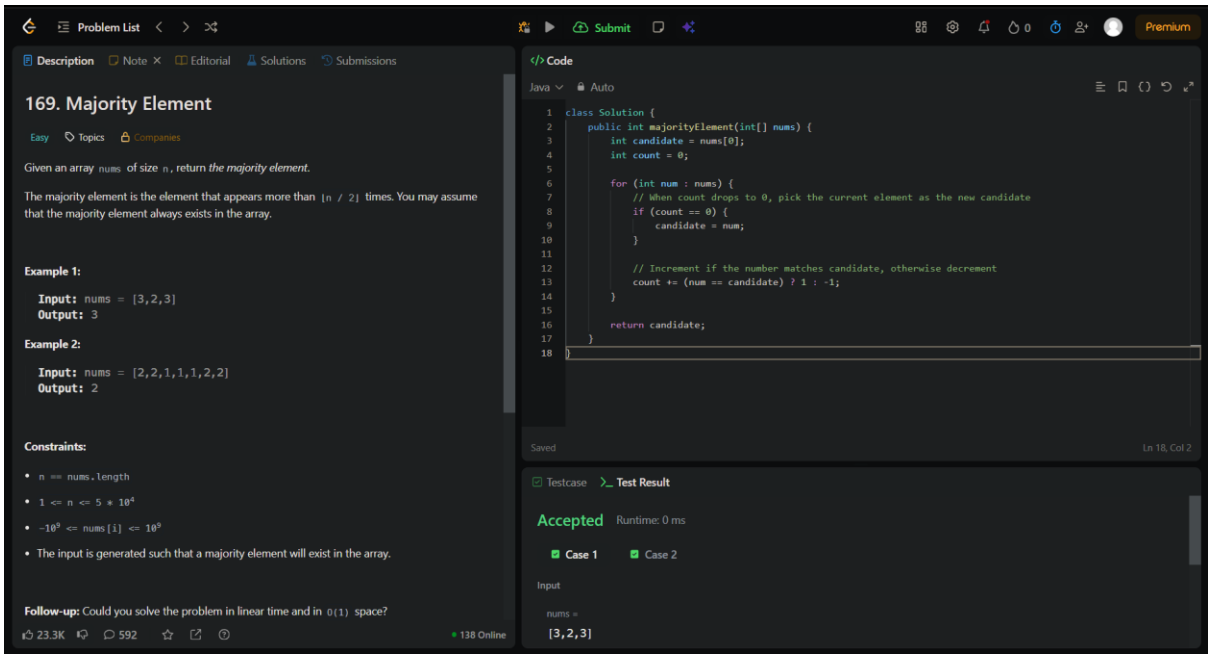
18.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
409. Longest Palindrome
Easy
Topics
Companies
Given a string s which consists of lowercase or uppercase letters, return the length of the longest palindrome that can be built with those letters.
Letters are case sensitive, for example, "Aa" is not considered a palindrome.
Example 1:
Input: s = "abccccdd"
Output: 7
Explanation: One longest palindrome that can be built is "dccaccd", whose length is 7.
Example 2:
Input: s = "a"
Output: 1
Explanation: The longest palindrome that can be built is "a", whose length is 1.
Constraints:
1 <= s.length <= 2000
s consists of lowercase and/or uppercase English letters only.
6.5K
282
16 Online
Code
Java
Auto
class Solution {
public int longestPalindrome(String s) {
int[] counts = new int[128]; // Covers all ASCII uppercase and lowercase letters
for (char c : s.toCharArray()) {
counts[c]++;
}
int length = 0;
boolean hasOdd = false;
for (int count : counts) {
// Add the largest even part of the character's count
length += (count / 2) * 2;
if (count % 2 == 1) {
hasOdd = true;
}
}
// A palindrome can have at most one single character in the very center
return hasOdd ? length + 1 : length;
}
}
Saved
Ln 23, Col 2
Testcase
Test Result
You must run your code first

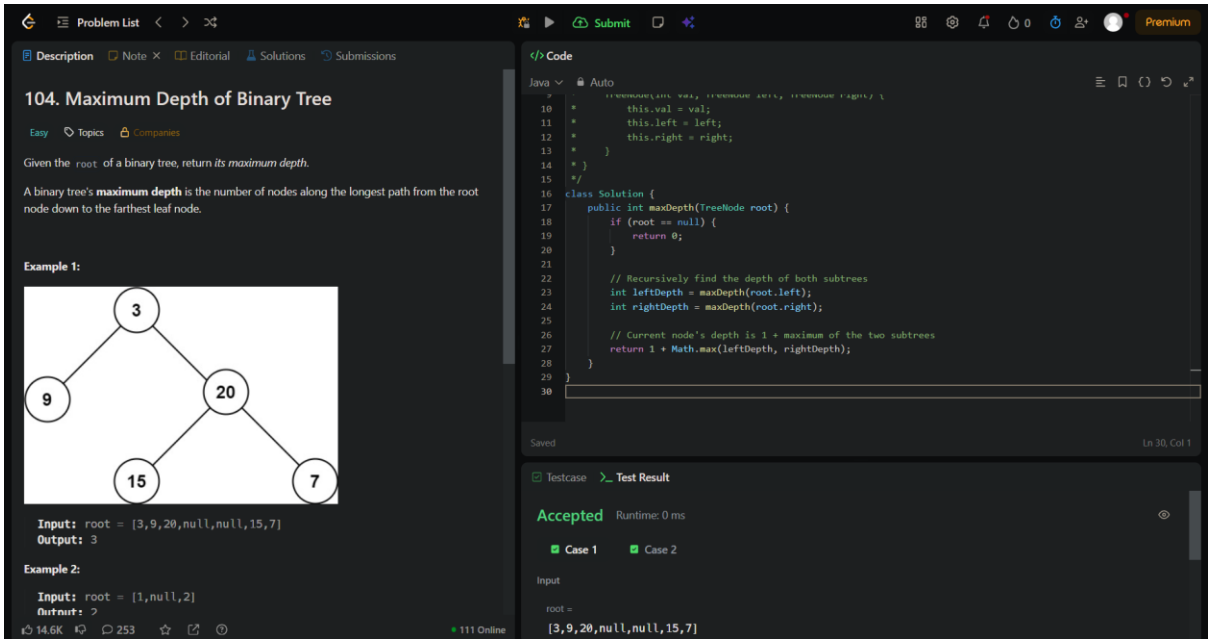
19.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
235. Lowest Common Ancestor of a Binary Search Tree
Medium
Topics
Companies
Given a binary search tree (BST), find the lowest common ancestor (LCA) node of two given nodes in the BST.
According to the definition of LCA on Wikipedia: "The lowest common ancestor is defined between two nodes p and q as the lowest node in T that has both p and q as descendants (where we allow a node to be a descendant of itself)."
Example 1:
Input: root = [6,2,8,0,4,7,9,null,null,3,5], p = 2, q = 8
Output: 6
Explanation: The LCA of nodes 2 and 8 is 6.
Example 2:
12.5K
182
39 Online
Code
Java
Auto
class Solution {
public TreeNode lowestCommonAncestor(TreeNode root, TreeNode p, TreeNode q) {
TreeNode curr = root;
while (curr != null) {
if (p.val > curr.val && q.val > curr.val) {
curr = curr.right;
} else if (p.val < curr.val && q.val < curr.val) {
curr = curr.left;
} else {
return curr; // Split point or one of the nodes is the ancestor
}
}
return null;
}
}
Saved
Ln 17, Col 2
Testcase
Test Result
You must run your code first

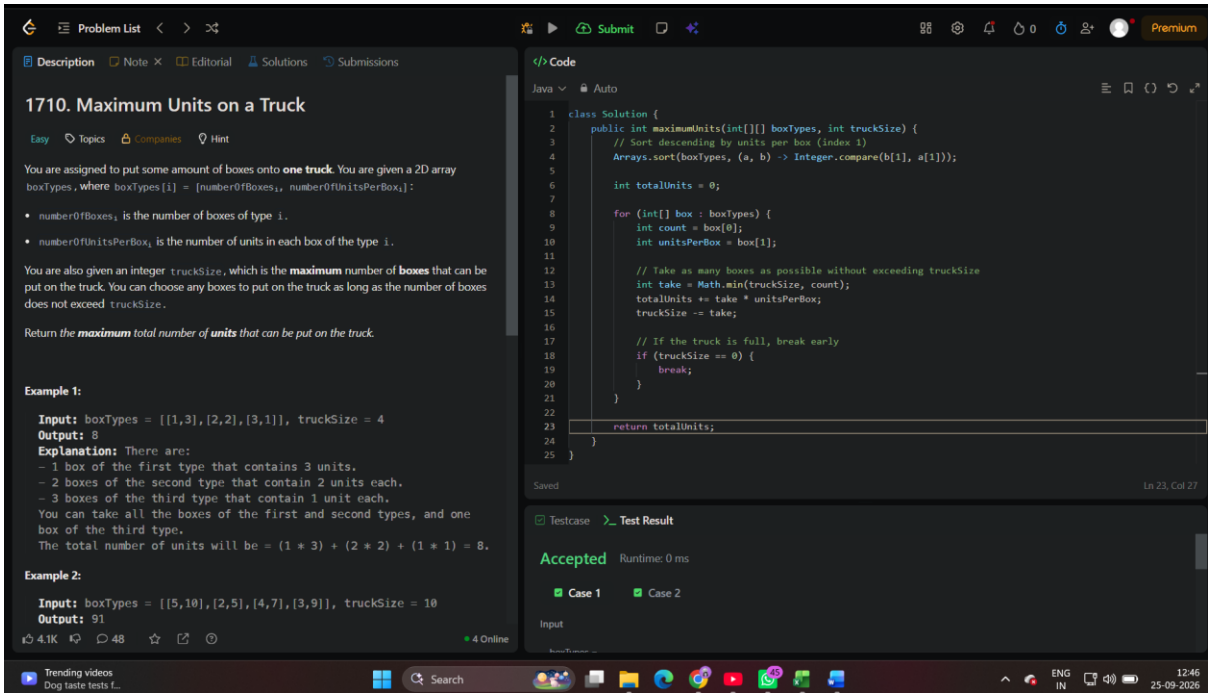
20.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
169. Majority Element
Easy
Topics
Companies
Given an array nums of size n, return the majority element.
The majority element is the element that appears more than ⌊n / 2⌋ times. You may assume that the majority element always exists in the array.
Example 1:
Input: nums = [3,2,3]
Output: 3
Example 2:
Input: nums = [2,2,1,1,1,2,2]
Output: 2
Constraints:
n == nums.length
1 <= n <= 5 * 10^4
-10^9 <= nums[i] <= 10^9
The input is generated such that a majority element will exist in the array.
Follow-up: Could you solve the problem in linear time and in O(1) space?
23.3K
592
138 Online
Code
Java
Auto
class Solution {
public int majorityElement(int[] nums) {
int candidate = nums[0];
int count = 0;
for (int num : nums) {
// When count drops to 0, pick the current element as the new candidate
if (count == 0) {
candidate = num;
}
// Increment if the number matches candidate, otherwise decrement
count += (num == candidate) ? 1 : -1;
}
return candidate;
}
}
Saved
Ln 18, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
nums =
[3,2,3]

21.

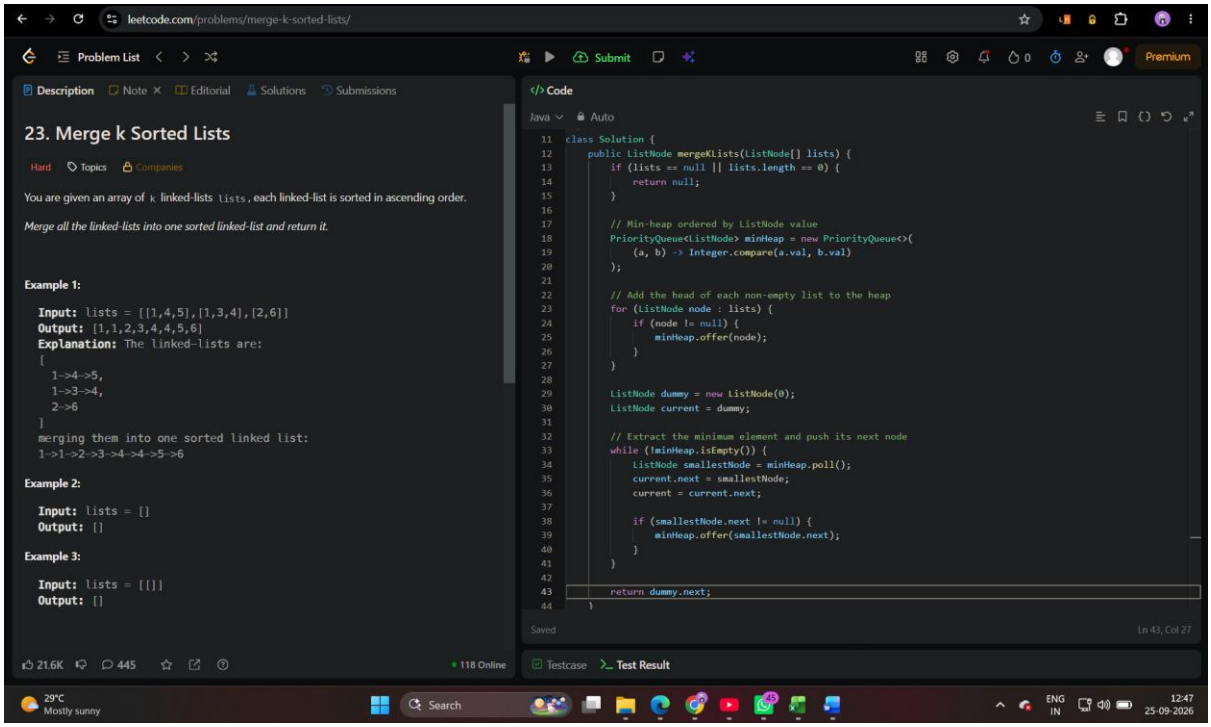

Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
104. Maximum Depth of Binary Tree
Easy
Topics
Companies
Given the root of a binary tree, return its maximum depth.
A binary tree's maximum depth is the number of nodes along the longest path from the root node down to the farthest leaf node.
Example 1:
3
9
20
15
7
Input: root = [3,9,20,null,null,15,7]
Output: 3
Example 2:
Input: root = [1,null,2]
14.6K
253
111 Online
Code
Java
Auto
class Solution {
public int maxDepth(TreeNode root) {
if (root == null) {
return 0;
}
// Recursively find the depth of both subtrees
int leftDepth = maxDepth(root.left);
int rightDepth = maxDepth(root.right);
// Current node's depth is 1 + maximum of the two subtrees
return 1 + Math.max(leftDepth, rightDepth);
}
}
Saved
Ln 30, Col 1
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
root =
[3,9,20,null,null,15,7]

22.

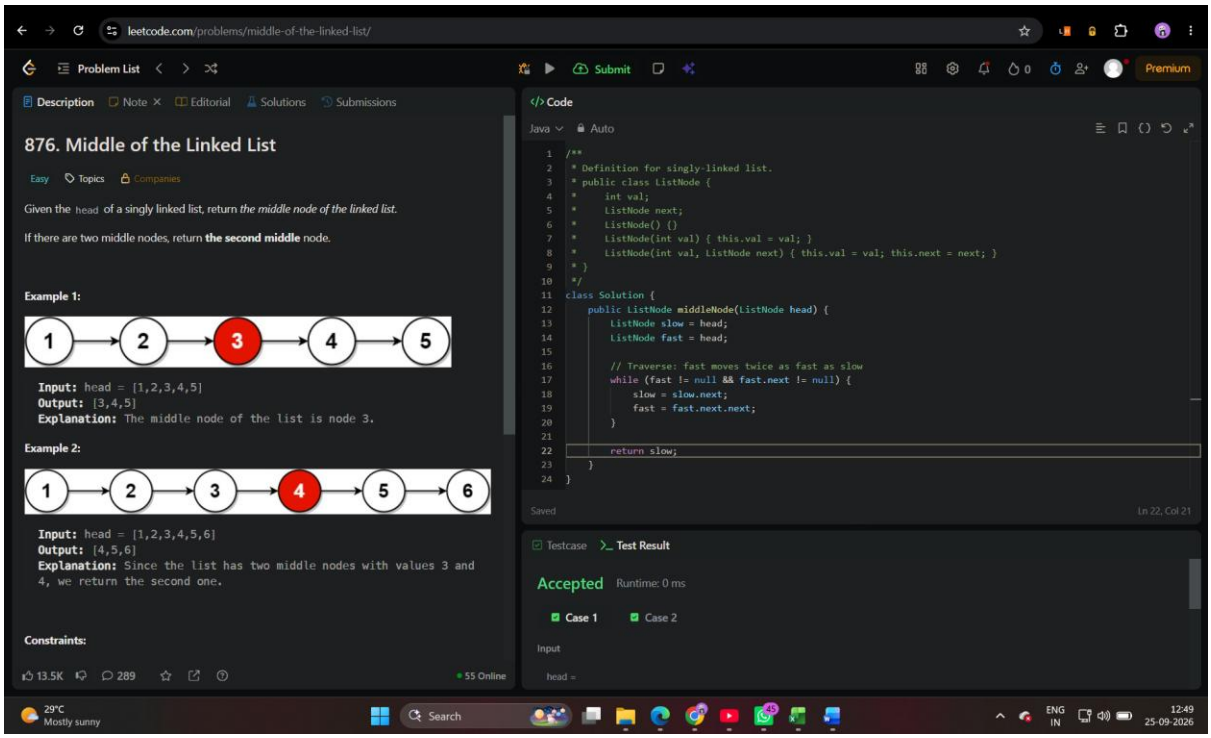

Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
1710. Maximum Units on a Truck
Easy
Topics
Companies
Hint
You are assigned to put some amount of boxes onto one truck. You are given a 2D array boxTypes, where boxTypes[i] = [numberOfBoxes_i, numberOfUnitsPerBox_i]:
numberOfBoxes_i is the number of boxes of type i.
numberOfUnitsPerBox_i is the number of units in each box of the type i.
You are also given an integer truckSize, which is the maximum number of boxes that can be put on the truck. You can choose any boxes to put on the truck as long as the number of boxes does not exceed truckSize.
Return the maximum total number of units that can be put on the truck.
Example 1:
Input: boxTypes = [[1,3],[2,2],[3,1]], truckSize = 4
Output: 8
Explanation: There are:
- 1 box of the first type that contains 3 units.
- 2 boxes of the second type that contain 2 units each.
- 3 boxes of the third type that contain 1 unit each.
You can take all the boxes of the first and second types, and one box of the third type.
The total number of units will be = (1 * 3) + (2 * 2) + (1 * 1) = 8.
Example 2:
Input: boxTypes = [[5,10],[2,5],[4,7],[3,9]], truckSize = 10
Output: 91
4.1K
48
4 Online
Code
Java
Auto
class Solution {
public int maximumUnits(int[][] boxTypes, int truckSize) {
// Sort descending by units per box (index 1)
Arrays.sort(boxTypes, (a, b) -> Integer.compare(b[1], a[1]));
int totalUnits = 0;
for (int[] box : boxTypes) {
int count = box[0];
int unitsPerBox = box[1];
// Take as many boxes as possible without exceeding truckSize
int take = Math.min(truckSize, count);
totalUnits += take * unitsPerBox;
truckSize -= take;
// If the truck is full, break early
if (truckSize == 0) {
break;
}
}
return totalUnits;
}
}
Saved
Ln 23, Col 27
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
Trending videos
Dog taste tests f...
Search
ENG
IN
12:46
25-09-2026

23.

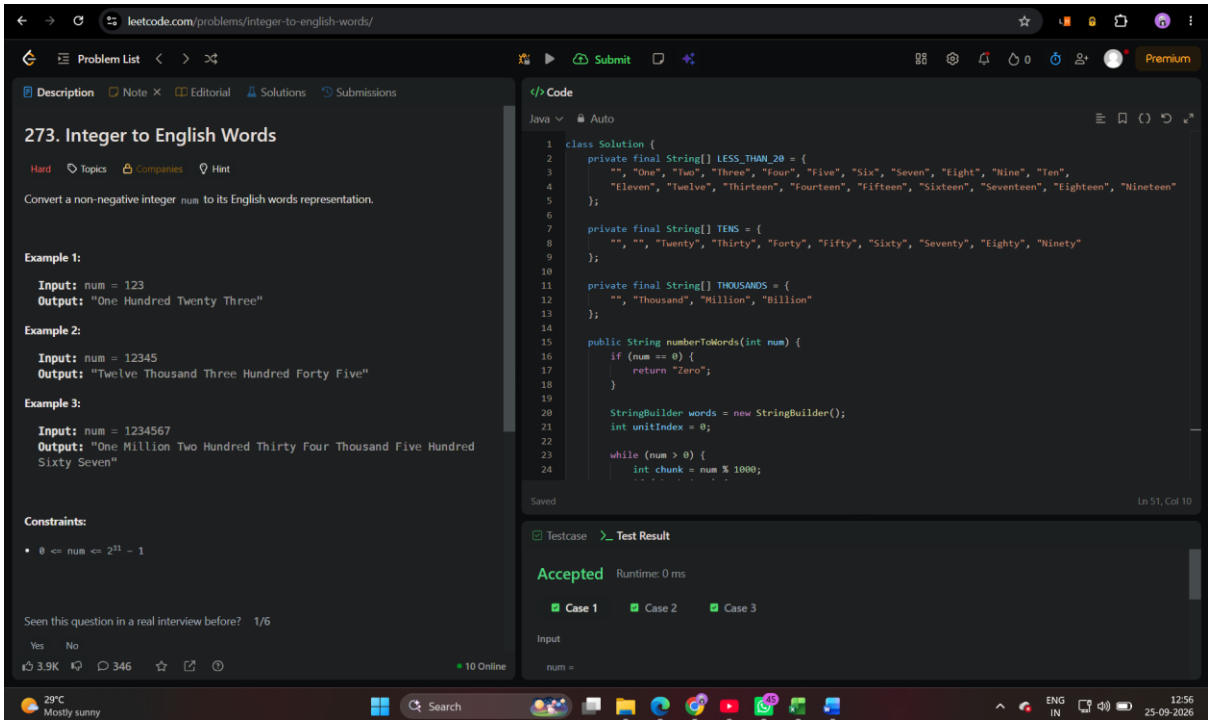
0


leetcode.com/problems/merge-k-sorted-lists/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
23. Merge k Sorted Lists
Hard
Topics
Companies
You are given an array of k linked-lists lists, each linked-list is sorted in ascending order.
Merge all the linked-lists into one sorted linked-list and return it.
Example 1:
Input: lists = [[1,4,5],[1,3,4],[2,6]]
Output: [1,1,2,3,4,4,5,6]
Explanation: The linked-lists are:
[
1->4->5,
1->3->4,
2->6
]
merging them into one sorted linked list:
1->1->2->3->4->4->5->6
Example 2:
Input: lists = []
Output: []
Example 3:
Input: lists = [[]]
Output: []
21.6K
445
118 Online
Code
Java
Auto
class Solution {
public ListNode mergeKLists(ListNode[] lists) {
if (lists == null || lists.length == 0) {
return null;
}
// Min-heap ordered by ListNode value
PriorityQueue<ListNode> minHeap = new PriorityQueue<>(
(a, b) -> Integer.compare(a.val, b.val)
);
// Add the head of each non-empty list to the heap
for (ListNode node : lists) {
if (node != null) {
minHeap.offer(node);
}
}
ListNode dummy = new ListNode(0);
ListNode current = dummy;
// Extract the minimum element and push its next node
while (!minHeap.isEmpty()) {
ListNode smallestNode = minHeap.poll();
current.next = smallestNode;
current = current.next;
if (smallestNode.next != null) {
minHeap.offer(smallestNode.next);
}
}
return dummy.next;
}
Saved
Ln 43, Col 27
Testcase
Test Result
29°C
Mostly sunny
Search
ENG
IN
12:47
25-09-2026

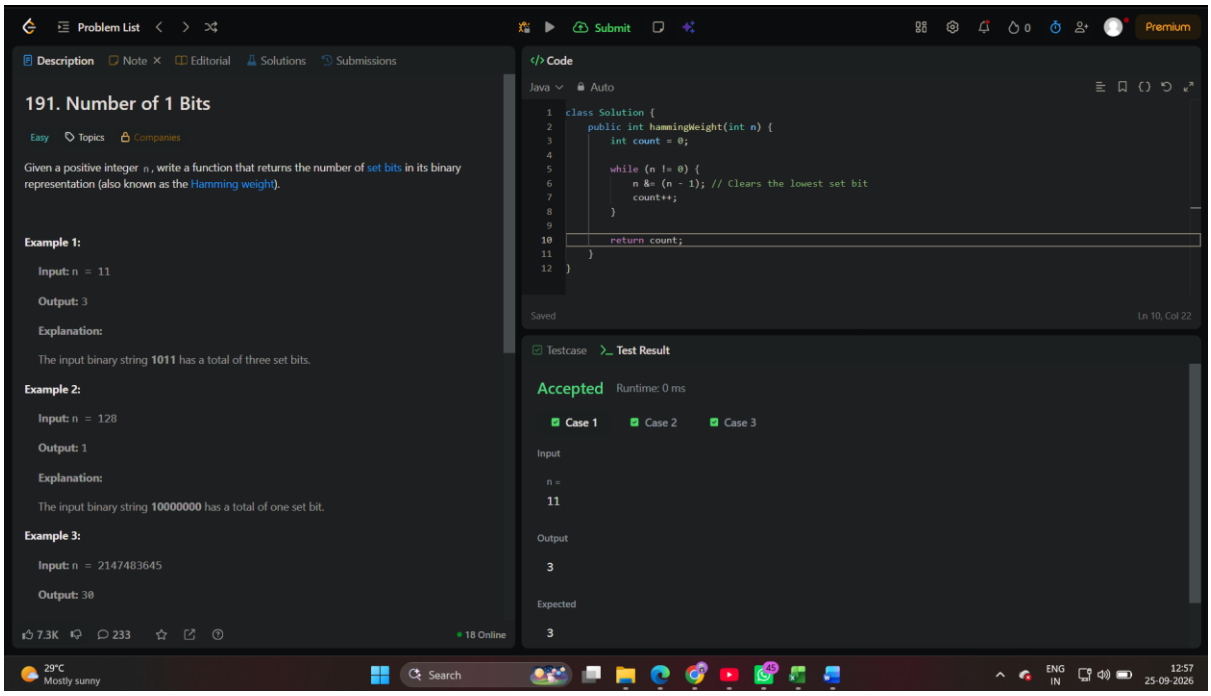
24.


leetcode.com/problems/middle-of-the-linked-list/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
876. Middle of the Linked List
Easy
Topics
Companies
Given the head of a singly linked list, return the middle node of the linked list.
If there are two middle nodes, return the second middle node.
Example 1:
1
2
3
4
5
Input: head = [1,2,3,4,5]
Output: [3,4,5]
Explanation: The middle node of the list is node 3.
Example 2:
1
2
3
4
5
6
Input: head = [1,2,3,4,5,6]
Output: [4,5,6]
Explanation: Since the list has two middle nodes with values 3 and 4, we return the second one.
Constraints:
13.5K
289
55 Online
Code
Java
Auto
/**
* Definition for singly-linked list.
* public class ListNode {
* int val;
* ListNode next;
* ListNode() {}
* ListNode(int val) { this.val = val; }
* ListNode(int val, ListNode next) { this.val = val; this.next = next; }
* }
*/
class Solution {
public ListNode middleNode(ListNode head) {
ListNode slow = head;
ListNode fast = head;
// Traverse: fast moves twice as fast as slow
while (fast != null && fast.next != null) {
slow = slow.next;
fast = fast.next.next;
}
return slow;
}
}
Saved
Ln 22, Col 21
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
head =
29°C
Mostly sunny
Search
ENG
IN
12:49
25-09-2026

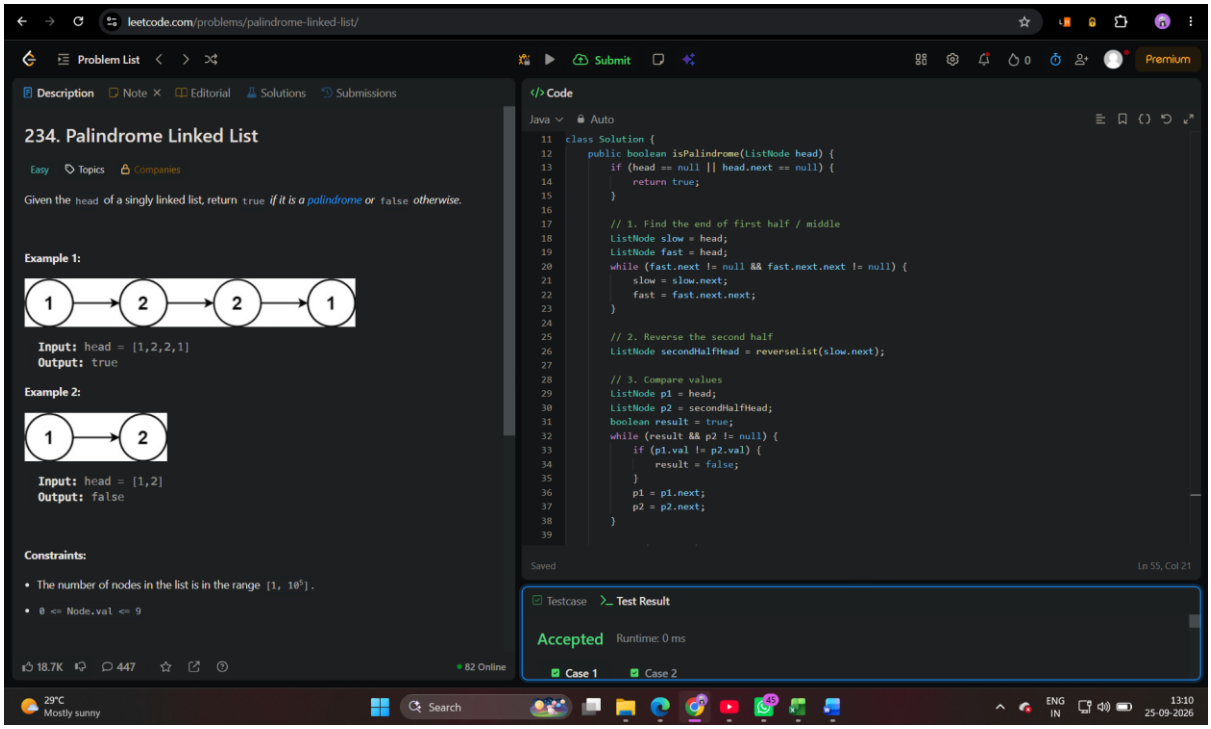
25.


leetcode.com/problems/integer-to-english-words/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
273. Integer to English Words
Hard
Topics
Companies
Hint
Convert a non-negative integer num to its English words representation.
Example 1:
Input: num = 123
Output: "One Hundred Twenty Three"
Example 2:
Input: num = 12345
Output: "Twelve Thousand Three Hundred Forty Five"
Example 3:
Input: num = 1234567
Output: "One Million Two Hundred Thirty Four Thousand Five Hundred Sixty Seven"
Constraints:
0 <= num <= 2^31 - 1
Seen this question in a real interview before? 1/6
Yes
No
3.9K
346
10 Online
Code
Java
Auto
class Solution {
private final String[] LESS_THAN_20 = {
"", "One", "Two", "Three", "Four", "Five", "Six", "Seven", "Eight", "Nine", "Ten",
"Eleven", "Twelve", "Thirteen", "Fourteen", "Fifteen", "Sixteen", "Seventeen", "Eighteen", "Nineteen"
};
private final String[] TENS = {
"", "", "Twenty", "Thirty", "Forty", "Fifty", "Sixty", "Seventy", "Eighty", "Ninety"
};
private final String[] THOUSANDS = {
"", "Thousand", "Million", "Billion"
};
public String numberToWords(int num) {
if (num == 0) {
return "Zero";
}
StringBuilder words = new StringBuilder();
int unitIndex = 0;
while (num > 0) {
int chunk = num % 1000;
Saved
Ln 51, Col 10
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
num =
29°C
Mostly sunny
Search
ENG
IN
12:56
25-09-2026

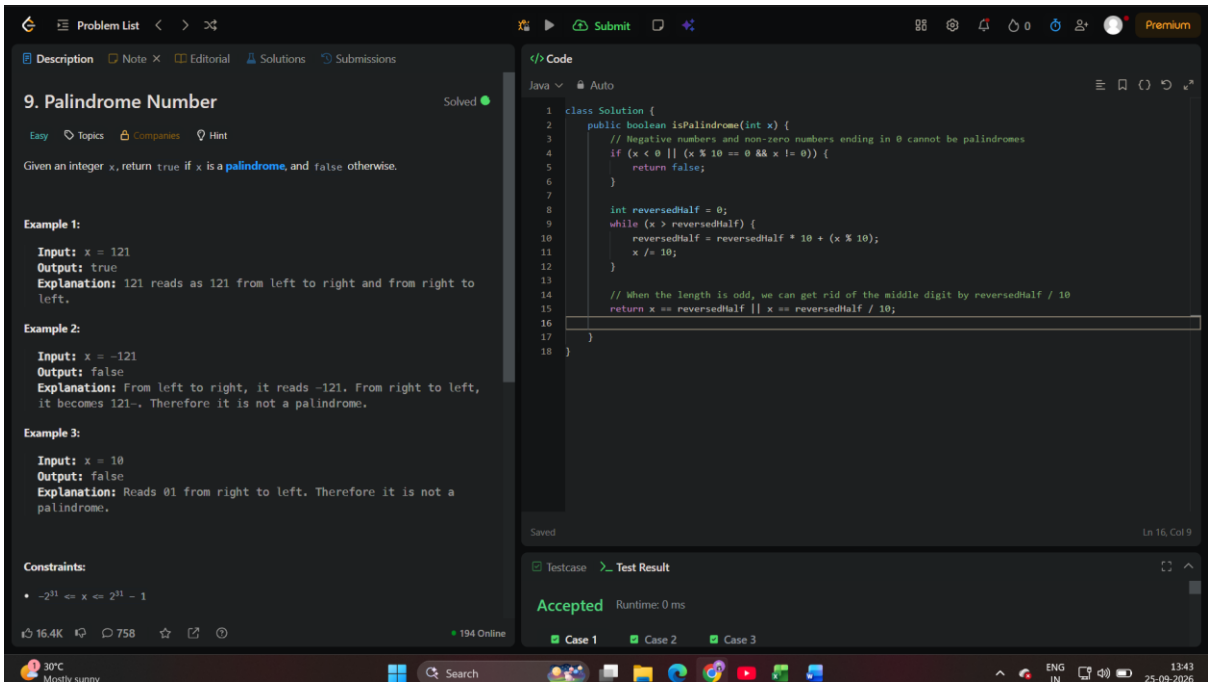
26.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
191. Number of 1 Bits
Easy
Topics
Companies
Given a positive integer n, write a function that returns the number of set bits in its binary representation (also known as the Hamming weight).
Example 1:
Input: n = 11
Output: 3
Explanation:
The input binary string 1011 has a total of three set bits.
Example 2:
Input: n = 128
Output: 1
Explanation:
The input binary string 10000000 has a total of one set bit.
Example 3:
Input: n = 2147483645
Output: 30
7.3K
233
18 Online
Code
Java
Auto
class Solution {
public int hammingWeight(int n) {
int count = 0;
while (n != 0) {
n &= (n - 1); // Clears the lowest set bit
count++;
}
return count;
}
}
Saved
Ln 10, Col 22
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
n =
11
Output
3
Expected
3
29°C
Mostly sunny
Search
ENG
IN
12:57
25-09-2026

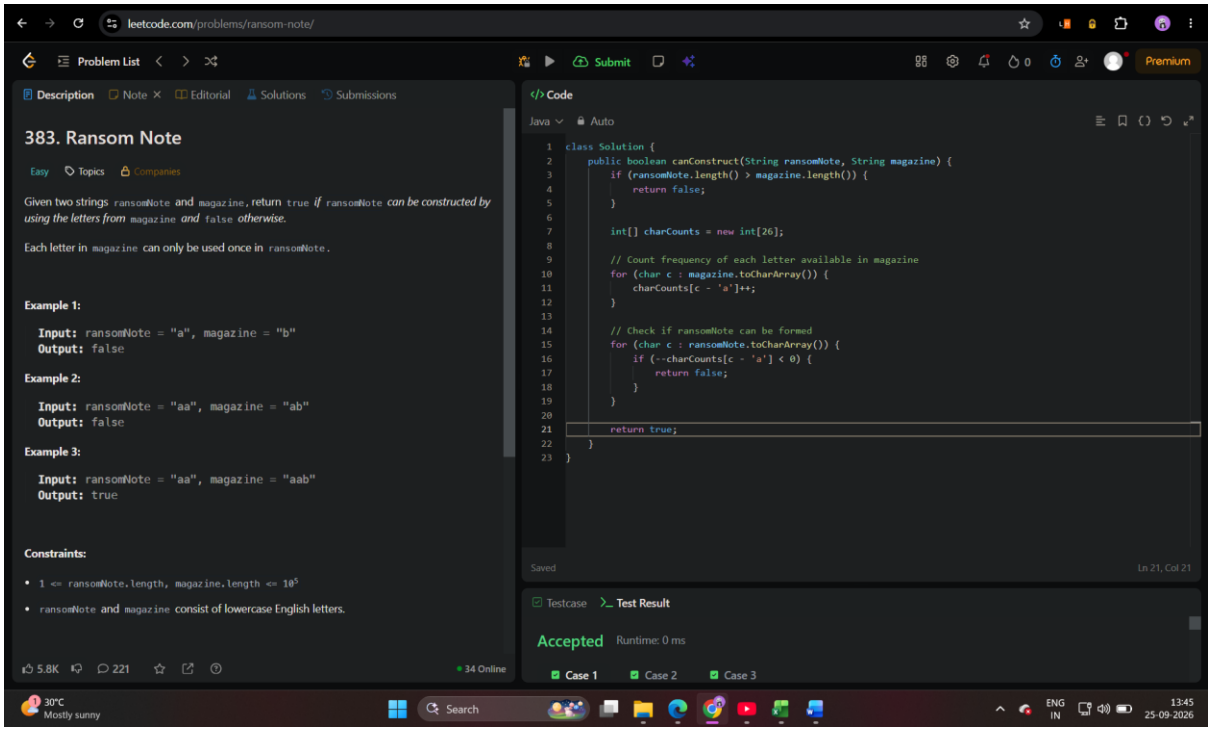
27.


leetcode.com/problems/palindrome-linked-list/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
234. Palindrome Linked List
Easy
Topics
Companies
Given the head of a singly linked list, return true if it is a palindrome or false otherwise.
Example 1:
Input: head = [1,2,2,1]
Output: true
Example 2:
Input: head = [1,2]
Output: false
Constraints:
The number of nodes in the list is in the range [1, 10^5].
0 <= Node.val <= 9
18.7K
447
82 Online
Code
Java
Auto
class Solution {
public boolean isPalindrome(ListNode head) {
if (head == null || head.next == null) {
return true;
}
// 1. Find the end of first half / middle
ListNode slow = head;
ListNode fast = head;
while (fast.next != null && fast.next.next != null) {
slow = slow.next;
fast = fast.next.next;
}
// 2. Reverse the second half
ListNode secondHalfHead = reverseList(slow.next);
// 3. Compare values
ListNode p1 = head;
ListNode p2 = secondHalfHead;
boolean result = true;
while (result && p2 != null) {
if (p1.val != p2.val) {
result = false;
}
p1 = p1.next;
p2 = p2.next;
}
Saved
Ln 55, Col 21
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
29°C
Mostly sunny
Search
ENG
IN
13:10
25-09-2026

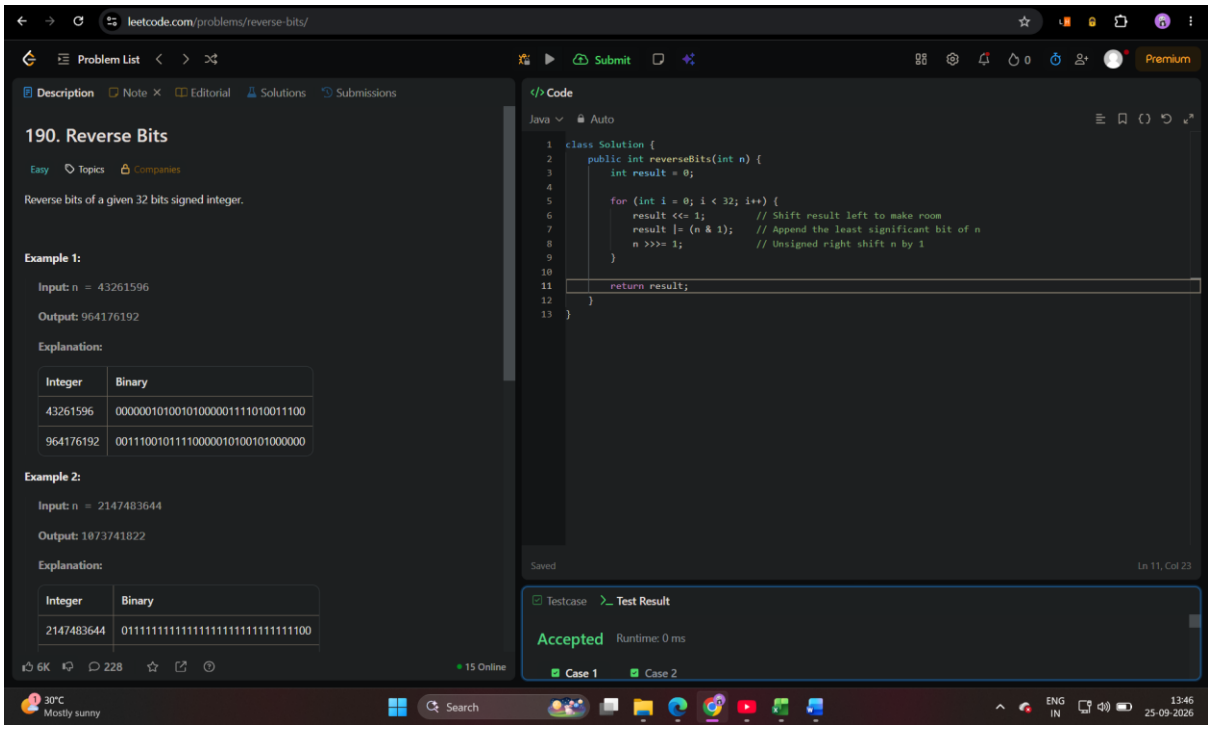
28.


Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
9. Palindrome Number
Solved
Easy
Topics
Companies
Hint
Given an integer x, return true if x is a palindrome, and false otherwise.
Example 1:
Input: x = 121
Output: true
Explanation: 121 reads as 121 from left to right and from right to left.
Example 2:
Input: x = -121
Output: false
Explanation: From left to right, it reads -121. From right to left, it becomes 121-. Therefore it is not a palindrome.
Example 3:
Input: x = 10
Output: false
Explanation: Reads 01 from right to left. Therefore it is not a palindrome.
Constraints:
-2^31 <= x <= 2^31 - 1
16.4K
758
194 Online
Code
Java
Auto
class Solution {
public boolean isPalindrome(int x) {
// Negative numbers and non-zero numbers ending in 0 cannot be palindromes
if (x < 0 || (x % 10 == 0 && x != 0)) {
return false;
}
int reversedHalf = 0;
while (x > reversedHalf) {
reversedHalf = reversedHalf * 10 + (x % 10);
x /= 10;
}
// When the length is odd, we can get rid of the middle digit by reversedHalf / 10
return x == reversedHalf || x == reversedHalf / 10;
}
}
Saved
Ln 16, Col 9
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
30°C
Mostly sunny
Search
ENG
IN
13:43
25-09-2026

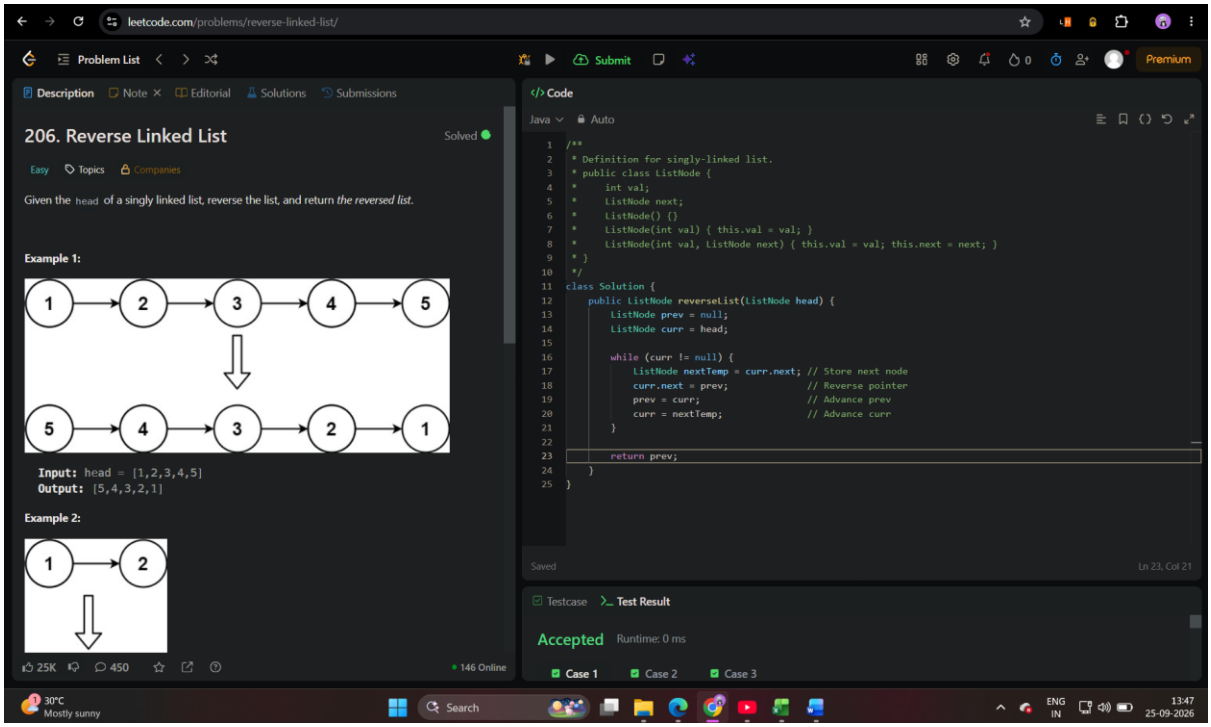
29.


leetcode.com/problems/ransom-note/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
383. Ransom Note
Easy
Topics
Companies
Given two strings ransomNote and magazine, return true if ransomNote can be constructed by using the letters from magazine and false otherwise.
Each letter in magazine can only be used once in ransomNote.
Example 1:
Input: ransomNote = "a", magazine = "b"
Output: false
Example 2:
Input: ransomNote = "aa", magazine = "ab"
Output: false
Example 3:
Input: ransomNote = "aa", magazine = "aab"
Output: true
Constraints:
1 <= ransomNote.length, magazine.length <= 10^5
ransomNote and magazine consist of lowercase English letters.
5.8K
221
34 Online
Code
Java
Auto
class Solution {
public boolean canConstruct(String ransomNote, String magazine) {
if (ransomNote.length() > magazine.length()) {
return false;
}
int[] charCounts = new int[26];
// Count frequency of each letter available in magazine
for (char c : magazine.toCharArray()) {
charCounts[c - 'a']++;
}
// Check if ransomNote can be formed
for (char c : ransomNote.toCharArray()) {
if (--charCounts[c - 'a'] < 0) {
return false;
}
}
return true;
}
}
Saved
Ln 21, Col 21
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
30°C
Mostly sunny
Search
ENG
IN
13:45
25-09-2026

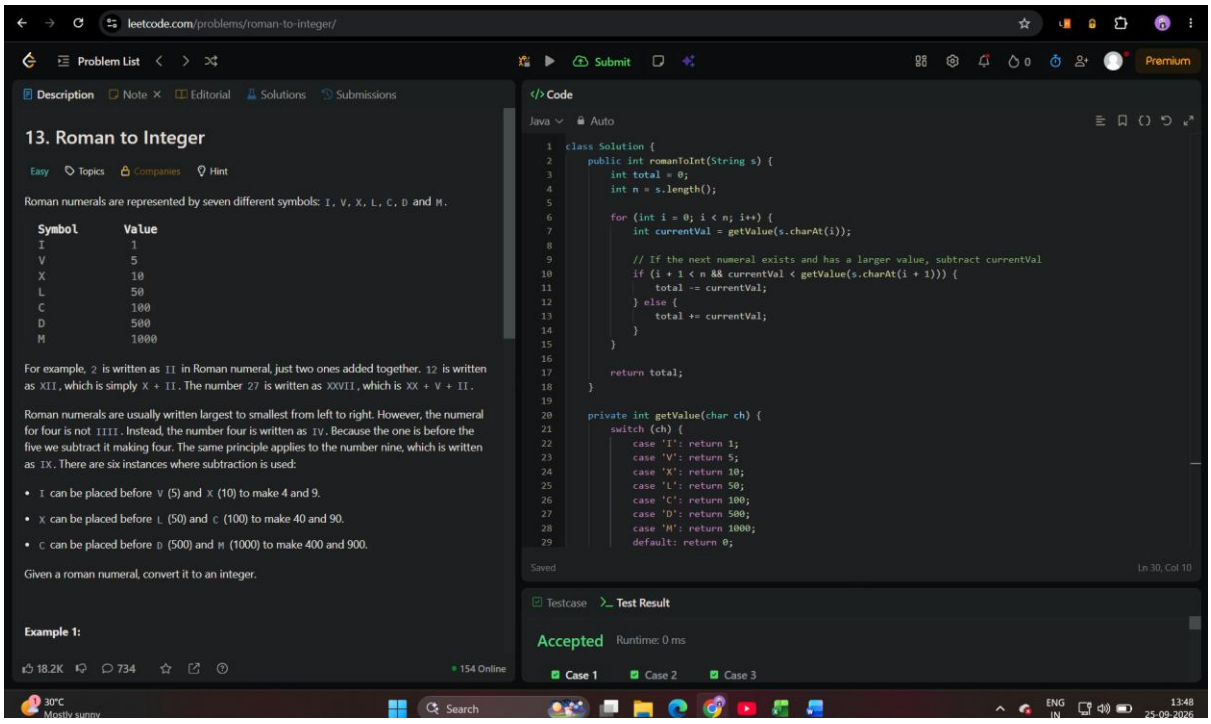
30.


leetcode.com/problems/reverse-bits/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
190. Reverse Bits
Easy
Topics
Companies
Reverse bits of a given 32 bits signed integer.
Example 1:
Input: n = 43261596
Output: 964176192
Explanation:
Integer
Binary
43261596
00000010100101000001111010011100
964176192
00111001011110000010100101000000
Example 2:
Input: n = 2147483644
Output: 1073741822
Explanation:
Integer
Binary
2147483644
01111111111111111111111111111100
6K
228
15 Online
Code
Java
Auto
class Solution {
public int reverseBits(int n) {
int result = 0;
for (int i = 0; i < 32; i++) {
result <<= 1;
// Shift result left to make room
result |= (n & 1);
// Append the least significant bit of n
n >>>= 1;
// Unsigned right shift n by 1
}
return result;
}
}
Saved
Ln 11, Col 23
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
30°C
Mostly sunny
Search
ENG
IN
13:46
25-09-2026

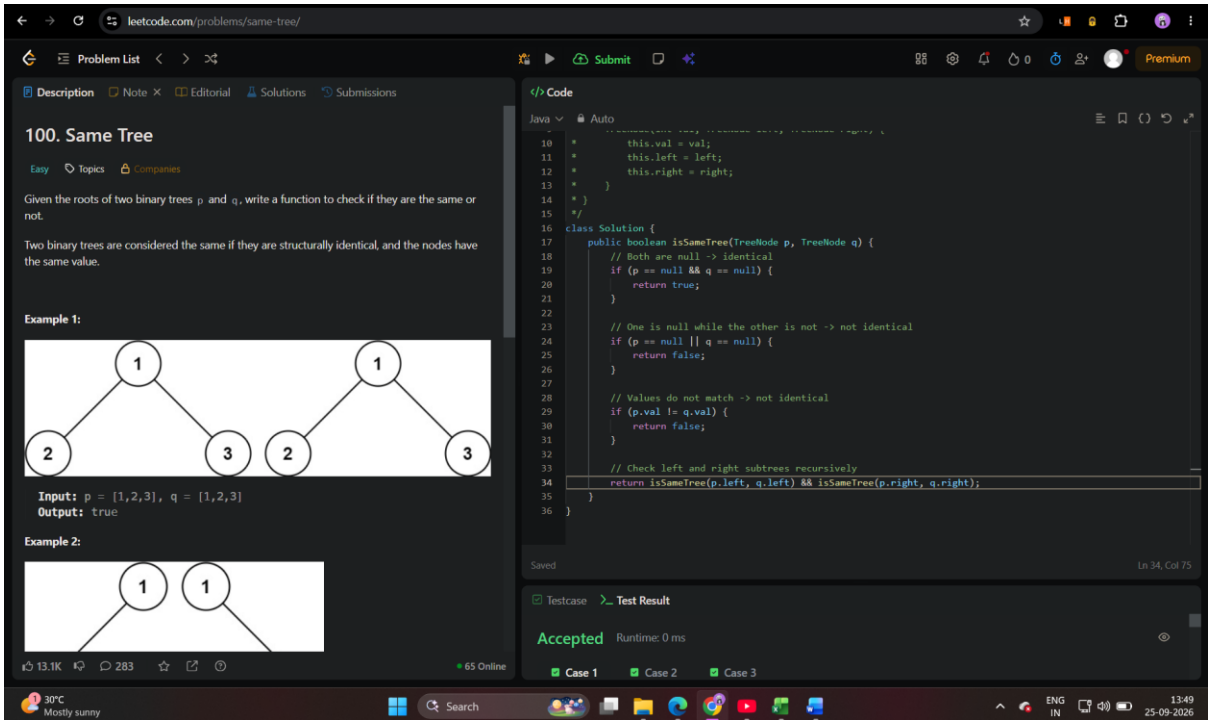
31.


leetcode.com/problems/reverse-linked-list/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
206. Reverse Linked List
Solved
Easy
Topics
Companies
Given the head of a singly linked list, reverse the list, and return the reversed list.
Example 1:
Input: head = [1,2,3,4,5]
Output: [5,4,3,2,1]
Example 2:
25K
450
146 Online
Code
Java
Auto
/**
* Definition for singly-linked list.
* public class ListNode {
* int val;
* ListNode next;
* ListNode() {}
* ListNode(int val) { this.val = val; }
* ListNode(int val, ListNode next) { this.val = val; this.next = next; }
* }
*/
class Solution {
public ListNode reverseList(ListNode head) {
ListNode prev = null;
ListNode curr = head;
while (curr != null) {
ListNode nextTemp = curr.next; // Store next node
curr.next = prev; // Reverse pointer
prev = curr; // Advance prev
curr = nextTemp; // Advance curr
}
return prev;
}
}
Saved
Ln 23, Col 21
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
30°C
Mostly sunny
Search
ENG
IN
13:47
25-09-2026

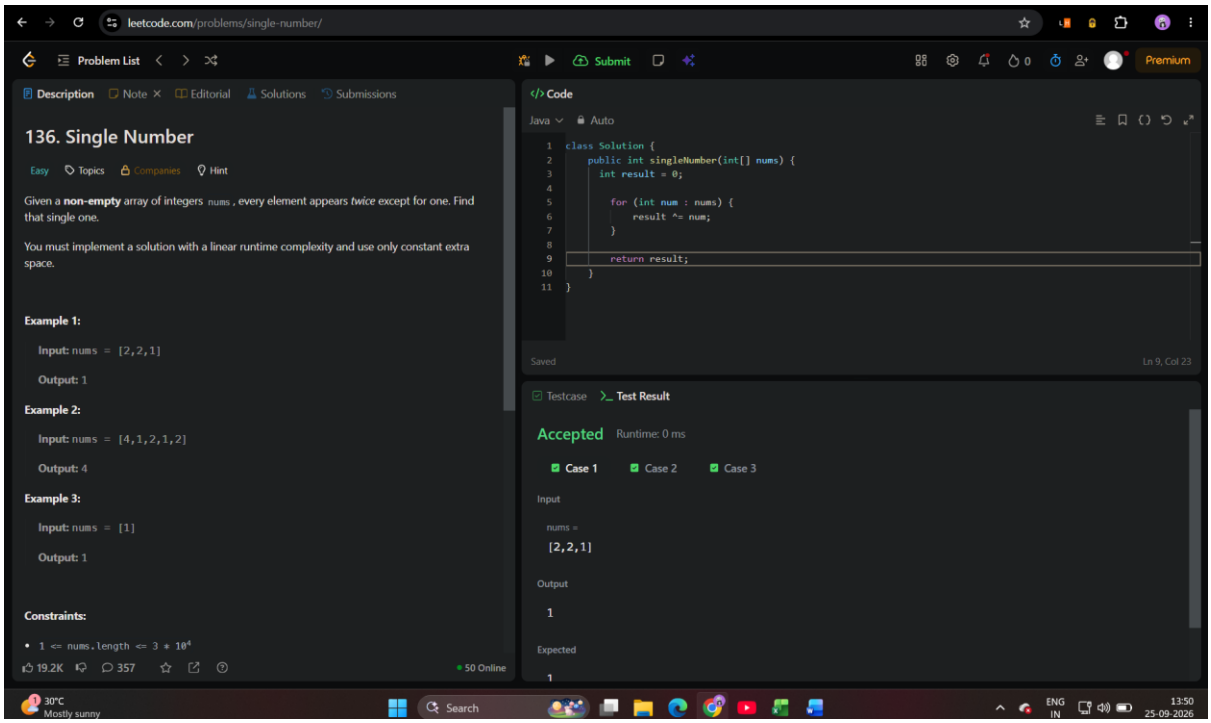
32


leetcode.com/problems/roman-to-integer/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
13. Roman to Integer
Easy
Topics
Companies
Hint
Roman numerals are represented by seven different symbols: I, V, X, L, C, D and M.
Symbol Value
I 1
V 5
X 10
L 50
C 100
D 500
M 1000
For example, 2 is written as II in Roman numeral, just two ones added together. 12 is written as XII, which is simply X + II. The number 27 is written as XXVII, which is XX + V + II.
Roman numerals are usually written largest to smallest from left to right. However, the numeral for four is not IIII. Instead, the number four is written as IV. Because the one is before the five we subtract it making four. The same principle applies to the number nine, which is written as IX. There are six instances where subtraction is used:
I can be placed before V (5) and X (10) to make 4 and 9.
X can be placed before L (50) and C (100) to make 40 and 90.
C can be placed before D (500) and M (1000) to make 400 and 900.
Given a roman numeral, convert it to an integer.
Example 1:
18.2K
734
154 Online
Code
Java
Auto
class Solution {
public int romanToInt(String s) {
int total = 0;
int n = s.length();
for (int i = 0; i < n; i++) {
int currentVal = getValue(s.charAt(i));
// If the next numeral exists and has a larger value, subtract currentVal
if (i + 1 < n && currentVal < getValue(s.charAt(i + 1))) {
total -= currentVal;
} else {
total += currentVal;
}
}
return total;
}
private int getValue(char ch) {
switch (ch) {
case 'I': return 1;
case 'V': return 5;
case 'X': return 10;
case 'L': return 50;
case 'C': return 100;
case 'D': return 500;
case 'M': return 1000;
default: return 0;
Saved
Ln 30, Col 10
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
30°C
Mostly sunny
Search
ENG
IN
13:48
25-09-2026

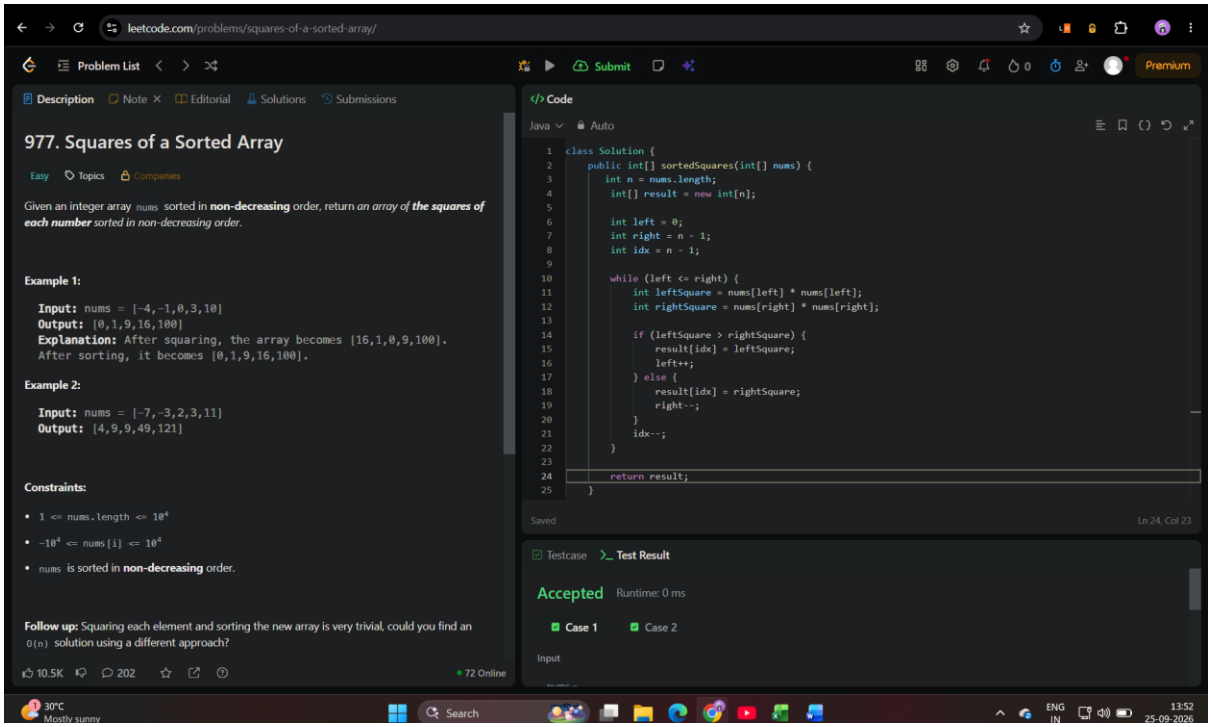
33


leetcode.com/problems/same-tree/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
100. Same Tree
Easy
Topics
Companies
Given the roots of two binary trees p and q, write a function to check if they are the same or not.
Two binary trees are considered the same if they are structurally identical, and the nodes have the same value.
Example 1:
Input: p = [1,2,3], q = [1,2,3]
Output: true
Example 2:
13.1K
283
65 Online
Code
Java
Auto
class Solution {
public boolean isSameTree(TreeNode p, TreeNode q) {
// Both are null -> identical
if (p == null && q == null) {
return true;
}
// One is null while the other is not -> not identical
if (p == null || q == null) {
return false;
}
// Values do not match -> not identical
if (p.val != q.val) {
return false;
}
// Check left and right subtrees recursively
return isSameTree(p.left, q.left) && isSameTree(p.right, q.right);
}
}
Saved
Ln 34, Col 75
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
30°C
Mostly sunny
Search
ENG
IN
13:49
25-09-2026

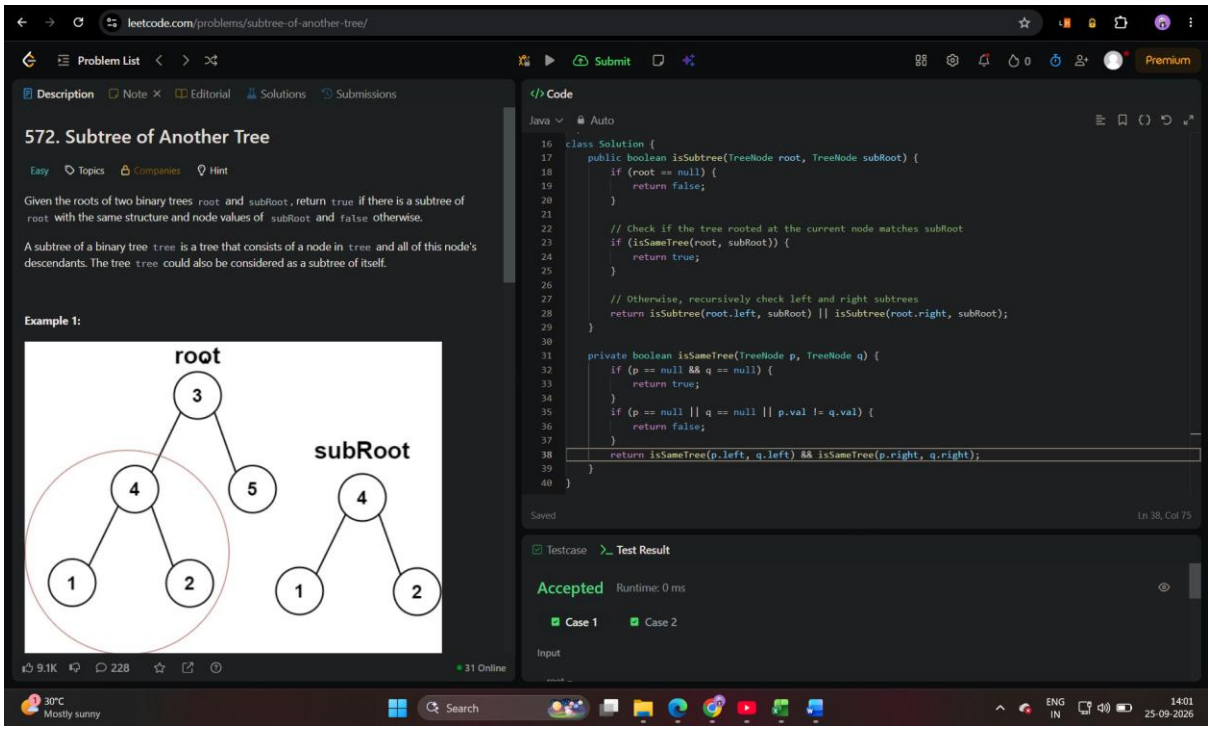
34


leetcode.com/problems/single-number/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
136. Single Number
Easy
Topics
Companies
Hint
Given a non-empty array of integers nums, every element appears twice except for one. Find that single one.
You must implement a solution with a linear runtime complexity and use only constant extra space.
Example 1:
Input: nums = [2,2,1]
Output: 1
Example 2:
Input: nums = [4,1,2,1,2]
Output: 4
Example 3:
Input: nums = [1]
Output: 1
Constraints:
1 <= nums.length <= 3 * 10^4
19.2K
357
50 Online
Code
Java
Auto
class Solution {
public int singleNumber(int[] nums) {
int result = 0;
for (int num : nums) {
result ^= num;
}
return result;
}
}
Saved
Ln 9, Col 23
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[2,2,1]
Output
1
Expected
1
30°C
Mostly sunny
Search
ENG
IN
13:50
25-09-2026

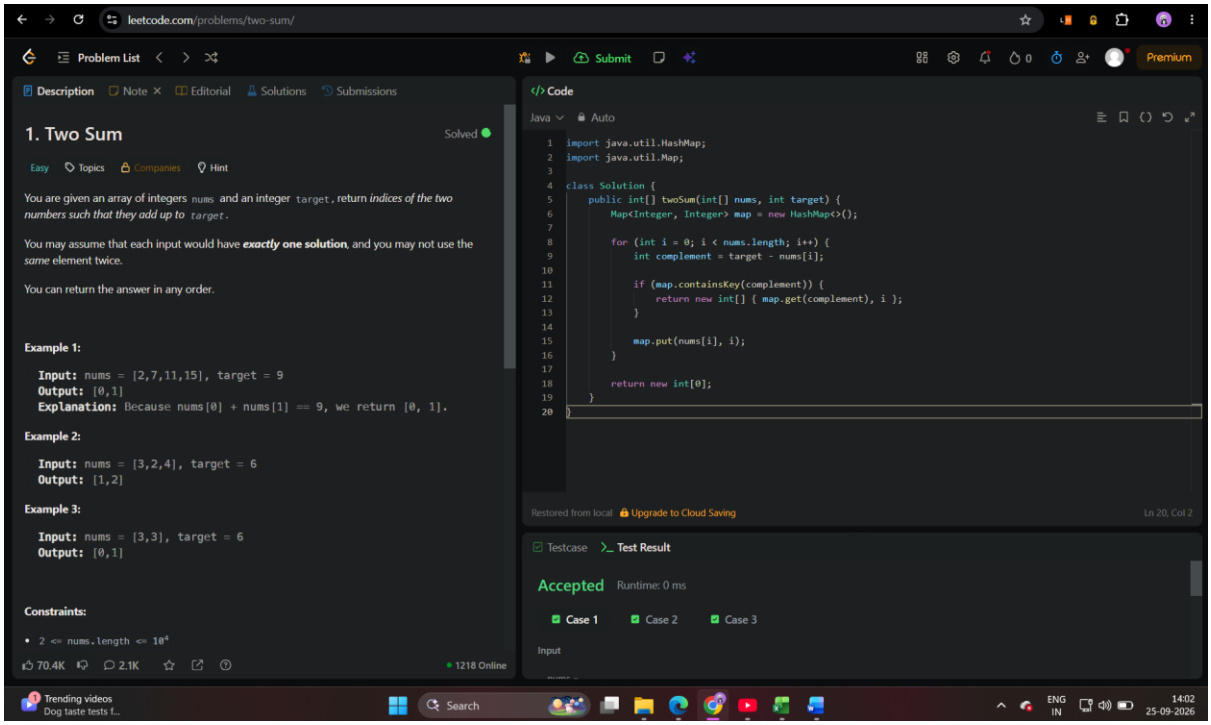
35


leetcode.com/problems/squares-of-a-sorted-array/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
977. Squares of a Sorted Array
Easy
Topics
Companies
Given an integer array nums sorted in non-decreasing order, return an array of the squares of each number sorted in non-decreasing order.
Example 1:
Input: nums = [-4,-1,0,3,10]
Output: [0,1,9,16,100]
Explanation: After squaring, the array becomes [16,1,0,9,100].
After sorting, it becomes [0,1,9,16,100].
Example 2:
Input: nums = [-7,-3,2,3,11]
Output: [4,9,9,49,121]
Constraints:
1 <= nums.length <= 10^4
-10^4 <= nums[i] <= 10^4
nums is sorted in non-decreasing order.
Follow up: Squaring each element and sorting the new array is very trivial, could you find an O(n) solution using a different approach?
10.5K
202
72 Online
Code
Java
Auto
class Solution {
public int[] sortedSquares(int[] nums) {
int n = nums.length;
int[] result = new int[n];
int left = 0;
int right = n - 1;
int idx = n - 1;
while (left <= right) {
int leftSquare = nums[left] * nums[left];
int rightSquare = nums[right] * nums[right];
if (leftSquare > rightSquare) {
result[idx] = leftSquare;
left++;
} else {
result[idx] = rightSquare;
right--;
}
idx--;
}
return result;
}
Saved
Ln 24, Col 23
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
30°C
Mostly sunny
Search
ENG
IN
13:52
25-09-2026

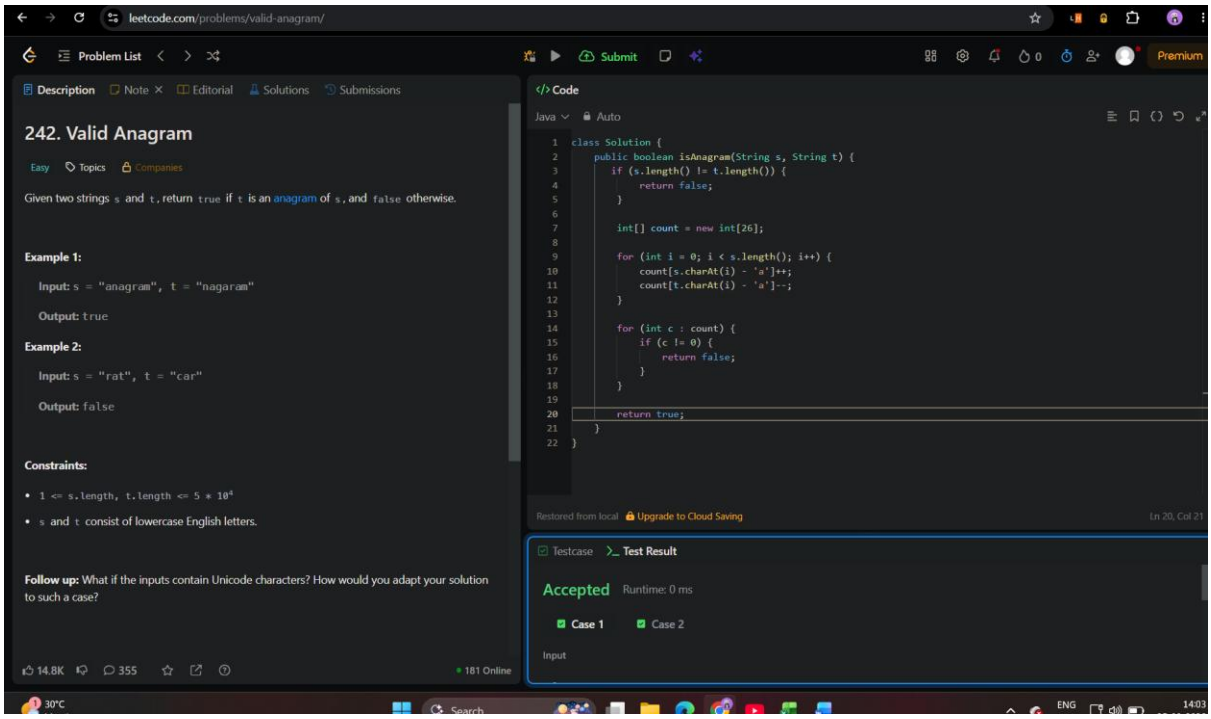
36


leetcode.com/problems/subtree-of-another-tree/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
572. Subtree of Another Tree
Easy
Topics
Companies
Hint
Given the roots of two binary trees root and subRoot, return true if there is a subtree of root with the same structure and node values of subRoot and false otherwise.
A subtree of a binary tree tree is a tree that consists of a node in tree and all of this node's descendants. The tree tree could also be considered as a subtree of itself.
Example 1:
root
subRoot
3
4
5
1
2
4
1
2
9.1K
228
31 Online
Code
Java
Auto
class Solution {
public boolean isSubtree(TreeNode root, TreeNode subRoot) {
if (root == null) {
return false;
}
// Check if the tree rooted at the current node matches subRoot
if (isSameTree(root, subRoot)) {
return true;
}
// Otherwise, recursively check left and right subtrees
return isSubtree(root.left, subRoot) || isSubtree(root.right, subRoot);
}
private boolean isSameTree(TreeNode p, TreeNode q) {
if (p == null && q == null) {
return true;
}
if (p == null || q == null || p.val != q.val) {
return false;
}
return isSameTree(p.left, q.left) && isSameTree(p.right, q.right);
}
}
Saved
Ln 38, Col 75
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
30°C
Mostly sunny
Search
ENG
IN
14:01
25-09-2026

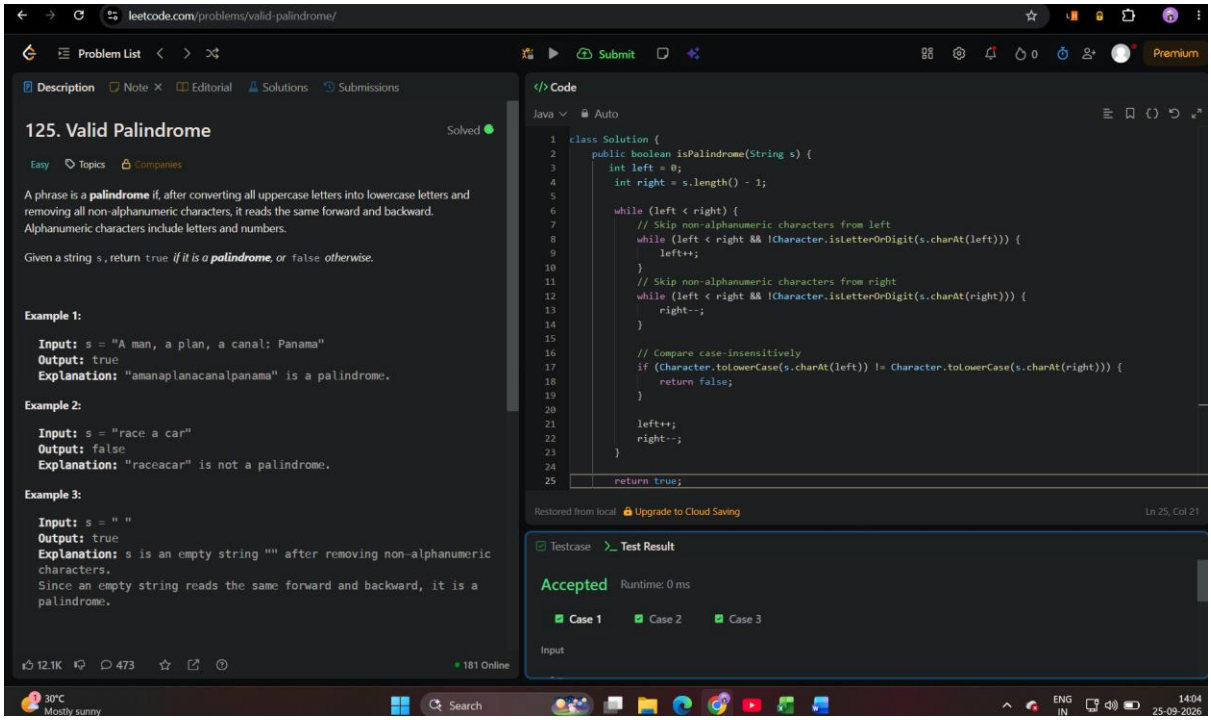
37


leetcode.com/problems/two-sum/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
1. Two Sum
Solved
Easy
Topics
Companies
Hint
You are given an array of integers nums and an integer target, return indices of the two numbers such that they add up to target.
You may assume that each input would have exactly one solution, and you may not use the same element twice.
You can return the answer in any order.
Example 1:
Input: nums = [2,7,11,15], target = 9
Output: [0,1]
Explanation: Because nums[0] + nums[1] == 9, we return [0, 1].
Example 2:
Input: nums = [3,2,4], target = 6
Output: [1,2]
Example 3:
Input: nums = [3,3], target = 6
Output: [0,1]
Constraints:
2 <= nums.length <= 10^4
70.4K
2.1K
1218 Online
Code
Java
Auto
import java.util.HashMap;
import java.util.Map;
class Solution {
public int[] twoSum(int[] nums, int target) {
Map<Integer, Integer> map = new HashMap<>();
for (int i = 0; i < nums.length; i++) {
int complement = target - nums[i];
if (map.containsKey(complement)) {
return new int[] { map.get(complement), i };
}
map.put(nums[i], i);
}
return new int[0];
}
}
Restored from local
Upgrade to Cloud Saving
Ln 20, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
Trending videos
Dog taste tests f...
Search
ENG
IN
14:02
25-09-2026

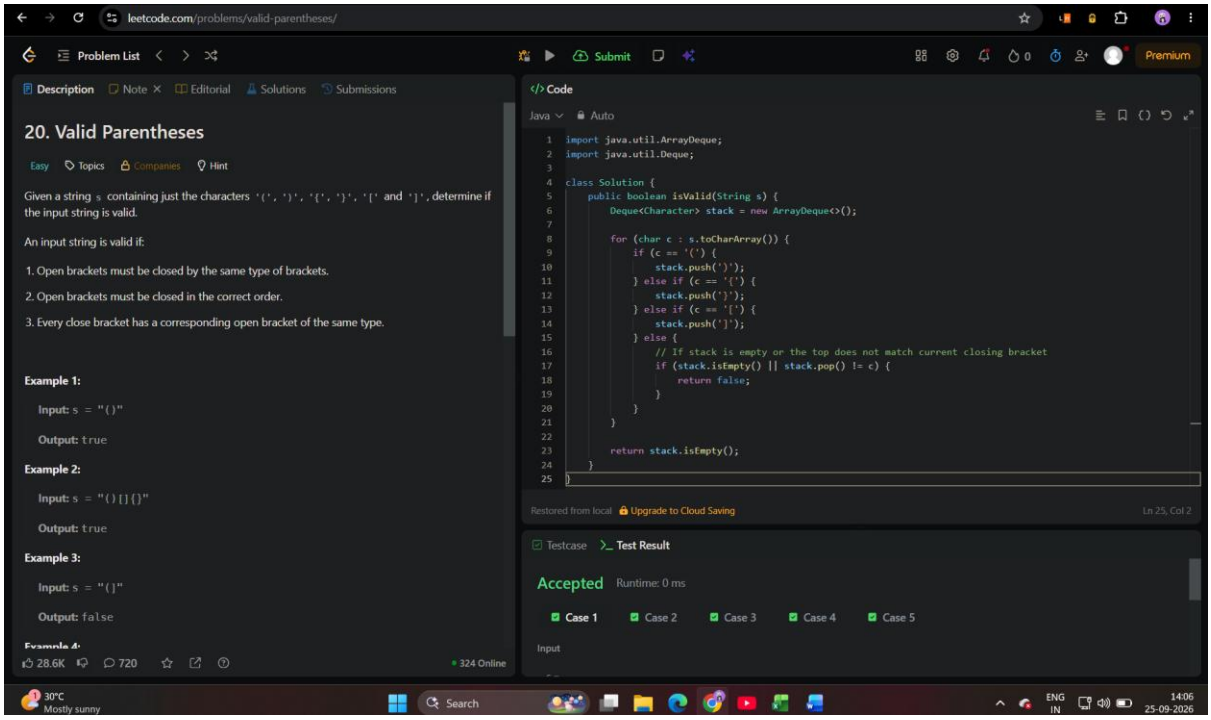
38


leetcode.com/problems/valid-anagram/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
242. Valid Anagram
Easy
Topics
Companies
Given two strings s and t, return true if t is an anagram of s, and false otherwise.
Example 1:
Input: s = "anagram", t = "nagaram"
Output: true
Example 2:
Input: s = "rat", t = "car"
Output: false
Constraints:
1 <= s.length, t.length <= 5 * 10^4
s and t consist of lowercase English letters.
Follow up: What if the inputs contain Unicode characters? How would you adapt your solution to such a case?
14.8K
355
181 Online
Code
Java
Auto
class Solution {
public boolean isAnagram(String s, String t) {
if (s.length() != t.length()) {
return false;
}
int[] count = new int[26];
for (int i = 0; i < s.length(); i++) {
count[s.charAt(i) - 'a']++;
count[t.charAt(i) - 'a']--;
}
for (int c : count) {
if (c != 0) {
return false;
}
}
return true;
}
}
Restored from local
Upgrade to Cloud Saving
Ln 20, Col 21
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
30°C
Search
ENG
14:03

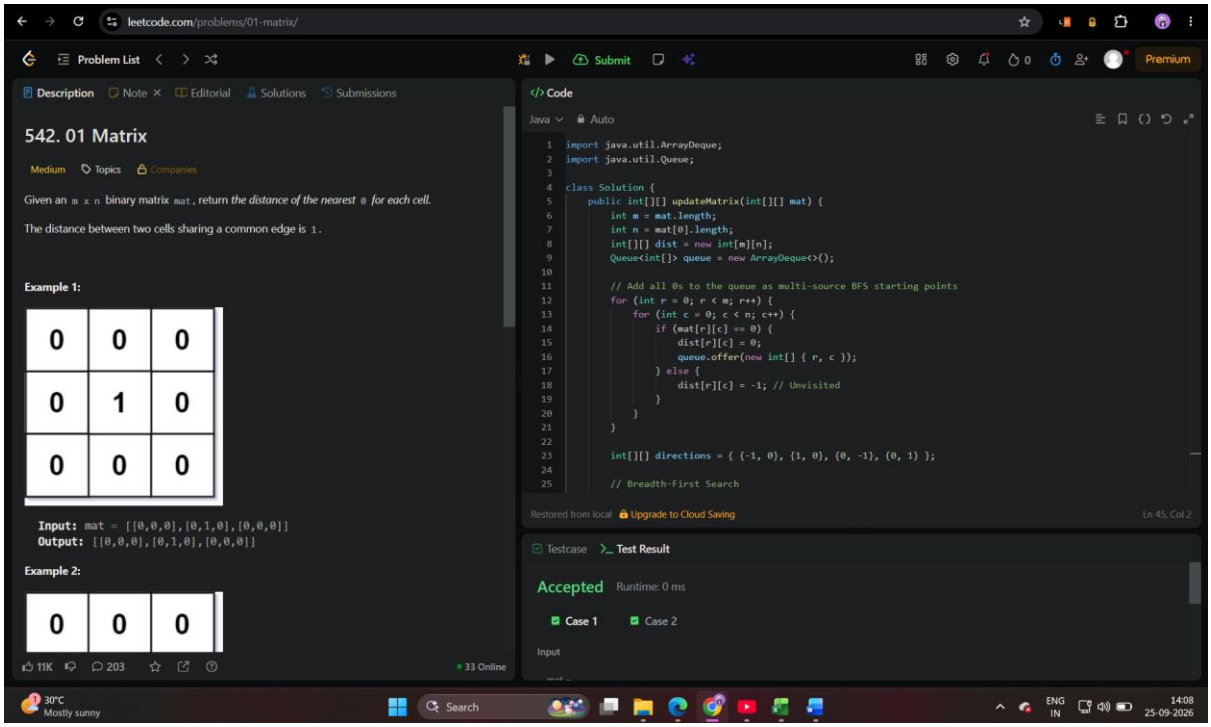
39


leetcode.com/problems/valid-palindrome/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
125. Valid Palindrome
Solved
Easy
Topics
Companies
A phrase is a palindrome if, after converting all uppercase letters into lowercase letters and removing all non-alphanumeric characters, it reads the same forward and backward. Alphanumeric characters include letters and numbers.
Given a string s, return true if it is a palindrome, or false otherwise.
Example 1:
Input: s = "A man, a plan, a canal: Panama"
Output: true
Explanation: "amanaplanacanalpanama" is a palindrome.
Example 2:
Input: s = "race a car"
Output: false
Explanation: "raceacar" is not a palindrome.
Example 3:
Input: s = " "
Output: true
Explanation: s is an empty string "" after removing non-alphanumeric characters.
Since an empty string reads the same forward and backward, it is a palindrome.
12.1K
473
181 Online
Code
Java
Auto
class Solution {
public boolean isPalindrome(String s) {
int left = 0;
int right = s.length() - 1;
while (left < right) {
// Skip non-alphanumeric characters from left
while (left < right && !Character.isLetterOrDigit(s.charAt(left))) {
left++;
}
// Skip non-alphanumeric characters from right
while (left < right && !Character.isLetterOrDigit(s.charAt(right))) {
right--;
}
// Compare case-insensitively
if (Character.toLowerCase(s.charAt(left)) != Character.toLowerCase(s.charAt(right))) {
return false;
}
left++;
right--;
}
return true;
Restored from local
Upgrade to Cloud Saving
Ln 25, Col 21
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
30°C
Mostly sunny
Search
ENG
IN
14:04
25-09-2026

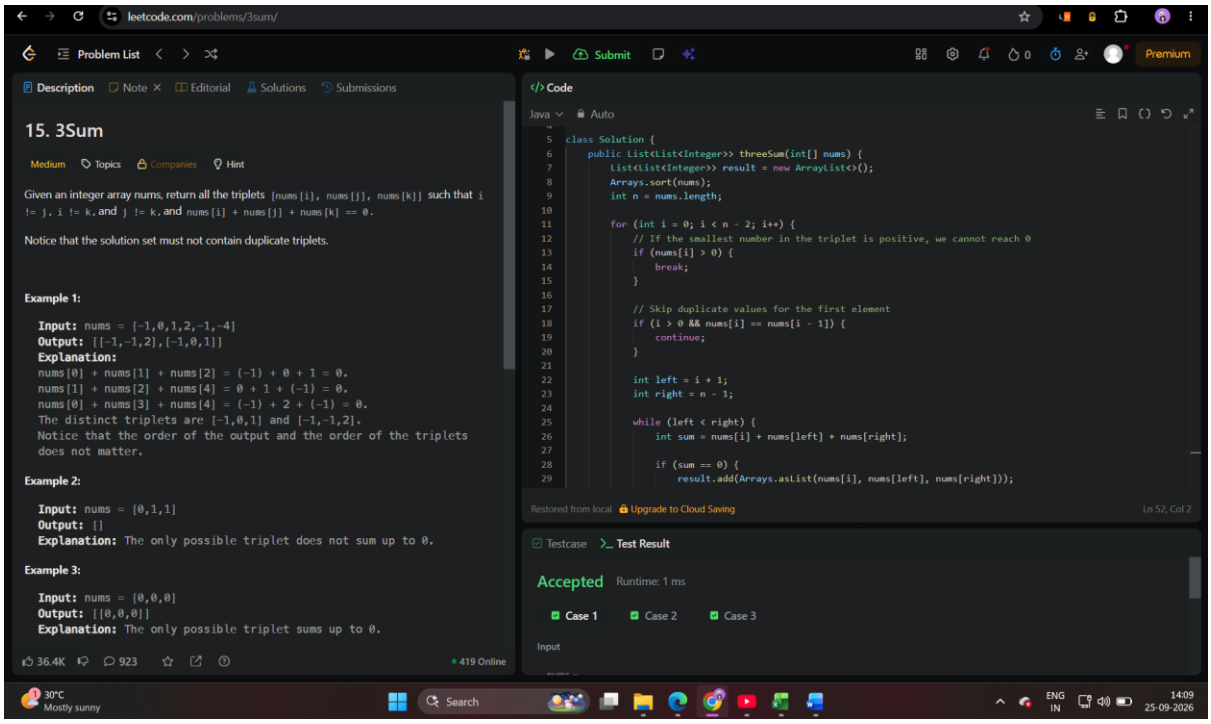
40


leetcode.com/problems/valid-parentheses/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
20. Valid Parentheses
Easy
Topics
Companies
Hint
Given a string s containing just the characters '(', ')', '{', '}', '[' and ']', determine if the input string is valid.
An input string is valid if:
1. Open brackets must be closed by the same type of brackets.
2. Open brackets must be closed in the correct order.
3. Every close bracket has a corresponding open bracket of the same type.
Example 1:
Input: s = "()"
Output: true
Example 2:
Input: s = "()[]{}"
Output: true
Example 3:
Input: s = "(]"
Output: false
28.6K
720
324 Online
Code
Java
Auto
import java.util.ArrayDeque;
import java.util.Deque;
class Solution {
public boolean isValid(String s) {
Deque<Character> stack = new ArrayDeque<>();
for (char c : s.toCharArray()) {
if (c == '(') {
stack.push(')');
} else if (c == '{') {
stack.push('}');
} else if (c == '[') {
stack.push(']');
} else {
// If stack is empty or the top does not match current closing bracket
if (stack.isEmpty() || stack.pop() != c) {
return false;
}
}
}
return stack.isEmpty();
}
}
Restored from local
Upgrade to Cloud Saving
Ln 25, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Case 4
Case 5
Input
30°C
Mostly sunny
Search
ENG
IN
14:06
25-09-2026

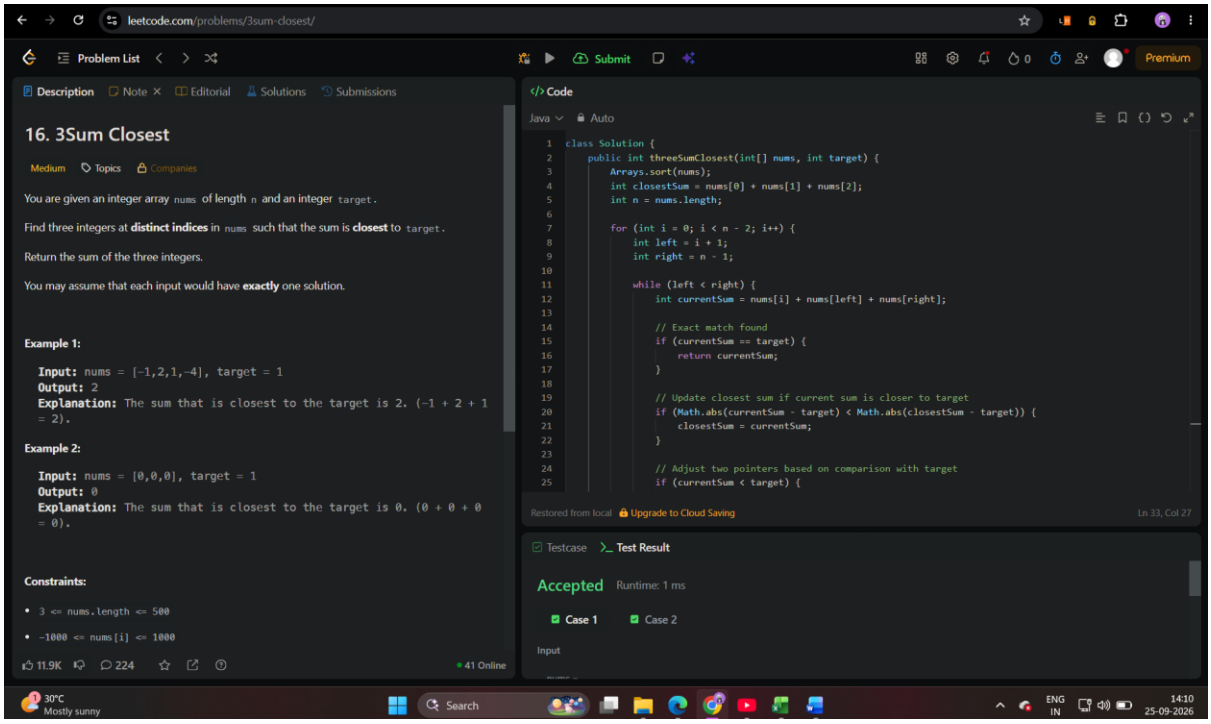
41


leetcode.com/problems/01-matrix/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
542. 01 Matrix
Medium
Topics
Companies
Given an m x n binary matrix mat, return the distance of the nearest 0 for each cell.
The distance between two cells sharing a common edge is 1.
Example 1:
0 0 0
0 1 0
0 0 0
Input: mat = [[0,0,0],[0,1,0],[0,0,0]]
Output: [[0,0,0],[0,1,0],[0,0,0]]
Example 2:
0 0 0
11K
203
33 Online
Code
Java
Auto
import java.util.ArrayDeque;
import java.util.Queue;
class Solution {
public int[][] updateMatrix(int[][] mat) {
int m = mat.length;
int n = mat[0].length;
int[][] dist = new int[m][n];
Queue<int[]> queue = new ArrayDeque<>();
// Add all 0s to the queue as multi-source BFS starting points
for (int r = 0; r < m; r++) {
for (int c = 0; c < n; c++) {
if (mat[r][c] == 0) {
dist[r][c] = 0;
queue.offer(new int[] { r, c });
} else {
dist[r][c] = -1; // Unvisited
}
}
}
int[][] directions = { {-1, 0}, {1, 0}, {0, -1}, {0, 1} };
// Breadth-First Search
Restored from local
Upgrade to Cloud Saving
Ln 45, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
30°C
Mostly sunny
Search
ENG
IN
14:08
25-09-2026

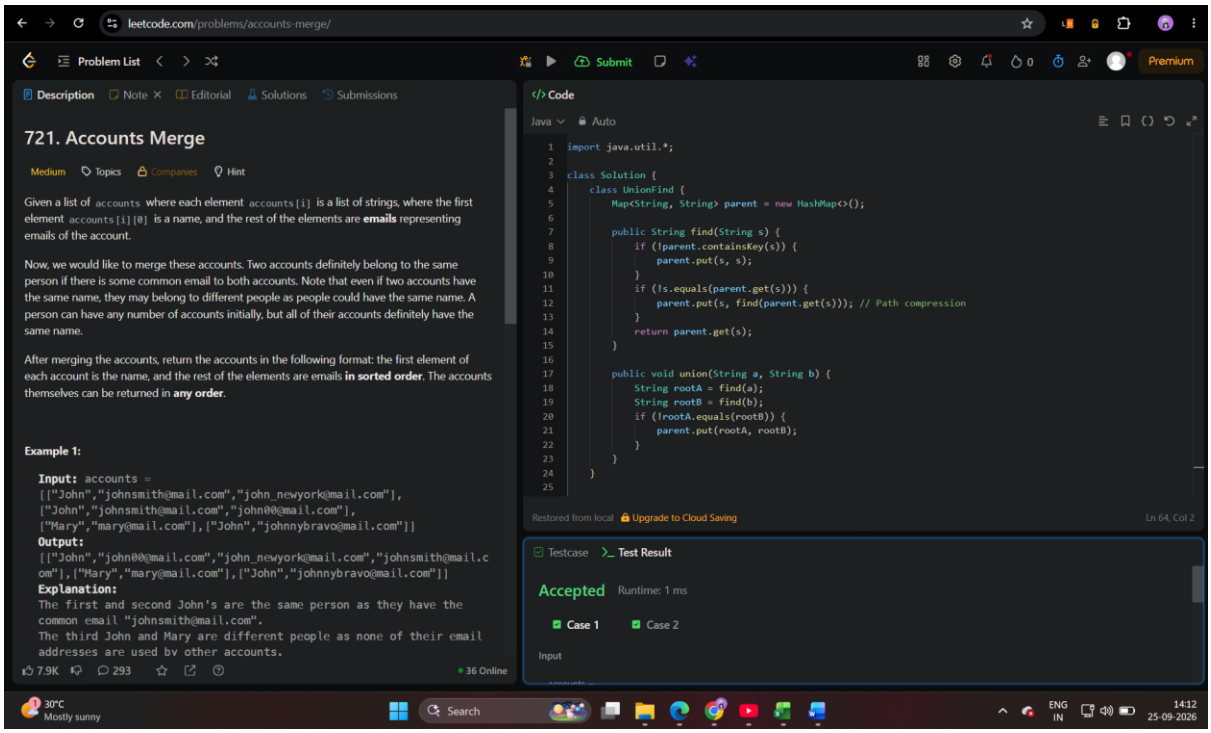
42


leetcode.com/problems/3sum/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
15. 3Sum
Medium
Topics
Companies
Hint
Given an integer array nums, return all the triplets [nums[i], nums[j], nums[k]] such that i != j, i != k, and j != k, and nums[i] + nums[j] + nums[k] == 0.
Notice that the solution set must not contain duplicate triplets.
Example 1:
Input: nums = [-1,0,1,2,-1,-4]
Output: [[-1,-1,2],[-1,0,1]]
Explanation:
nums[0] + nums[1] + nums[2] = (-1) + 0 + 1 = 0.
nums[1] + nums[2] + nums[4] = 0 + 1 + (-1) = 0.
nums[0] + nums[3] + nums[4] = (-1) + 2 + (-1) = 0.
The distinct triplets are [-1,0,1] and [-1,-1,2].
Notice that the order of the output and the order of the triplets does not matter.
Example 2:
Input: nums = [0,1,1]
Output: []
Explanation: The only possible triplet does not sum up to 0.
Example 3:
Input: nums = [0,0,0]
Output: [[0,0,0]]
Explanation: The only possible triplet sums up to 0.
36.4K
923
419 Online
Code
Java
Auto
class Solution {
public List<List<Integer>> threeSum(int[] nums) {
List<List<Integer>> result = new ArrayList<>();
Arrays.sort(nums);
int n = nums.length;
for (int i = 0; i < n - 2; i++) {
// If the smallest number in the triplet is positive, we cannot reach 0
if (nums[i] > 0) {
break;
}
// Skip duplicate values for the first element
if (i > 0 && nums[i] == nums[i - 1]) {
continue;
}
int left = i + 1;
int right = n - 1;
while (left < right) {
int sum = nums[i] + nums[left] + nums[right];
if (sum == 0) {
result.add(Arrays.asList(nums[i], nums[left], nums[right]));
Restored from local
Upgrade to Cloud Saving
Ln 52, Col 2
Testcase
Test Result
Accepted
Runtime: 1 ms
Case 1
Case 2
Case 3
Input
30°C
Mostly sunny
Search
ENG
IN
14:09
25-09-2026

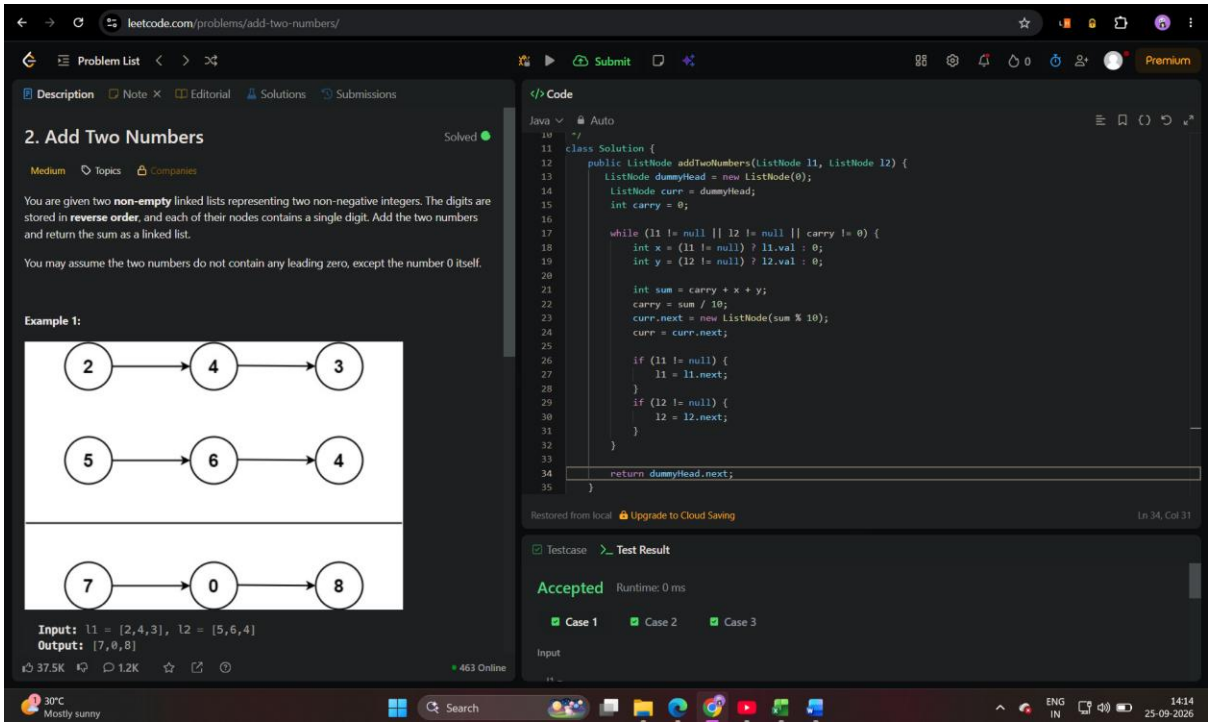
43


leetcode.com/problems/3sum-closest/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
16. 3Sum Closest
Medium
Topics
Companies
You are given an integer array nums of length n and an integer target.
Find three integers at distinct indices in nums such that the sum is closest to target.
Return the sum of the three integers.
You may assume that each input would have exactly one solution.
Example 1:
Input: nums = [-1,2,1,-4], target = 1
Output: 2
Explanation: The sum that is closest to the target is 2. (-1 + 2 + 1 = 2).
Example 2:
Input: nums = [0,0,0], target = 1
Output: 0
Explanation: The sum that is closest to the target is 0. (0 + 0 + 0 = 0).
Constraints:
3 <= nums.length <= 500
-1000 <= nums[i] <= 1000
11.9K
224
41 Online
Code
Java
Auto
class Solution {
public int threeSumClosest(int[] nums, int target) {
Arrays.sort(nums);
int closestSum = nums[0] + nums[1] + nums[2];
int n = nums.length;
for (int i = 0; i < n - 2; i++) {
int left = i + 1;
int right = n - 1;
while (left < right) {
int currentSum = nums[i] + nums[left] + nums[right];
// Exact match found
if (currentSum == target) {
return currentSum;
}
// Update closest sum if current sum is closer to target
if (Math.abs(currentSum - target) < Math.abs(closestSum - target)) {
closestSum = currentSum;
}
// Adjust two pointers based on comparison with target
if (currentSum < target) {
Restored from local
Upgrade to Cloud Saving
Ln 33, Col 27
Testcase
Test Result
Accepted
Runtime: 1 ms
Case 1
Case 2
Input
30°C
Mostly sunny
Search
ENG
IN
14:10
25-09-2026

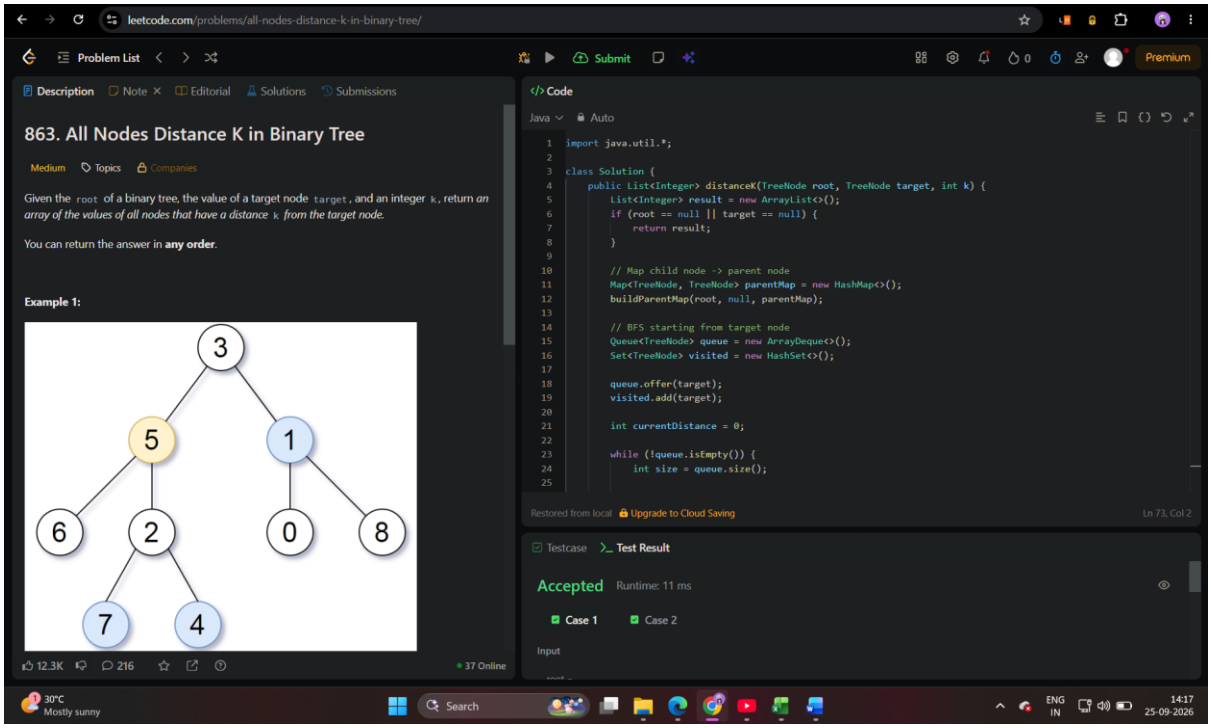
44


leetcode.com/problems/accounts-merge/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
721. Accounts Merge
Medium
Topics
Companies
Hint
Given a list of accounts where each element accounts[i] is a list of strings, where the first element accounts[i][0] is a name, and the rest of the elements are emails representing emails of the account.
Now, we would like to merge these accounts. Two accounts definitely belong to the same person if there is some common email to both accounts. Note that even if two accounts have the same name, they may belong to different people as people could have the same name. A person can have any number of accounts initially, but all of their accounts definitely have the same name.
After merging the accounts, return the accounts in the following format: the first element of each account is the name, and the rest of the elements are emails in sorted order. The accounts themselves can be returned in any order.
Example 1:
Input: accounts = [["John","johnsmith@mail.com","john_newyork@mail.com"],["John","johnsmith@mail.com","john00@mail.com"],["Mary","mary@mail.com"],["John","johnnybravo@mail.com"]]
Output: [["John","john00@mail.com","john_newyork@mail.com","johnsmith@mail.com"],["Mary","mary@mail.com"],["John","johnnybravo@mail.com"]]
Explanation:
The first and second John's are the same person as they have the common email "johnsmith@mail.com".
The third John and Mary are different people as none of their email addresses are used by other accounts.
7.9K
293
36 Online
Code
Java
Auto
import java.util.*;
class Solution {
class UnionFind {
Map<String, String> parent = new HashMap<>();
public String find(String s) {
if (!parent.containsKey(s)) {
parent.put(s, s);
}
if (!s.equals(parent.get(s))) {
parent.put(s, find(parent.get(s))); // Path compression
}
return parent.get(s);
}
public void union(String a, String b) {
String rootA = find(a);
String rootB = find(b);
if (!rootA.equals(rootB)) {
parent.put(rootA, rootB);
}
}
}
Restored from local
Upgrade to Cloud Saving
Ln 64, Col 2
Testcase
Test Result
Accepted
Runtime: 1 ms
Case 1
Case 2
Input
30°C
Mostly sunny
Search
ENG
IN
14:12
25-09-2026

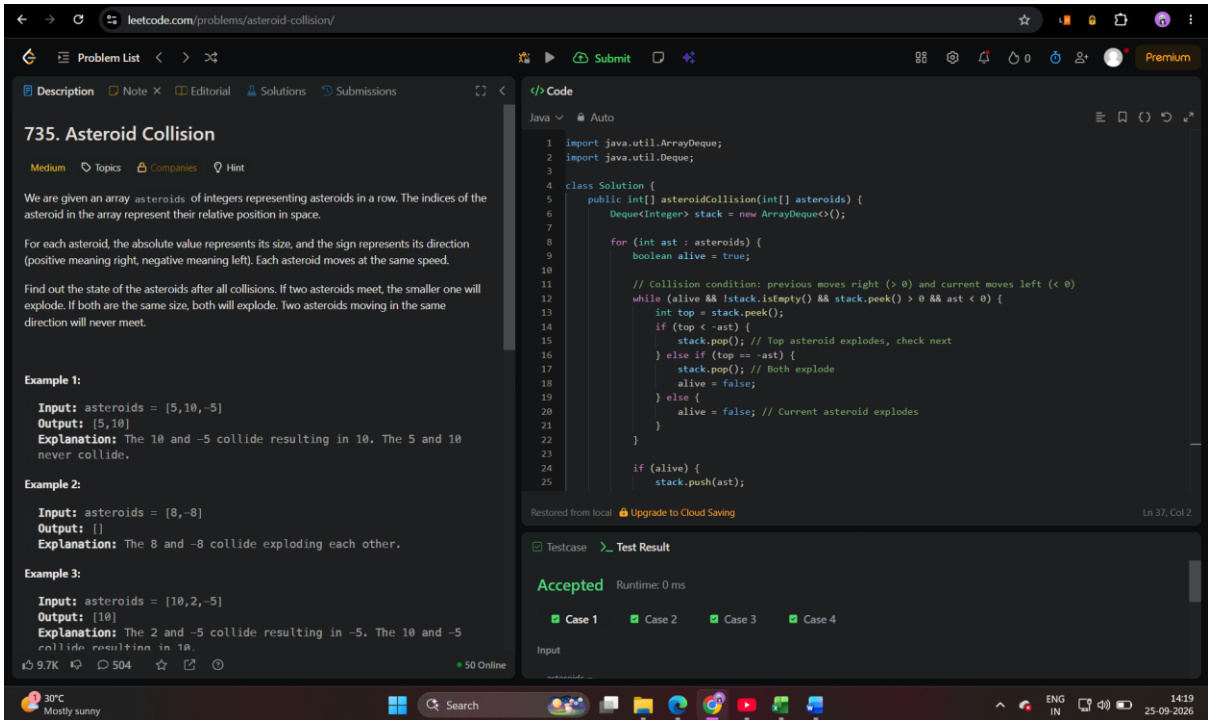
45


leetcode.com/problems/add-two-numbers/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
2. Add Two Numbers
Solved
Medium
Topics
Companies
You are given two non-empty linked lists representing two non-negative integers. The digits are stored in reverse order, and each of their nodes contains a single digit. Add the two numbers and return the sum as a linked list.
You may assume the two numbers do not contain any leading zero, except the number 0 itself.
Example 1:
Input: l1 = [2,4,3], l2 = [5,6,4]
Output: [7,0,8]
37.5K
1.2K
463 Online
Code
Java
Auto
class Solution {
public ListNode addTwoNumbers(ListNode l1, ListNode l2) {
ListNode dummyHead = new ListNode(0);
ListNode curr = dummyHead;
int carry = 0;
while (l1 != null || l2 != null || carry != 0) {
int x = (l1 != null) ? l1.val : 0;
int y = (l2 != null) ? l2.val : 0;
int sum = carry + x + y;
carry = sum / 10;
curr.next = new ListNode(sum % 10);
curr = curr.next;
if (l1 != null) {
l1 = l1.next;
}
if (l2 != null) {
l2 = l2.next;
}
}
return dummyHead.next;
}
Restored from local
Upgrade to Cloud Saving
Ln 34, Col 31
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
30°C
Mostly sunny
Search
ENG
IN
14:14
25-09-2026

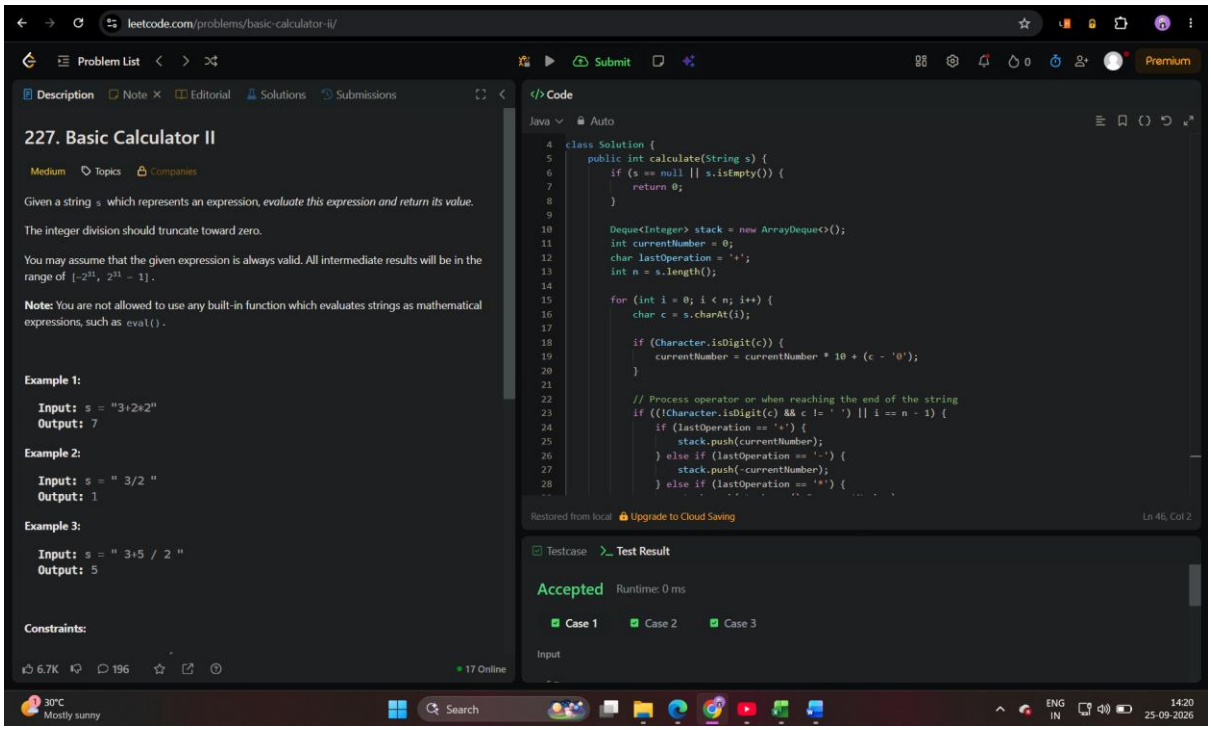
46


leetcode.com/problems/all-nodes-distance-k-in-binary-tree/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
863. All Nodes Distance K in Binary Tree
Medium
Topics
Companies
Given the root of a binary tree, the value of a target node target, and an integer k, return an array of the values of all nodes that have a distance k from the target node.
You can return the answer in any order.
Example 1:
12.3K
216
37 Online
Code
Java
Auto
import java.util.*;
class Solution {
public List<Integer> distanceK(TreeNode root, TreeNode target, int k) {
List<Integer> result = new ArrayList<>();
if (root == null || target == null) {
return result;
}
// Map child node -> parent node
Map<TreeNode, TreeNode> parentMap = new HashMap<>();
buildParentMap(root, null, parentMap);
// BFS starting from target node
Queue<TreeNode> queue = new ArrayDeque<>();
Set<TreeNode> visited = new HashSet<>();
queue.offer(target);
visited.add(target);
int currentDistance = 0;
while (!queue.isEmpty()) {
int size = queue.size();
Restored from local
Upgrade to Cloud Saving
Ln 73, Col 2
Testcase
Test Result
Accepted
Runtime: 11 ms
Case 1
Case 2
Input
30°C
Mostly sunny
Search
ENG
IN
14:17
25-09-2026

47


leetcode.com/problems/asteroid-collision/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
735. Asteroid Collision
Medium
Topics
Companies
Hint
We are given an array asteroids of integers representing asteroids in a row. The indices of the asteroid in the array represent their relative position in space.
For each asteroid, the absolute value represents its size, and the sign represents its direction (positive meaning right, negative meaning left). Each asteroid moves at the same speed.
Find out the state of the asteroids after all collisions. If two asteroids meet, the smaller one will explode. If both are the same size, both will explode. Two asteroids moving in the same direction will never meet.
Example 1:
Input: asteroids = [5,10,-5]
Output: [5,10]
Explanation: The 10 and -5 collide resulting in 10. The 5 and 10 never collide.
Example 2:
Input: asteroids = [8,-8]
Output: []
Explanation: The 8 and -8 collide exploding each other.
Example 3:
Input: asteroids = [10,2,-5]
Output: [10]
Explanation: The 2 and -5 collide resulting in -5. The 10 and -5
9.7K
504
50 Online
Code
Java
Auto
import java.util.ArrayDeque;
import java.util.Deque;
class Solution {
public int[] asteroidCollision(int[] asteroids) {
Deque<Integer> stack = new ArrayDeque<>();
for (int ast : asteroids) {
boolean alive = true;
// Collision condition: previous moves right (> 0) and current moves left (< 0)
while (alive && !stack.isEmpty() && stack.peek() > 0 && ast < 0) {
int top = stack.peek();
if (top < -ast) {
stack.pop(); // Top asteroid explodes, check next
} else if (top == -ast) {
stack.pop(); // Both explode
alive = false;
} else {
alive = false; // Current asteroid explodes
}
}
if (alive) {
stack.push(ast);
Restored from local
Upgrade to Cloud Saving
Ln 37, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Case 4
Input
30°C
Mostly sunny
Search
ENG
IN
14:19
25-09-2026

48


leetcode.com/problems/basic-calculator-ii/
Problem List
Submit
Premium
Description
Note
Editorial
Solutions
Submissions
227. Basic Calculator II
Medium
Topics
Companies
Given a string s which represents an expression, evaluate this expression and return its value.
The integer division should truncate toward zero.
You may assume that the given expression is always valid. All intermediate results will be in the range of [-2^31, 2^31 - 1].
Note: You are not allowed to use any built-in function which evaluates strings as mathematical expressions, such as eval().
Example 1:
Input: s = "3+2*2"
Output: 7
Example 2:
Input: s = " 3/2 "
Output: 1
Example 3:
Input: s = " 3+5 / 2 "
Output: 5
Constraints:
6.7K
196
17 Online
Code
Java
Auto
class Solution {
public int calculate(String s) {
if (s == null || s.isEmpty()) {
return 0;
}
Deque<Integer> stack = new ArrayDeque<>();
int currentNumber = 0;
char lastOperation = '+';
int n = s.length();
for (int i = 0; i < n; i++) {
char c = s.charAt(i);
if (Character.isDigit(c)) {
currentNumber = currentNumber * 10 + (c - '0');
}
// Process operator or when reaching the end of the string
if ((!Character.isDigit(c) && c != ' ') || i == n - 1) {
if (lastOperation == '+') {
stack.push(currentNumber);
} else if (lastOperation == '-') {
stack.push(-currentNumber);
} else if (lastOperation == '*') {
Restored from local
Upgrade to Cloud Saving
Ln 46, Col 2
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
30°C
Mostly sunny
Search
ENG
IN
14:20
25-09-2026

49

leetcode.com/problems/binary-tree-level-order-traversal/

Problem List


Description | Note | Editorial | Solutions | Submissions

102. Binary Tree Level Order Traversal

Medium | Topics | Companies | Hint

Given the `root` of a binary tree, return *the level order traversal of its nodes' values.* (i.e., from left to right, level by level).

Example 1:



Input: root = [3,9,20,null,null,15,7]
Output: [[3],[9,20],[15,7]]

Example 2:

Input: root = [1]
Output: [[1]]

17.4K | 224 | 111 Online

Submit | Premium

Code

Java | Auto

```java
class Solution {
    public List<List<Integer>> levelOrder(TreeNode root) {
        List<List<Integer>> result = new ArrayList<>();
        if (root == null) {
            return result;
        }

        Queue<TreeNode> queue = new ArrayDeque<>();
        queue.offer(root);

        while (!queue.isEmpty()) {
            int levelSize = queue.size();
            List<Integer> currentLevel = new ArrayList<>(levelSize);

            for (int i = 0; i < levelSize; i++) {
                TreeNode curr = queue.poll();
                currentLevel.add(curr.val);

                if (curr.left != null) {
                    queue.offer(curr.left);
                }
                if (curr.right != null) {
                    queue.offer(curr.right);
                }
            }
```

Restored from local | Upgrade to Cloud Saving | Ln 37, Col 2

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

30°C Mostly sunny | Search | ENG IN | 14:26 25-09-2026

50

leetcode.com/problems/binary-tree-right-side-view/

Problem List

Description | Note | Editorial | Solutions | Submissions

199. Binary Tree Right Side View

Medium | Topics | Companies


Given the `root` of a binary tree, imagine yourself standing on the **right side** of it, return *the values of the nodes you can see ordered from top to bottom.*

Example 1:

Input: root = [1,2,3,null,5,null,4]

Output: [1,3,4]

Explanation:



Example 2:

Input: root = [1,2,3,4,null,null,null,5]

Output: [1,3,4,5]

13.7K | 410 | 40 Online

Submit | Premium

Code

Java | Auto

```java
class Solution {
    public List<Integer> rightSideView(TreeNode root) {
        List<Integer> result = new ArrayList<>();
        if (root == null) {
            return result;
        }

        Queue<TreeNode> queue = new ArrayDeque<>();
        queue.offer(root);

        while (!queue.isEmpty()) {
            int levelSize = queue.size();

            for (int i = 0; i < levelSize; i++) {
                TreeNode current = queue.poll();

                // If it is the last element in the current level, it's visible from the right
                if (i == levelSize - 1) {
                    result.add(current.val);
                }

                if (current.left != null) {
                    queue.offer(current.left);
                }
                if (current.right != null) {
```

Restored from local | Upgrade to Cloud Saving | Ln 38, Col 2

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3 | Case 4

Input

30°C Mostly sunny | Search | ENG IN | 14:28 25-09-2026