# Text Mining and Document Intelligence System for News Analytics

Information Retrieval (AIMLCZG537/DSECLZG537) S1-26 - Assignment 2

**Group ID: Gxx**


| # | Registration number | Name |
|---|---|---|
| 1 | 20XXXXXXXXX | Member 1 name |
| 2 | 20XXXXXXXXX | Member 2 name |
| 3 | 20XXXXXXXXX | Member 3 name |
| 4 | 20XXXXXXXXX | Member 4 name |


## 1. Selected business context

*We play the text-mining team of a media-monitoring and business-research firm that must make sense of a continuous stream of news articles.*

Analysts at such a firm (and the communications, investor-relations and policy teams who buy its services) need to:

- **route** each incoming article to the right desk (business, politics, tech, entertainment, sport) - *classification*;
- **discover** topical groupings without waiting for labels - *clustering*;
- **recognise** syndicated or re-published copies so coverage is not counted twice - *duplicate detection*;
- **pull up related coverage** while researching a story - *recommendation*.

The system is a Streamlit application (dashboard, data ingestion, preprocessing configuration, text-mining hub, recommendation panel, performance analytics, inferences) backed by a hand-written Python package.

## 2. Dataset description

*Real BBC News articles: 2,225 documents, 5.03 MB of raw text, five labelled desks, with genuine duplicates and noise.*

- **Source:** BBC News full-text corpus, 2004-2005 (Greene and Cunningham, ICML 2006; mlg.ucd.ie/datasets/bbc.html). The first line of each file is the headline.
- **Structure:** `data/documents.csv` (doc_id, text) holds only text; `data/metadata.csv` (doc_id, title, category, source, period, filename, n_chars, n_words) holds metadata. IDs look like BUS-001.
- **Size:** 5,033,302 characters, 842,910 words; 378.8 words per document on average (median 326, range 84-4,428).
- **Labels:** business 510, entertainment 386, politics 417, sport 511, tech 401 - moderately balanced.
- **Noise:** 2,116 documents contain numbers, 771 currency symbols, 1,921 quotation marks; 15.7% of tokens are capitalised (names, sentence starts).

- **Duplicates:** 137 exact-duplicate pairs plus 26 near-duplicate pairs (cosine >= 0.9); de-duplication removes 162 documents (79 of them tech), leaving 2,063. No duplicate pair crosses categories.

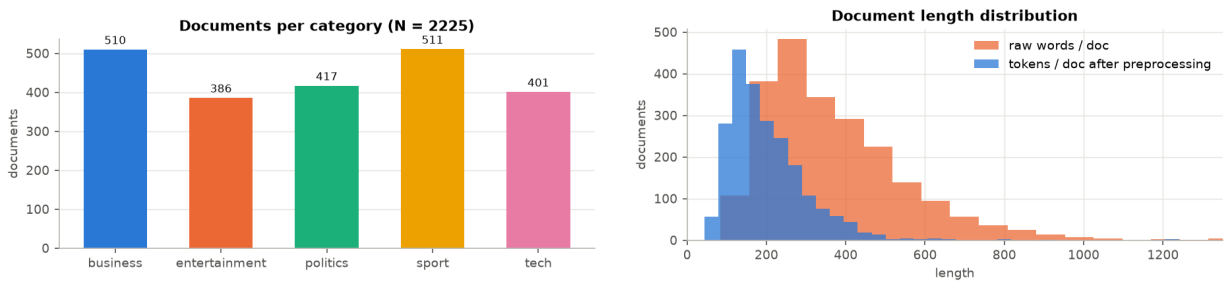



***Figure 1.*** *Left: documents per category. Right: document length before (raw words) and after preprocessing (tokens) - preprocessing roughly halves each document.*

## 3. Implementation approach

*All core IR algorithms are written by hand in the textmining/ package; the Streamlit app and the experiment script call the same code, so the app and this report agree.*

**Pipeline.** ingest (CSV / JSON / ZIP of .txt) -> preprocess -> inverted index -> TF-IDF -> { Naive Bayes | K-Means + Purity/RI | cosine Top-K recommender | duplicate detector } -> Streamlit visualisations. `experiments.py` (seed 42) writes every number in this report to `report/results.json`.

**No built-in implementations.** The inverted index, TF-IDF, cosine similarity, Naive Bayes, K-Means, Purity and Rand Index are hand-implemented; scikit-learn is not used (not even in requirements.txt). numpy serves only as an array container, NLTK only supplies the Porter stemmer, WordNet lemmatiser and stop-word list, and PCA is used only to draw the 2-D scatter plot.

| Component | Formula / procedure |
|---|---|
| TF-IDF (ltc) | `w(t,d) = (1 + log10 tf(t,d)) * log10(N / df_t)` |
| L2 normalisation | `w'(t,d) = w(t,d) / sqrt( sum_t' w(t',d)^2 )` |
| Cosine similarity | `cos(a,b) = a.b / (\|a\| \|b\|) = a.b (rows are unit length)` |
| Multinomial NB | `P(t\|c) = (T_ct + 1) / (sum_t' T_ct' + \|V\|); c* = argmax_c log P(c) + sum_t tf(t,d) log P(t\|c)` |
| K-Means | k-means++ init -> assign each doc to nearest centroid (squared Euclidean) -> centroid = mean of members -> stop when no document moves, max shift < 1e-4, or 100 iterations; best SSE of 5 restarts |
| Purity | `purity = (1/N) sum_k max_j \|w_k AND c_j\|` |
| Rand Index | `RI = (TP + TN) / C(N,2); TP = sum_kj C(n_kj,2), TP+FP = sum_k C(\|w_k\|,2), TP+FN = sum_j C(\|c_j\|,2)` |

***Table 1.*** *Formulas implemented (w_k = cluster k, c_j = class j, C(n,2) = number of pairs).*

**Evaluation protocol.** Naive Bayes uses a stratified 80/20 split (seed 42; 1,781 train / 444 test) and builds its vocabulary from training documents only. Clustering, recommendation and duplicate detection never see labels; labels are used only afterwards to compute Purity, Rand Index and Precision@K.

## 4. Preprocessing and feature choices

*Lowercasing, punctuation/number removal, stop-word removal and Porter stemming cut the vocabulary by 44.1% and the token count by 53.0%, leaving a compact, topical feature space.*

| Cumulative step | Tokens | Vocabulary | Avg tokens / doc |
|---|---|---|---|
| Raw tokens (no normalisation) | 961,301 | 37,981 | 432.0 |
| Lowercase + drop punctuation | 843,375 | 33,096 | 379.0 |
| + drop numbers, min length 2 | 800,959 | 31,133 | 360.0 |
| + stop-word removal | 451,770 | 30,998 | 203.0 |
| + Porter stemming (baseline) | 451,770 | 21,238 | 203.0 |

***Table 2.*** *Effect of each preprocessing step on the full corpus.*

- **Baseline configuration:** markup stripping, lowercasing, regex tokenisation, drop punctuation and numbers, minimum token length 2, NLTK English stop-words, Porter stemming, unigrams. Lemmatisation and n-grams are switchable in the app and are compared in the ablation (Section 9).
- **Stop-words** remove 43.6% of tokens but almost no vocabulary; **stemming** then merges word forms (30,998 -> 21,238 types).
- **TF-IDF features:** ltc weighting with L2 normalisation; terms with df < 2 (9,031 terms) or df > 90% of N are pruned and the 5,000 highest-df terms kept, giving a 2225 x 5000 matrix (2.47% non-zero; every row has norm 1.0).
- **Worked example:** term 'aol' in BUS-001: tf = 7, df = 15, weight 1.8451 x idf 2.1712 = 4.0061, divided by the document length 18.2874 = 0.2191 (identical to the matrix entry).

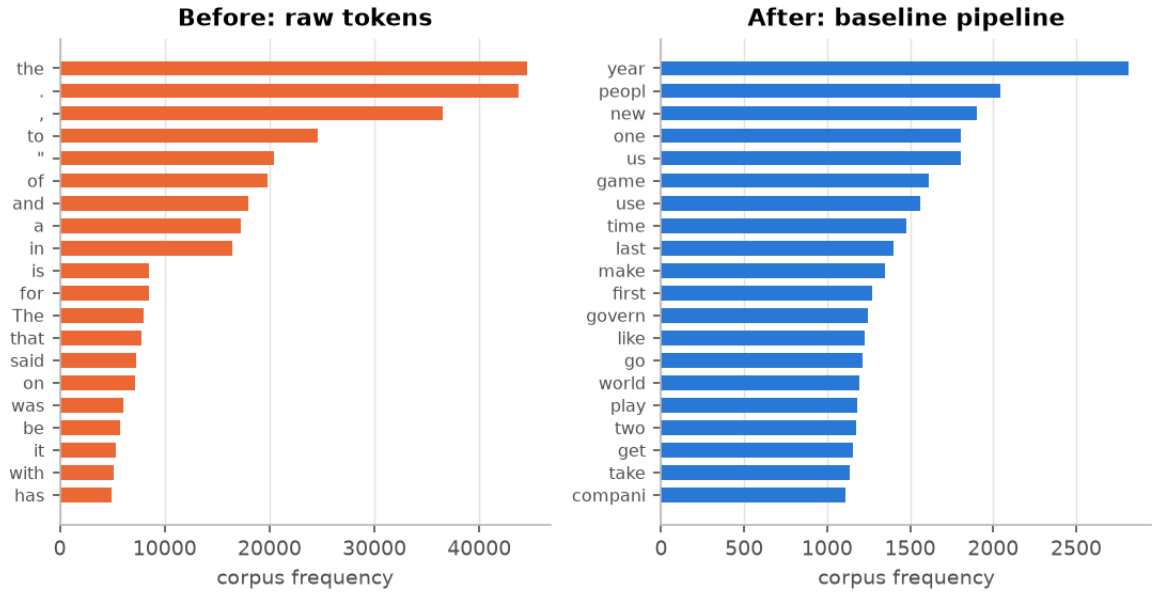



***Figure 2.*** *Top-20 terms before (raw tokens) and after the baseline pipeline: function words and punctuation give way to content stems such as 'year', 'peopl', 'game' and 'govern'.*

## 5. Classification results (Naive Bayes)

*The hand-written multinomial Naive Bayes classifier labels 96.2% of the 444 test articles correctly (427 right, 17 wrong), with macro-F1 0.960.*

| Class | Precision | Recall | F1 | Support |
|---|---|---|---|---|
| business | 0.980 | 0.951 | 0.965 | 102 |
| entertainment | 0.973 | 0.935 | 0.954 | 77 |
| politics | 0.941 | 0.952 | 0.946 | 83 |
| sport | 0.990 | 0.980 | 0.985 | 102 |
| tech | 0.919 | 0.988 | 0.952 | 80 |
| **Accuracy** | | | **0.962** | 444 |
| Macro avg | 0.960 | 0.961 | 0.960 | 444 |
| Weighted avg | 0.963 | 0.962 | 0.962 | 444 |

***Table 3.*** *Per-class and averaged metrics on the held-out test set.*

| doc_id | Title | Actual | Predicted | P(c\|d) |
|---|---|---|---|---|
| BUS-054 | Hyundai to build new India plant | business | business | 1.000 |
| BUS-133 | Salary scandal in Cameroon | business | politics (x) | 0.976 |
| BUS-213 | US bank boss hails 'genius' Smith | business | politics (x) | 1.000 |
| BUS-226 | McDonald's to sponsor MTV show | business | entertainment (x) | 0.999 |
| BUS-315 | S&N; extends Indian beer venture | business | business | 1.000 |
| BUS-384 | Weak end-of-year sales hit Next | business | business | 1.000 |
| ENT-096 | Singer's film to show at festival | entertainment | entertainment | 1.000 |
| ENT-153 | OutKast win at MTV Europe Awards | entertainment | entertainment | 1.000 |

***Table 4.*** *Sample of predicted labels ((x) = misclassified). All 444 predictions are in* `report/nb_test_predictions.csv` *and in the app.*

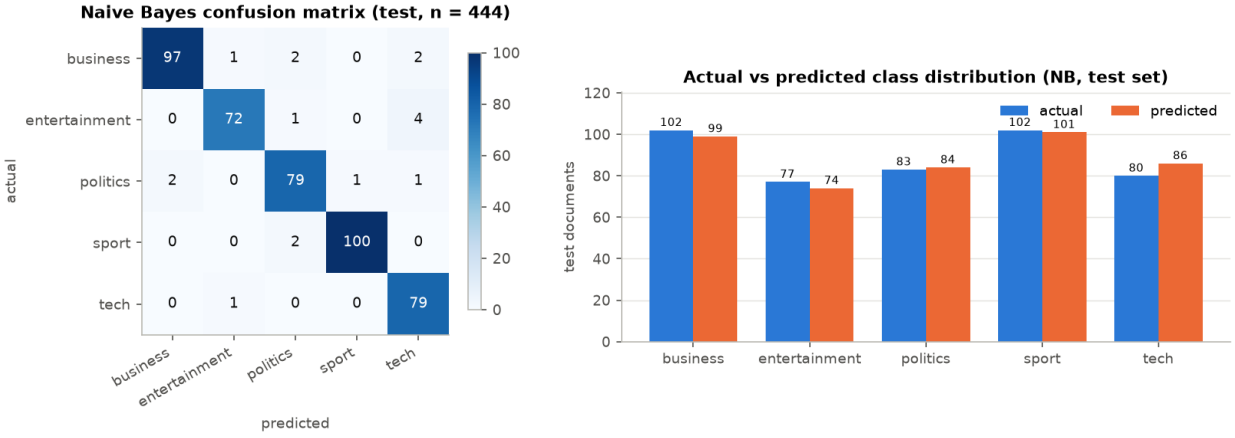



***Figure 3.*** *Left: confusion matrix (rows = actual, columns = predicted). Right: actual vs predicted class distribution.*

Errors are mostly cross-desk stories (e.g. a salary scandal labelled politics, a media company's games deal labelled tech); tech has the lowest precision (0.919) because it attracts 7 false positives. **Leakage note:** 38 test articles have an exact copy in the training set and are all classified correctly (1.000 vs 0.958 on the rest) - see Q2.

## 6. Clustering results (K-Means)

*Hand-written K-Means (k = 5) recovers the five desks without seeing any label: purity 0.967, Rand Index 0.975.*

**Configuration.** k = 5, k-means++ initialisation, 5 restarts (best SSE kept), squared Euclidean distance on L2-normalised TF-IDF rows, tol 0.0001, max 100 iterations, seed 42. The best run stopped because it **no document changed cluster at iteration 31** (final SSE 2072.7656).

| Iteration | Docs moved | Max centroid shift | SSE | Cluster sizes |
|---|---|---|---|---|
| 1 | 2,225 | 0.9598 | 2108.13 | 472 / 406 / 474 / 524 / 349 |
| 2 | 646 | 0.0753 | 2090.82 | 376 / 559 / 376 / 528 / 386 |
| 5 | 44 | 0.0273 | 2084.37 | 357 / 717 / 364 / 500 / 287 |
| 21 | 127 | 0.0488 | 2076.21 | 524 / 448 / 388 / 512 / 353 |
| 28 | 5 | 0.0053 | 2072.78 | 435 / 392 / 387 / 513 / 498 |
| 31 | 0 | 0.0000 | 2072.77 | 432 / 392 / 387 / 513 / 501 |

***Table 5.*** *Condensed iteration log of the best run (31 iterations; the full log is shown in the app). SSE falls monotonically; the late burst around iteration 21 is an oversized cluster being broken up before convergence.*

| Metric | Value | Pair counts | Value |
|---|---|---|---|
| Purity | 0.967 | TP (same cluster, same class) | 470,082 |
| Rand Index | 0.975 | FP (same cluster, different class) | 30,919 |
| SSE | 2072.8 | FN (different cluster, same class) | 31,259 |
| Documents | 2,225 | TN (different cluster, different class) | 1,941,940 |

***Table 6.*** *Clustering evaluation against the true desks.*

**Verification.** The fast contingency-table Rand Index equals a literal O(N^2) pair loop on a 300-document sample (0.9729 vs 0.9729). **Seed stability:** over 5 seeds purity is 0.963 +/- 0.004 with 5 restarts, but ranges 0.782-0.967 with a single initialisation.


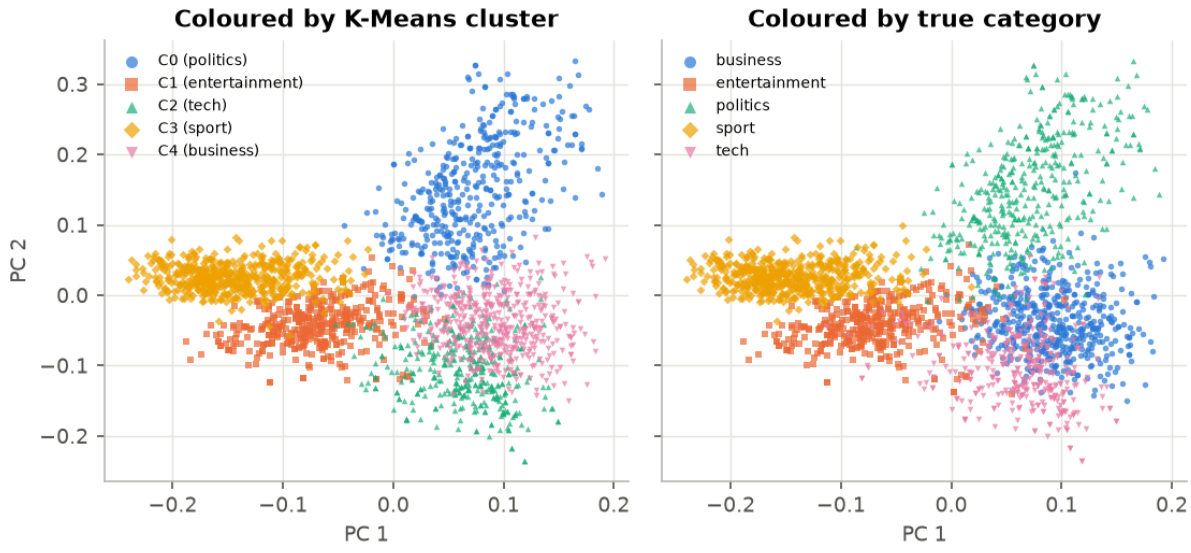



***Figure 4.*** *2-D PCA projection of all documents, coloured by K-Means cluster (left) and by true category (right). PCA is used for display only; clustering runs in the full 5,000-dimensional space.*

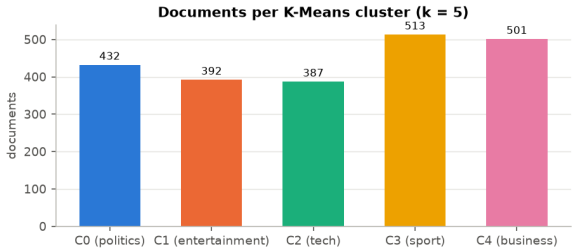


| Cluster | Majority | Size | Share | Top terms |
|---|---|---|---|---|
| C0 | politics | 432 | 94.0% | elect, labour, parti |
| C1 | entertainment | 392 | 95.7% | film, star, award |
| C2 | tech | 387 | 96.4% | user, technolog, use |
| C3 | sport | 513 | 99.2% | game, win, match |
| C4 | business | 501 | 97.4% | market, growth, compani |

***Figure 5.*** *Left: documents per cluster. Right: cluster assignments vs true labels (majority label names the cluster; full membership in* `report/kmeans_membership.csv`*).*

## 7. Comparison of classification and clustering results

*Both methods agree with the editorial desks about 96% of the time, but they answer different questions and their numbers are not directly interchangeable.*

| | Naive Bayes (supervised) | K-Means (unsupervised) |
|---|---|---|
| Uses labels | Yes - trained on 1,781 labelled docs | No - labels only for evaluation |
| Evaluated on | 444 held-out test docs | All 2,225 docs |
| Main metrics | Accuracy 0.962; macro P/R/F1 0.960 / 0.961 / 0.960 | Purity 0.967; Rand Index 0.975 |
| 5-seed mean | Accuracy 0.970 +/- 0.009 | Purity 0.963; RI 0.972 |
| Output | A desk label + posterior for every new article | Unnamed groups; names come from majority labels / top terms |

***Table 7.*** *Naive Bayes vs K-Means.*

Naive Bayes is **supervised**: it learns the desk boundaries from labelled examples and is judged on unseen documents, so its accuracy is a genuine generalisation estimate and it can route new articles directly. K-Means is **unsupervised**: it only groups similar documents, and purity (0.967) equals the accuracy of mapping each cluster to its majority class - computed on the same data that was clustered, after looking at the labels. The Rand Index is inflated by true negatives (78.5% of all pairs are 'different cluster, different class'). K-Means also needs k in advance and several restarts to be stable, whereas NB varies only with the split. That an unsupervised method almost matches the supervised one shows that the five desks are lexically well separated.

## 8. Recommendation results

*Content-based Top-K recommendation by TF-IDF cosine similarity: on average 93.3% of the top-5 results share the query's desk.*

**Approach.** The query (a selected document or free text, preprocessed with the same pipeline) is a TF-IDF vector q; every other document d is scored by `score(q,d) = cos(q,d) = q.d` and the K highest are returned with their metadata and the shared terms that contribute most to the score. Documents with cosine >= 0.9 to the query (near-duplicates) can be hidden.

| # | Score | doc_id | Title | Category | Source | Shared terms |
|---|---|---|---|---|---|---|
| 1 | 0.340 | POL-340 | Lib Dems unveil women's manifesto | politics | BBC News | matern, carer, hewitt, women |
| 2 | 0.292 | POL-128 | Brown shrugs off economy fears | politics | BBC News | matern, prebudget, mother, taxpay |
| 3 | 0.264 | POL-003 | Hewitt decries 'career sexism' | politics | BBC News | matern, hewitt, women, patricia |
| 4 | 0.219 | BUS-382 | Ban on forced retirement under 65 | business | BBC News | hewitt, patricia, commerc, older |
| 5 | 0.200 | POL-390 | Child access law shake-up planned | politics | BBC News | recycl, father, parent, outlin |

***Table 8.*** *Top-5 recommendations for POL-001 'Labour plans maternity pay rise' (politics). Period: 2004-2005 for all.*

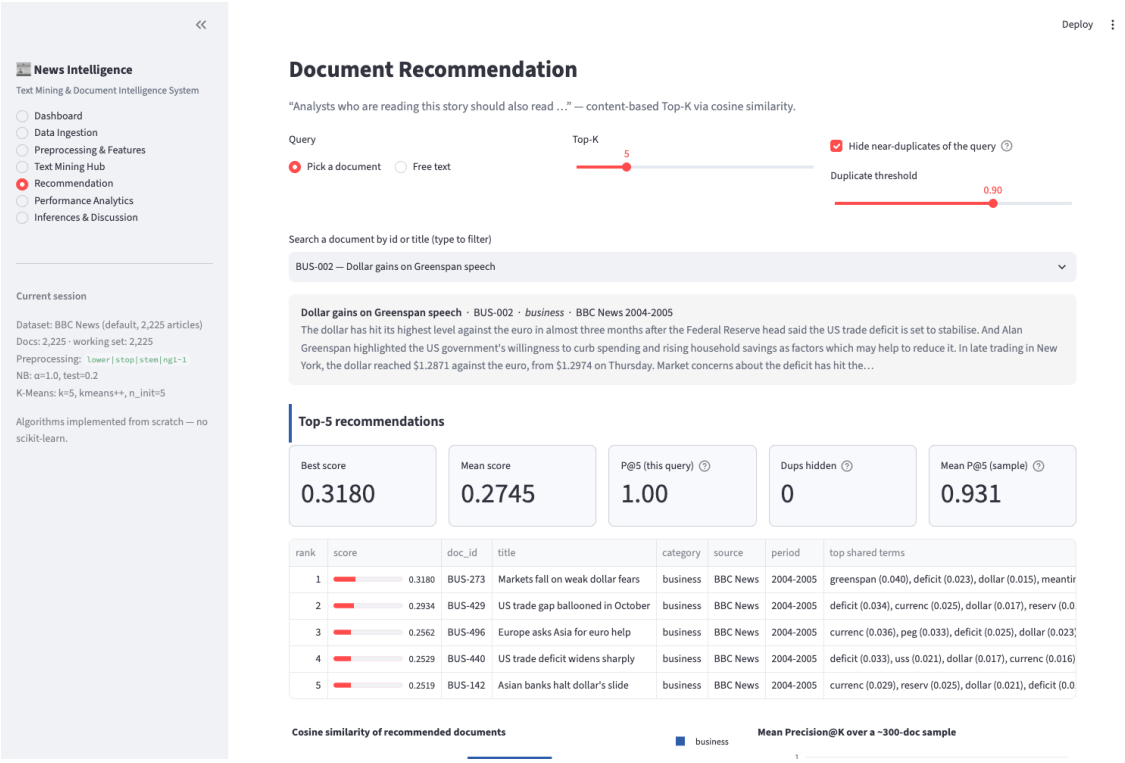



***Figure 6.*** *Recommendation panel of the Streamlit app: query selection, Top-K slider, results with scores, metadata and shared-term explanations.*

**Quality.** Using 'same category' as a relevance proxy, P@5 = 0.933 and P@10 = 0.920 (sport best at 0.986, entertainment lowest at 0.902). A free-text query ('mobile phone operators launch faster broadband and music download services') returns five tech articles led by 'Mobile gig aims to rock 3G' (0.242).

**Findings and limitations.**

- Results are explainable: shared stems such as matern, carer, hewitt show why POL-340 is ranked first; the cross-desk hit BUS-382 is still topically relevant (employment policy), so the category proxy understates quality.
- Duplicates flood lists: 323 documents have a near-copy in their top-5 (e.g. BUS-007's #1 result is a verbatim copy, score 1.000) - hence the hide-duplicates option.
- Bag-of-words cannot match synonyms or paraphrases, and short or generic queries (e.g. TEC-001 on election ink) drift to other desks because a few rare shared words dominate.
- No user interaction data exists, so there is no personalisation, popularity or recency signal.

## 9. Inferences and limitations

*Answers to the five compulsory questions, using the ablation below (each configuration re-runs the full pipeline with and without de-duplication).*

| Configuration | Vocab (raw) | NB acc | NB macro-F1 | Purity (5-seed) | RI (seed 42) | P@5 |
|---|---|---|---|---|---|---|
| Baseline (stop + stem) | 21,238 | 0.962 | 0.960 | 0.959 +/- 0.009 | 0.975 | 0.933 |
| Baseline + dedup | 21,227 | 0.983 | 0.982 | 0.872 +/- 0.074 | 0.886 | 0.917 |
| No stop-word removal | 21,332 | 0.960 | 0.958 | 0.911 +/- 0.087 | 0.975 | 0.936 |
| Lemmatization | 27,572 | 0.966 | 0.965 | 0.915 +/- 0.075 | 0.966 | 0.938 |
| No normalizer | 30,998 | 0.966 | 0.965 | 0.889 +/- 0.085 | 0.962 | 0.936 |
| Uni+bigram | 321,720 | 0.964 | 0.962 | 0.859 +/- 0.079 | 0.965 | 0.946 |
| No lowercasing, no stemming | 35,047 | 0.969 | 0.967 | 0.889 +/- 0.083 | 0.958 | 0.949 |

***Table 9.*** *Ablation. Purity (5-seed) = mean +/- std over 5 seeds with fewer restarts than the main run, so it is slightly below Section 6.*

### Q1. How preprocessing choices affected the results

- **Vocabulary:** the baseline has 21,238 types; dropping stemming raises it to 30,998, lemmatisation gives 27,572, no lowercasing and no stemming 35,047, and bigrams explode it to 321,720. (Disabling lowercasing alone changes nothing because the Porter stemmer lowercases its output.)
- **Classification** is robust: NB accuracy stays within 0.960-0.969, smaller than the spread across random splits (0.970 +/- 0.009). Keeping stop-words is slightly worse (0.960); the benefit of the baseline is a much smaller model.
- **Clustering** is sensitive: the baseline has the highest seed-averaged purity (0.959 +/- 0.009) versus 0.911 without stop-word removal, 0.889 without stemming and 0.859 with bigrams - richer vocabularies spread the 5,000 features over redundant variants and create more local optima.
- **Recommendation** prefers specific features: P@5 rises from 0.933 (baseline) to 0.946 with bigrams and 0.949 with case-sensitive unstemmed tokens, because exact rare-term overlap matters for nearest neighbours. Stop-words + stemming is the best overall compromise.

### Q2. Effect of duplicates and how they were detected and handled

- **Detection:** exact = MD5 of lower-cased, whitespace-collapsed text (137 pairs); near = TF-IDF cosine >= 0.9 confirmed by word 5-shingle Jaccard (26 more pairs, mean Jaccard 0.8867). Union-find merges pairs; 162 redundant documents can be dropped, or just flagged/hidden in the app.
- **Classification:** 38 of 444 test documents have a copy in training and score 1.000 accuracy (vs 0.958) - memorisation, not generalisation. After de-duplication leakage is 0 and accuracy is 0.983 (5 splits: 0.976); only this figure is an honest estimate.
- **Clustering:** copies have distance 0, always share a cluster and add guaranteed TP pairs and double weight to centroids. Removing them made K-Means less stable: seed-42 purity 0.967 -> 0.792; 5-seed mean 0.963 -> 0.927. With 20 restarts it returns to 0.961, so the drop is an optimisation effect.
- **Recommendation:** 323 result lists contain a near-copy, wasting slots and inflating P@5 (0.933 vs 0.931 with duplicates hidden).

### Q3. Recommendation approach: content-based vs collaborative

We use **content-based** recommendation (TF-IDF cosine, Section 8) because the corpus has rich text but no user-document interaction data, so collaborative filtering would have nothing to learn from.

- **Content-based** needs only item content (text, metadata). It works for brand-new articles and new users, is explainable through shared terms, but over-specialises and cannot judge quality. Preferable when the catalogue changes fast (news), users are few, or transparency is required.
- **Collaborative** needs a user-item interaction matrix (reads, clicks, ratings, saves) from many users. It finds non-obvious, co-read items and captures taste, but suffers from cold start and sparsity. Preferable with many active users and a stable catalogue.
- A production system would be **hybrid**: content-based for fresh stories, blended with collaborative signals once analyst reading logs exist.

### Q4. How the techniques help domain experts decide

- **Text mining** quantifies the feed (volume per desk, key vocabulary) and exposes 162 redundant copies (7.3%), so coverage reports count stories, not copies.
- **Classification** routes articles to desks with 96.2% accuracy; low-confidence or cross-desk predictions can go to a human review queue.
- **Clustering** finds groupings without labels (purity 0.967) - useful for an unlabelled client archive or for spotting emerging sub-themes with a larger k.
- **Recommendation** turns any story into a research starting point with explained, de-duplicated related coverage. Together: ingest -> de-duplicate -> route -> explore themes -> brief, with each step measured so analysts know how far to trust it.

### Q5. Naive Bayes vs K-Means: findings, limitations, improvements

NB reaches accuracy 0.962 and macro-F1 0.960 on held-out data; K-Means reaches purity 0.967 and RI 0.975 without labels (5-seed mean purity 0.963). **Key findings:** the desks are lexically well separated; preprocessing changes the feature space more than NB accuracy; duplicates inflate NB accuracy through leakage and inflate P@5; single-seed K-Means results are unreliable without restarts. Limitations and improvements follow.

### Limitations and improvements for real-world deployment

- **Data:** one clean, balanced 2004-05 source with five desks; a live feed is multi-source, multilingual and drifts - retrain periodically and use time-based splits.
- **Features:** bag-of-words ignores synonyms and word order - add LSA or sentence embeddings; use sparse matrices and an approximate nearest-neighbour index to scale beyond tens of thousands of documents.
- **Classification:** NB posteriors are over-confident (~1.0 even on errors) - calibrate or use logistic regression, allow multi-label output, and de-duplicate before splitting.
- **Clustering:** k must be fixed and runs hit local optima - use more restarts, spherical K-Means on cosine, and choose k by silhouette or stability.
- **Recommendation:** same-category is only a relevance proxy - collect analyst judgements; add MinHash-LSH duplicate collapsing, diversity (MMR), recency and collaborative signals.

# 10. Evidence of execution in the BITS Virtual Lab

*Screenshots of the working Streamlit front end launched with `streamlit run app.py`; the recommendation panel is shown in Section 8.*

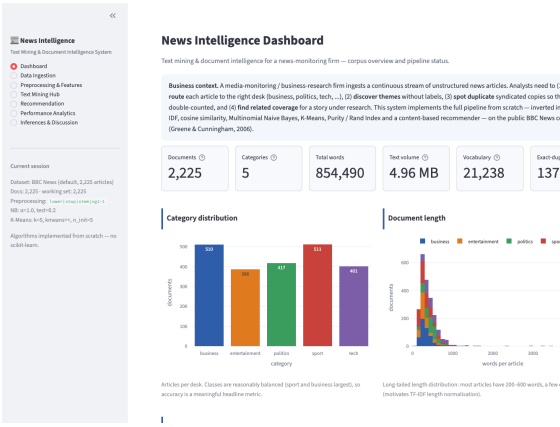



***Figure 7.*** *Dashboard and corpus overview*

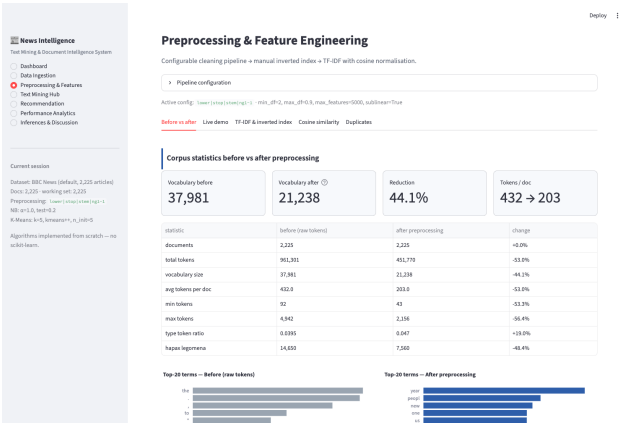



***Figure 8.*** *Preprocessing: before/after distributions*

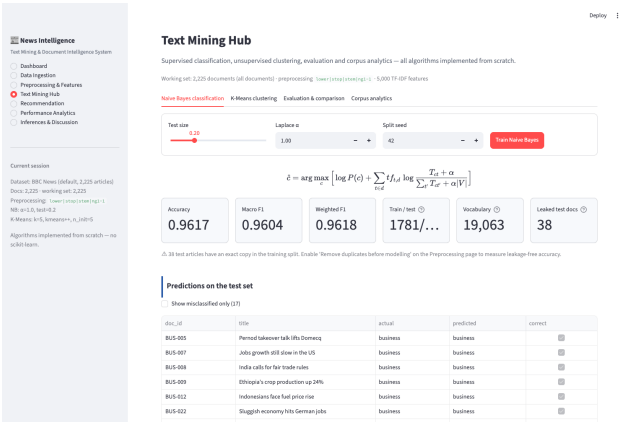



***Figure 9.*** *Naive Bayes classification*

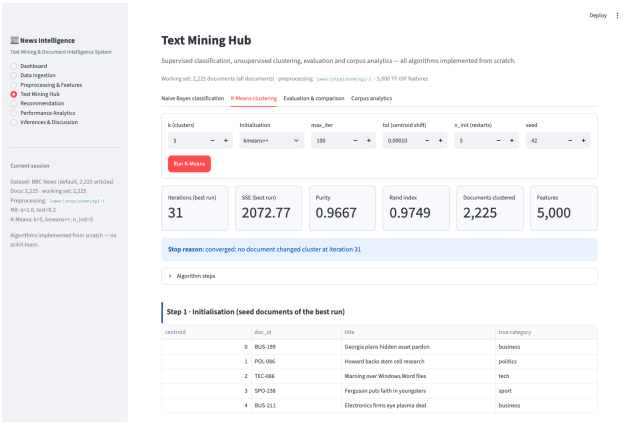



***Figure 10.*** *K-Means clustering steps*

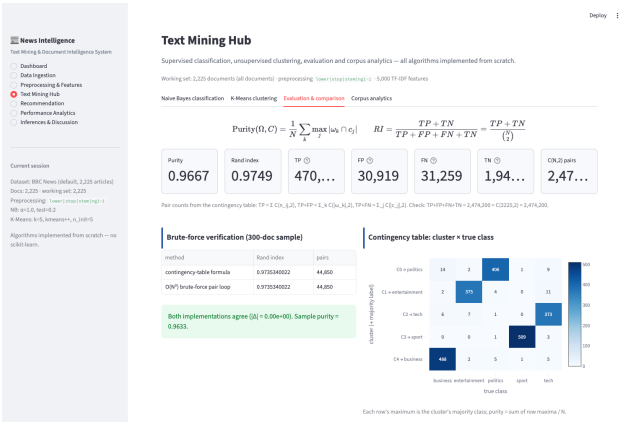



***Figure 11.*** *Evaluation and comparison*

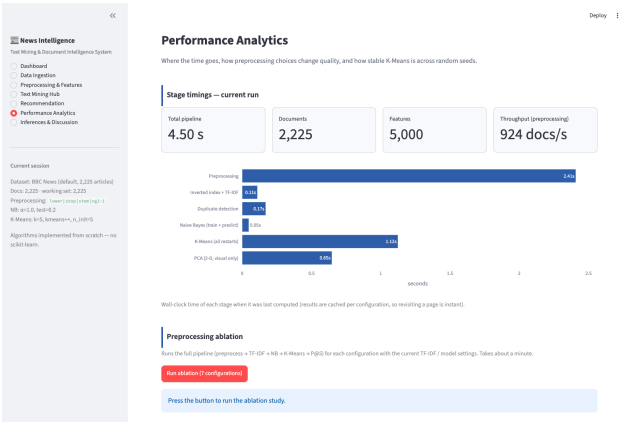



***Figure 12.*** *Performance analytics*

## Appendix: how to run and references

```
pip install -r requirements.txt
streamlit run app.py
python experiments.py # regenerates report/results.json and figures (seed 42)
python report/build_report.py # rebuilds this PDF
```


- D. Greene, P. Cunningham. Practical Solutions to the Problem of Diagonal Dominance in Kernel Document Clustering. ICML 2006 (BBC dataset).
- C. D. Manning, P. Raghavan, H. Schuetze. Introduction to Information Retrieval. Cambridge University Press, 2008 (Ch. 6, 13, 16).
- M. F. Porter. An algorithm for suffix stripping. Program 14(3), 1980.
- D. Arthur, S. Vassilvitskii. k-means++: The Advantages of Careful Seeding. SODA 2007.
- W. M. Rand. Objective criteria for the evaluation of clustering methods. JASA 66(336), 1971.