

12

Matrix Chain Multiplication



Dr. Kamlesh Tiwari

Assistant Professor, Department of CSIS,
BITS Pilani, Pilani Campus, Rajasthan-333031 INDIA

Feb 12, 2021

ONLINE (Campus @ BITS-Pilani Jan-May 2021)

<http://ktiwari.in/algo>

Matrix-chain multiplication

- Given a sequence (chain) $\langle A_1, A_2, \dots, A_n \rangle$
- Wish to compute matrix product in minimum number of steps.
- Parenthesize** $\langle A_1, A_2, A_3, A_4 \rangle$
 $A_1(A_2(A_3A_4)), A_1((A_2A_3)A_4), (A_1A_2)(A_3A_4), (A_1(A_2A_3))A_4,$
 $((A_1A_2)A_3)A_4$ There are 5 ways
- Let $P(n)$ be the number of ways to parenthesize n matrices then

$$P(n) = \begin{cases} 1 & \text{if } n = 1 \\ \sum_{k=1}^{n-1} P(k) \times P(n-k) & \text{otherwise} \end{cases}$$

- Its solution is **Catalan number** $P(n) = C(n-1)$, where

$$C(n) = \frac{1}{n+1} \binom{2n}{n} \quad C_n = \Omega(4^n/n^{3/2})$$

Matrix-chain multiplication


Algorithm 2: Matrix-Chain-Order(p)

```

1 n = length[p] - 1
2 for i = 1 to n do
3   m[i][i] = 0
4   for l = 2 to n do
5     for i = 1 to n-l+1 do
6       j = i+l-1
7       m[i][j] = ∞
8       for k = i to j-1 do
9         q = m[i][k] + m[k+1][j] + p[i-1]p_kp_j
10        if q < m[i][j] then
11          m[i][j] = q
12          s[i][j] = k

```

Matrix Multiplication

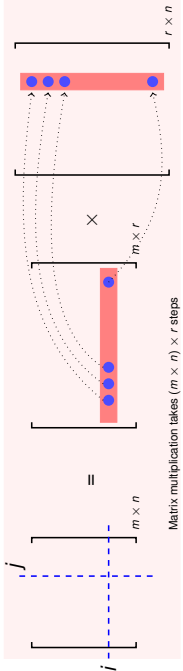

- To multiply three matrices A, B and C of size $u \times v$, $v \times w$ and $w \times z$ respectively, one can do it in two ways
 - $(A \times B) \times C$: takes $u \times v \times w + w \times w \times z$ steps
 - $A \times (B \times C)$: takes $u \times v \times z + v \times v \times w$ steps
- For $(u, v, w, z) = (5, 1, 3, 10)$ it is 165 and 80 respectively

How to determine minimum steps for $(V_1, V_2, V_3, \dots, V_n)$

Design & Analysis of Algo. (BITS F364)

M W F (3-4PM) online@BITS-Pilani

Lecture-12(Feb 12, 2021)

2 / 7

Matrix-chain multiplication

- Let matrix A_i has dimension $p_{i-1} \times p_i$ and the sequence $\langle p_0, p_1, \dots, p_n \rangle$ represents all input matrices dimensions
- DP want 1) Optimal substructure, 2) Overlapping subproblems
- DP maintains two matrices m and s as below

Algorithm 1: Matrix-Chain-Multiply(A, s, i, j)

```

1 if j > i then
2   X = Matrix-Chain-Multiply( A, s, i, s[i][j])
3   Y = Matrix-Chain-Multiply( A, s, s[i][j]+1, j)
4   return X x Y
5 else
6   return A_i

```

Design & Analysis of Algo. (BITS F364)


M W F (3-4PM) online@BITS-Pilani

Lecture-12(Feb 12, 2021)

3 / 7

Matrix-chain multiplication

- Consider $p = \langle 30, 35, 15, 5, 10, 20, 25 \rangle$

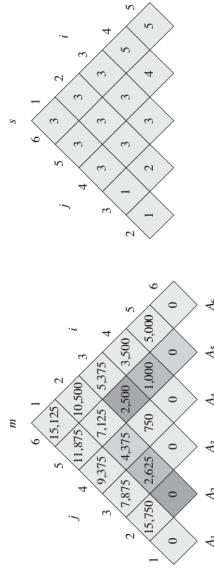

Design & Analysis of Algo. (BITS F364)

M W F (3-4PM) online@BITS-Pilani

Lecture-12(Feb 12, 2021)

5 / 7

Design & Analysis of Algo. (BITS F364)

M W F (3-4PM) online@BITS-Pilani

Lecture-12(Feb 12, 2021)

6 / 7

Thank You!

Thank you very much for your attention! (Reference¹)

Queries ?

¹[1] Book - *Introduction to Algorithms* By THOMAS H. CORMEN, CHARLES E. LEISERSON, RONALD L. RIVEST, CLIFFORD STEIN

Design & Analysis of Algo. (BITS F364) MW F (3-4PM) online@BITS-Pilani Lecture-12(Feb 12, 2021) 7/7