



BITS Pilani
Pilani Campus

Theory of Computation

CS F351

Vishal Gupta

Department of Computer Science and Information Systems
Birla Institute of Technology and Science
Pilani Campus, Pilani




Lecture: 31

Question



Make a Single Tape TM for $L = \{a^n b^n c^n \mid n \geq 0\}$.

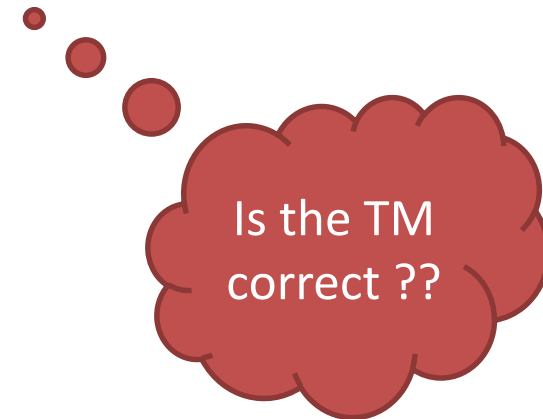

Multi-Tape TM



- Let $k \geq 1$ be an integer. A k -tape TM is a quintuple $(K, \Sigma, \delta, s, H)$. δ is defined as follows:

$$(K-H) \times \Sigma^k \text{ to } K \times (\Sigma \cup \{\rightarrow, \leftarrow\})^k$$

- Configuration of a k -tape TM:

$$(q, (w_1 \underline{a}_1 u_1, w_2 \underline{a}_2 u_2, \dots, w_k \underline{a}_k u_k))$$

Multi-Tape TM



Design a 2-tape TM for adding two binary numbers. The initial configuration of Tape-1 is $\triangleright \underline{\quad} w1; w2$ and that of tape-2 is $\triangleright \underline{\quad}$. Finally, tape-2 should contain the result of $w1 + w2$.

Proof:





