EXPERIMENT 15 PPS: Car dealership sales system

A] ALGORITHM:

Step 1: Start

Step 2: Define a base class Car

- Declare attributes: brand, price, model, color

Step 3: Define constructor __init__()

- Initialize all attributes using input values

Step 4: Define method display_details()

- Print brand, price, model, and color (each on separate line)

Step 5: Define derived class Car1

- Inherit from class Car
- Override method display_details() to print details

Step 6: Define derived class Car2

- Inherit from class Car
- Override method display_details() to print details

Step 7: Read input for first car

- Store values: brand1, price1, model1, color1

Step 8: Read input for second car

- Store values: brand2, price2, model2, color2

Step 9: Create object car1 of class Car1

- Pass first car details

Step 10: Create object car2 of class Car2

- Pass second car details

Step 11: Call display_details() for car1

- Print first car details

Step 12: Call display_details() for car2

- Print second car details

Step 13: Stop

B]FLOWCHART:

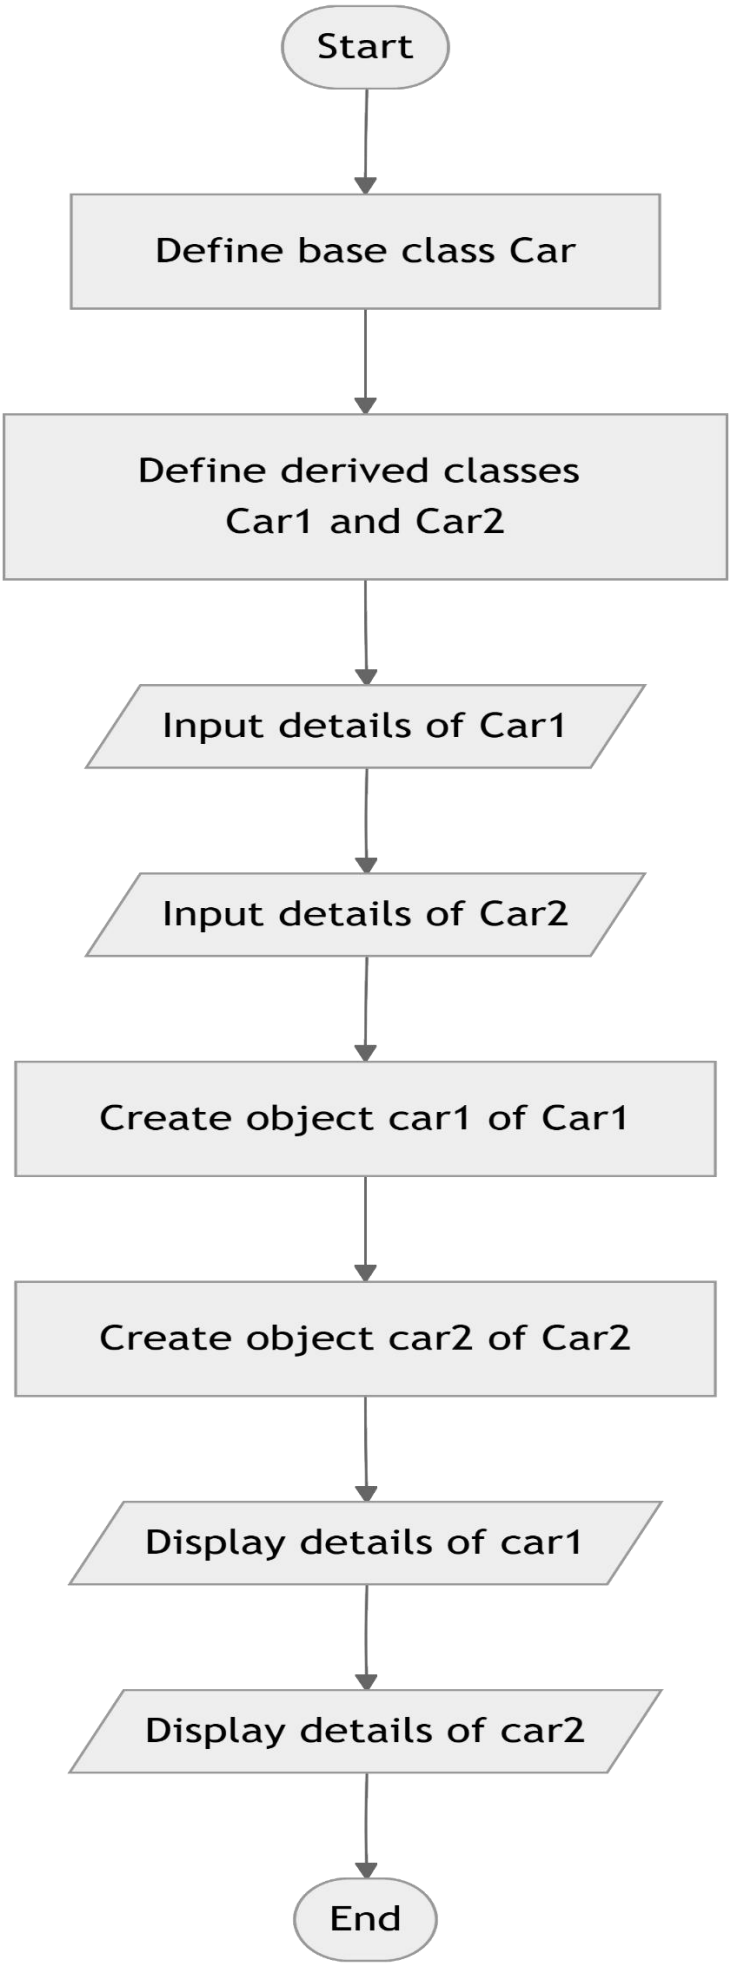
Start
Define base class Car
Define derived classes
Car1 and Car2
Input details of Car1
Input details of Car2
Create object car1 of Car1
Create object car2 of Car2
Display details of car1
Display details of car2
End

C]CODETANTRA:

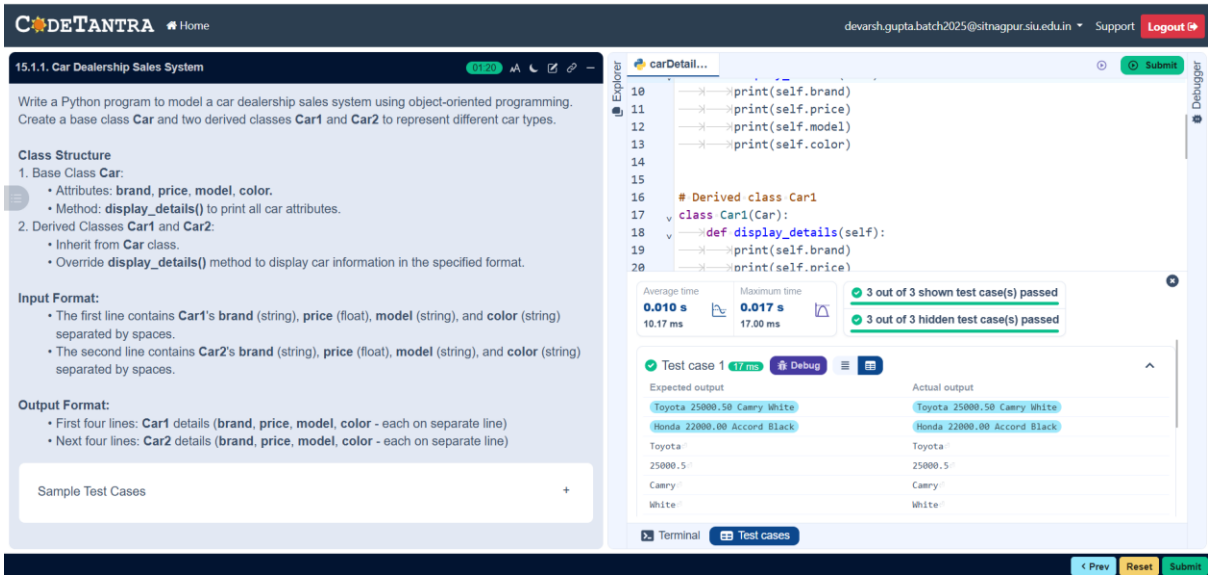

D] code:

```
class Car:
    def __init__(self, brand, price, model, color):
        self.brand = brand
        self.price = price
        self.model = model
        self.color = color

    def display_details(self):
        print(self.brand)
        print(self.price)
        print(self.model)
        print(self.color)
```

Derived Class Car1

```
class Car1(Car):
    def display_details(self):
        print(self.brand)
        print(self.price)
        print(self.model)
        print(self.color)



# Derived Class Car2
class Car2(Car):
    def display_details(self):
        print(self.brand)
        print(self.price)
        print(self.model)
        print(self.color)
# Read input
car1_data = input().split()
brand1, price1, model1, color1 = car1_data[0], float(car1_data[1]), car1_data[2], car1_data[3]

car2_data = input().split()
brand2, price2, model2, color2 = car2_data[0], float(car2_data[1]), car2_data[2], car2_data[3]

# Create objects
car1 = Car1(brand1, price1, model1, color1)
car2 = Car2(brand2, price2, model2, color2)

# Display details
car1.display_details()
car2.display_details()
```