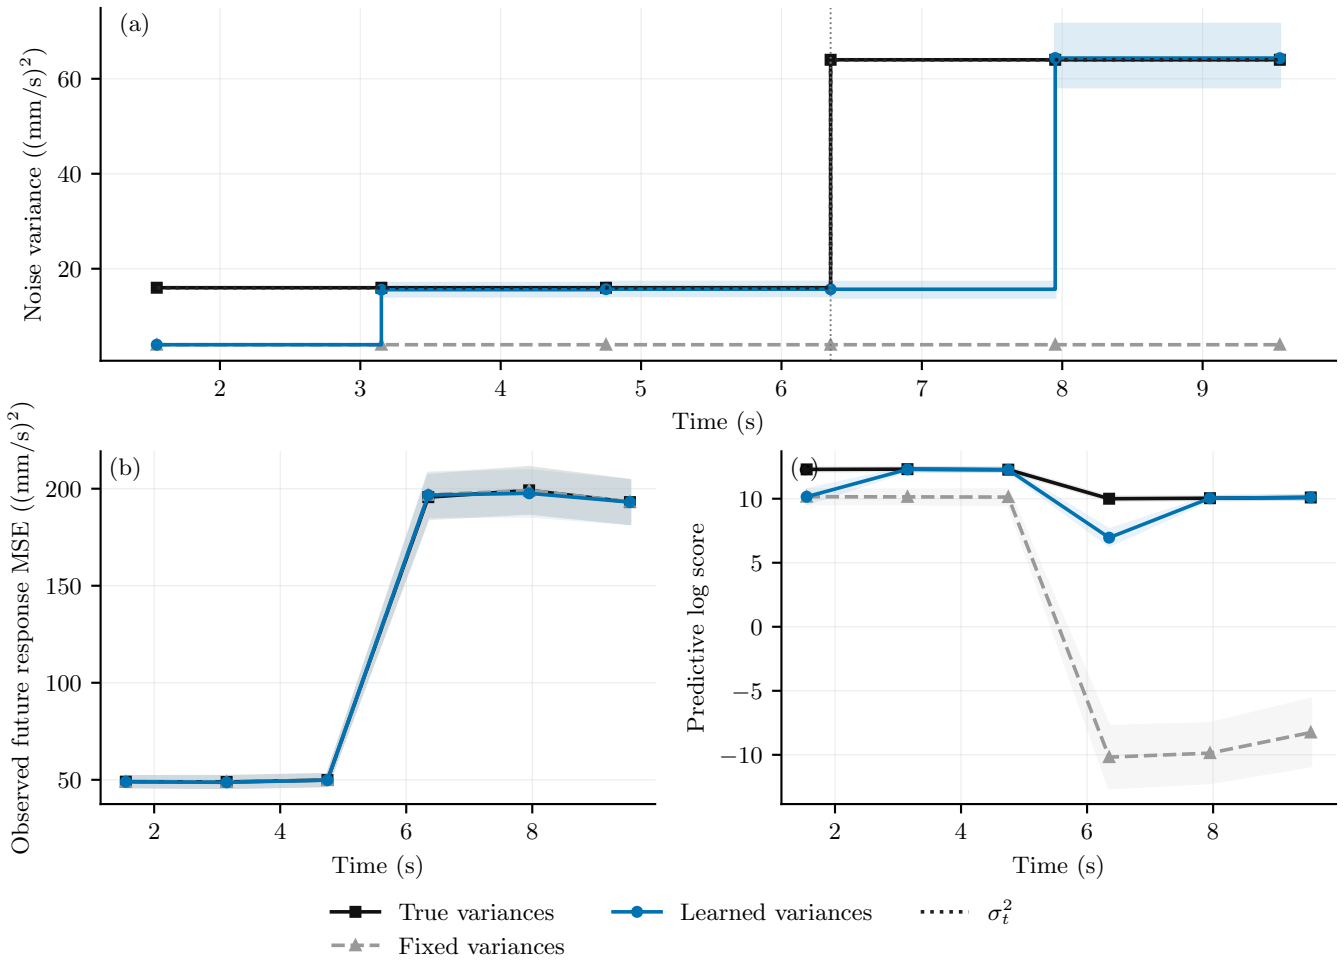
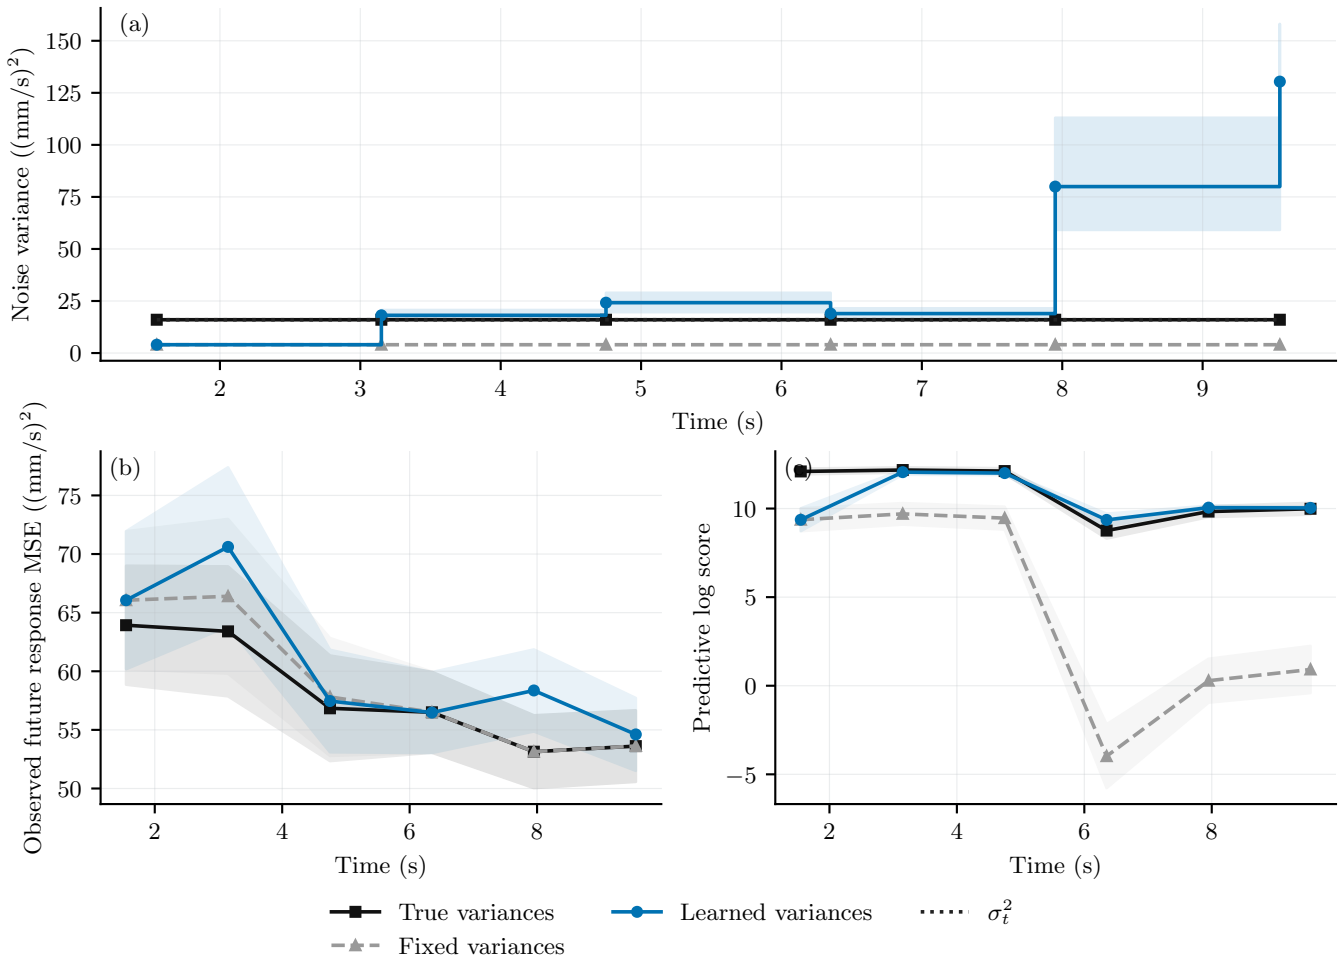
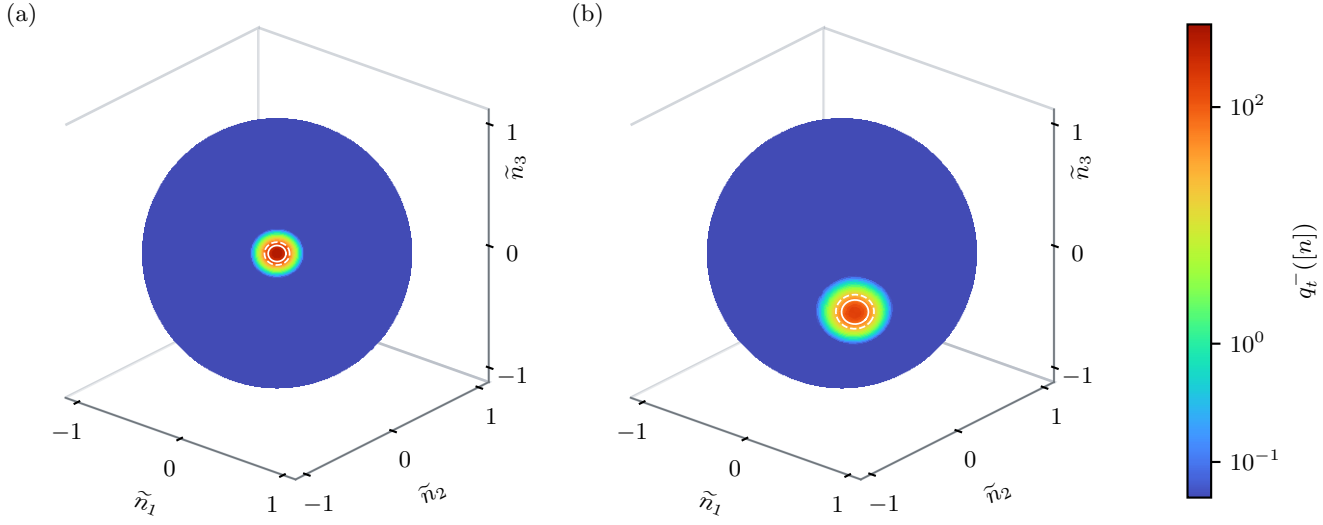
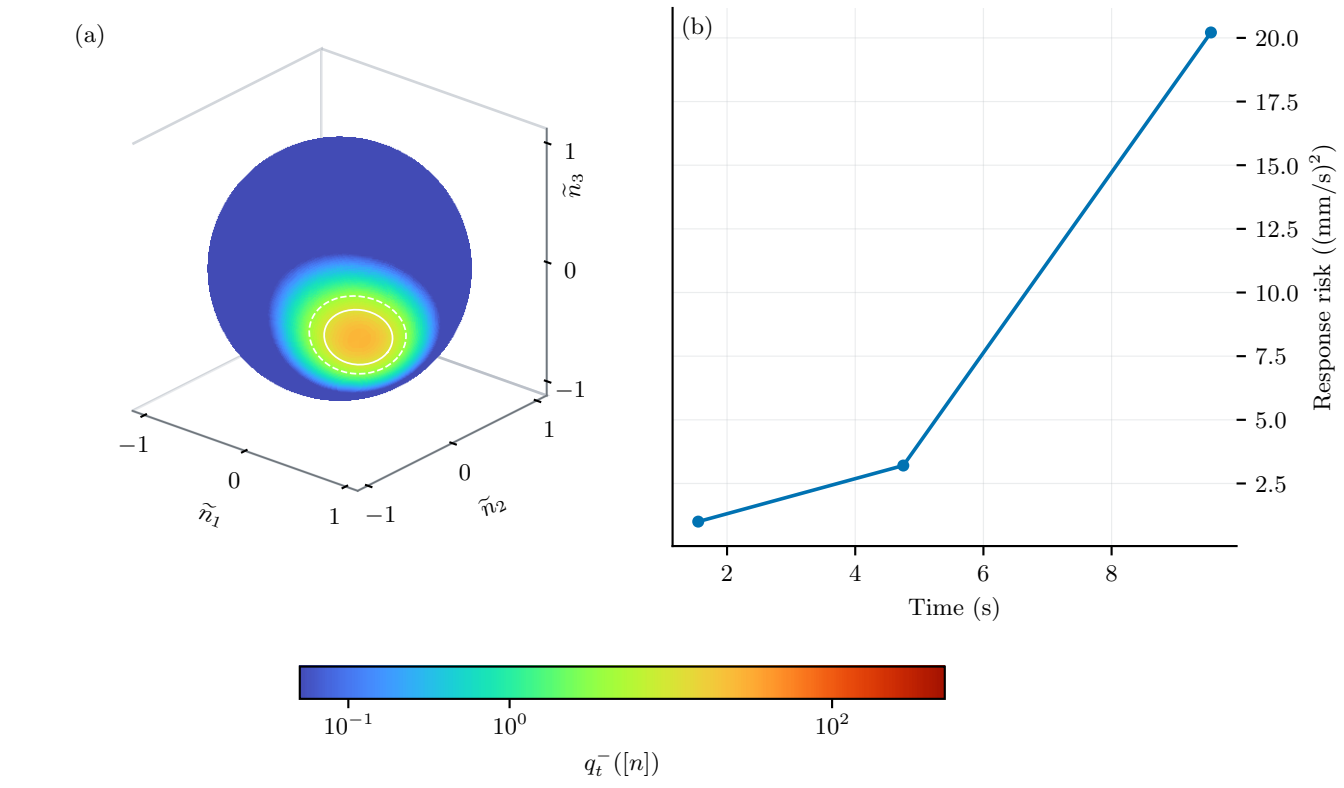

(a)
Noise variance ((mm/s)^2)
60
40
20
2
3
4
5
6
7
8
9
Time (s)
(b)
Observed future response MSE ((mm/s)^2)
200
150
100
50
2
4
6
8
Time (s)
(c)
Predictive log score
10
5
0
−5
−10
2
4
6
8
Time (s)
True variances
Learned variances
σ_t^2
Fixed variances


(a)
Noise variance ((mm/s)^2)
Time (s)
(b)
Observed future response MSE ((mm/s)^2)
Time (s)
(c)
Predictive log score
Time (s)
True variances
Learned variances
σ_t^2
Fixed variances


(a)
(b)
$\widetilde{n}_3$
1
0
−1
$\widetilde{n}_1$
$\widetilde{n}_2$
$q_t^-([n])$
10^2
10^0
10^{-1}


(a)
$\widetilde{n}_3$
1
0
−1
$\widetilde{n}_1$
$\widetilde{n}_2$
(b)
Response risk ((mm/s)^2)
20.0
17.5
15.0
12.5
10.0
7.5
5.0
2.5
2
4
6
8
Time (s)
10^{-1}
10^{0}
10^{2}
$q_t^-([n])$