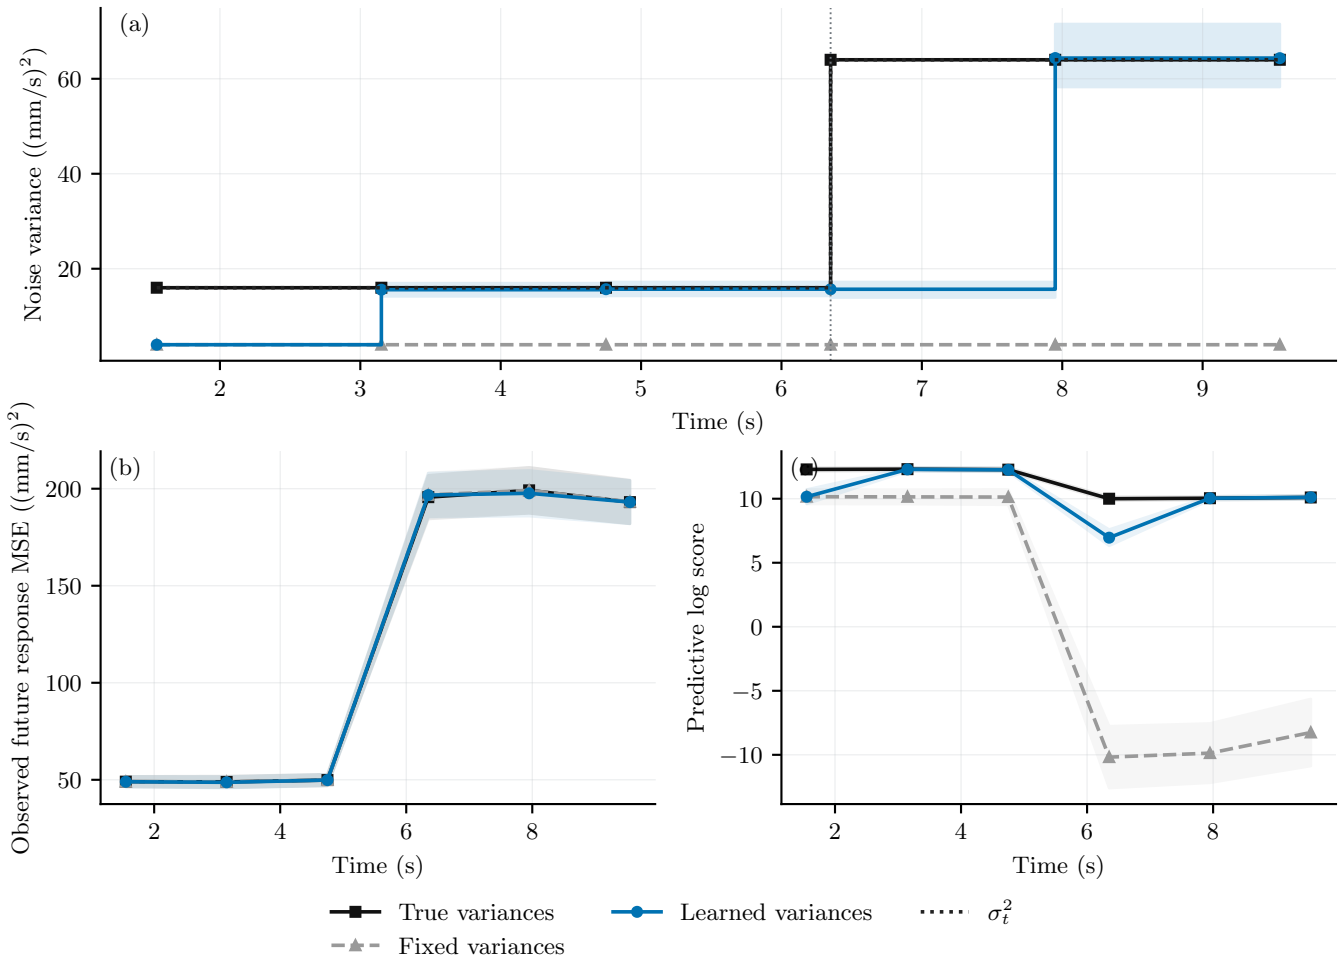
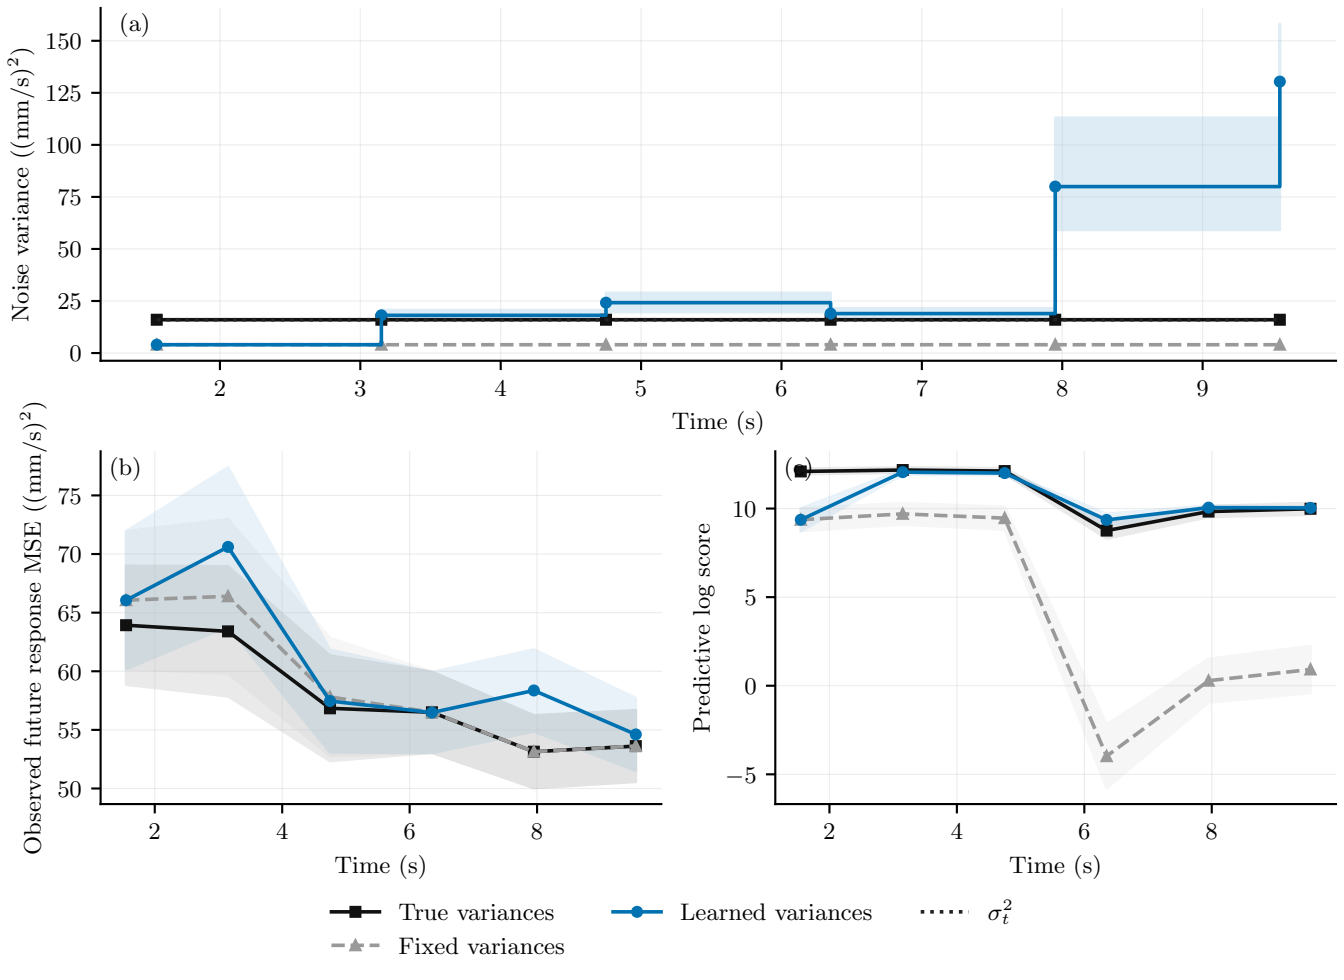
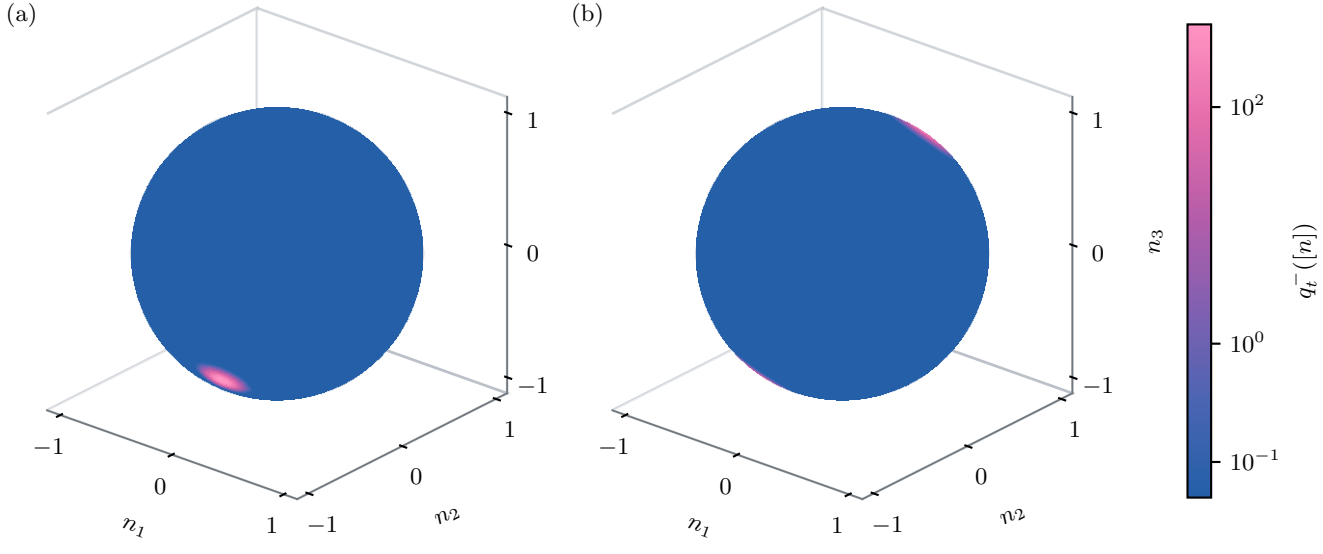
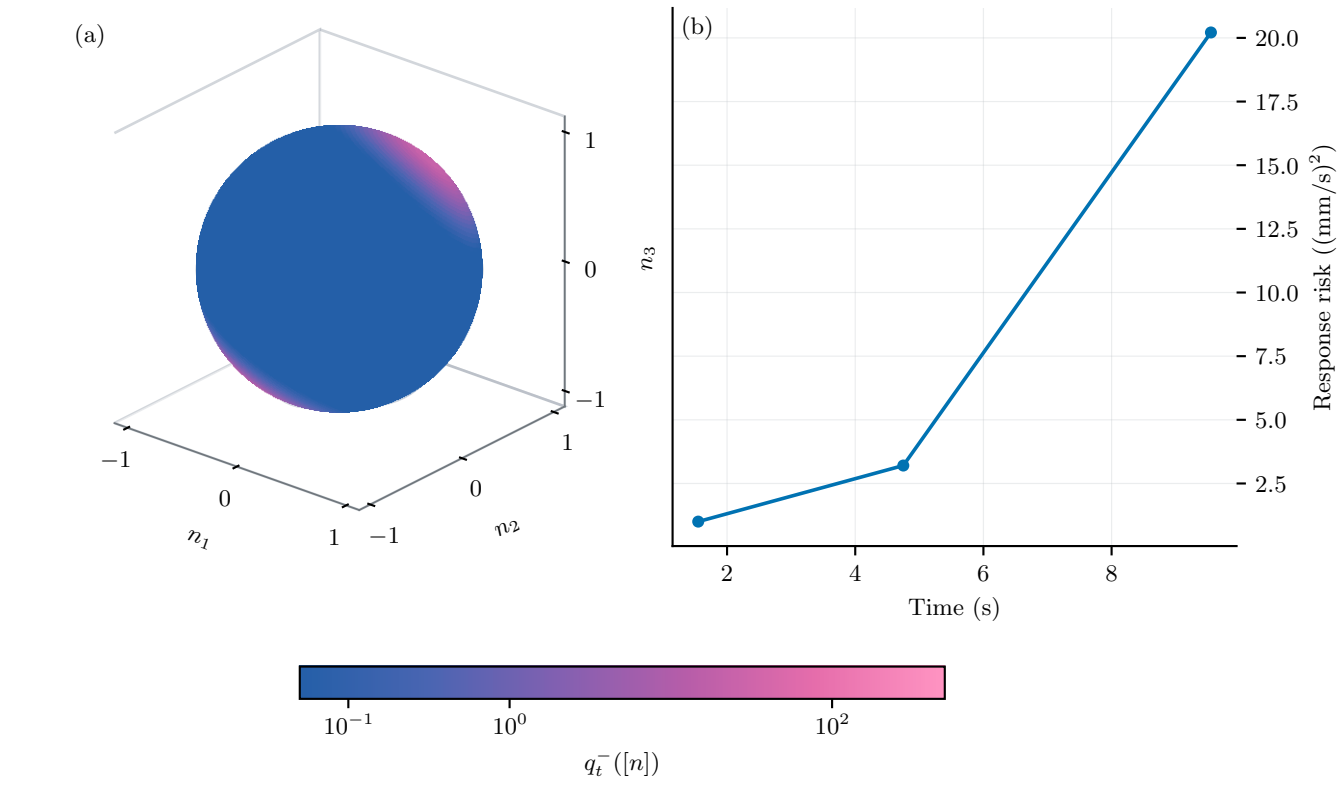

(a)
Noise variance ((mm/s)$^2$)
60
40
20
2
3
4
5
6
7
8
9
Time (s)
(b)
Observed future response MSE ((mm/s)$^2$)
200
150
100
50
2
4
6
8
Time (s)
(c)
Predictive log score
10
5
0
−5
−10
2
4
6
8
Time (s)
True variances
Learned variances
$\sigma_t^2$
Fixed variances


(a)
Noise variance ((mm/s)$^2$)
Time (s)
(b)
Observed future response MSE ((mm/s)$^2$)
Time (s)
(c)
Predictive log score
Time (s)
True variances
Learned variances
$\sigma_t^2$
Fixed variances


(a)
(b)
1
0
−1
$n_1$
$n_2$
$n_3$
$10^2$
$10^0$
$10^{-1}$
$q_t^-([n])$


(a)
1
0
−1
−1
0
1
$n_1$
−1
0
1
$n_2$
(b)
$n_3$
20.0
17.5
15.0
12.5
10.0
7.5
5.0
2.5
Response risk ((mm/s)$^2$)
2
4
6
8
Time (s)
$10^{-1}$
$10^{0}$
$10^{2}$
$q_t^-([n])$